
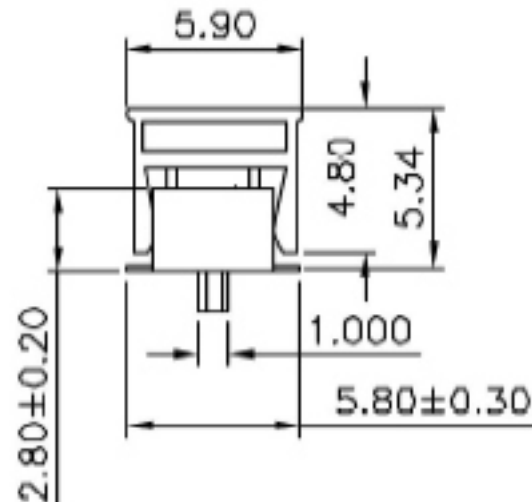


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

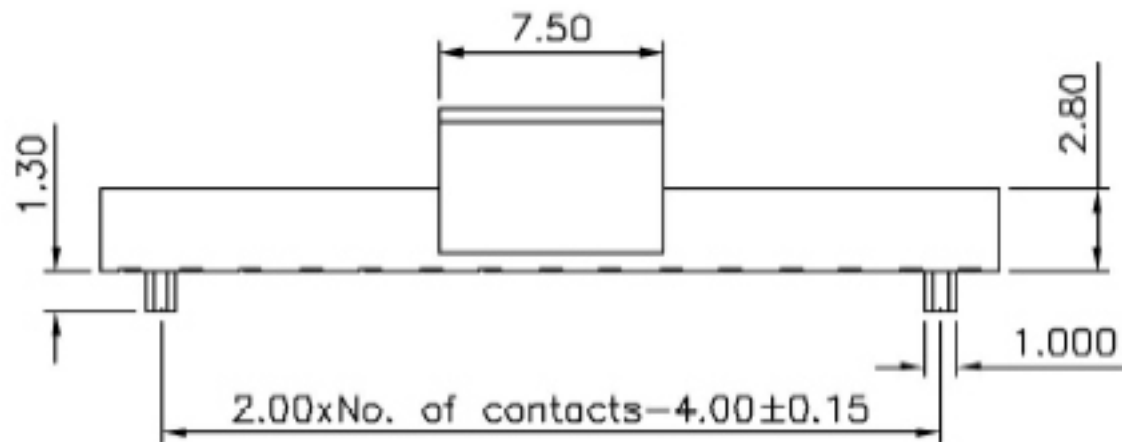


Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulator Material: Polyester, (UL94V-0)
 NYLON 6T

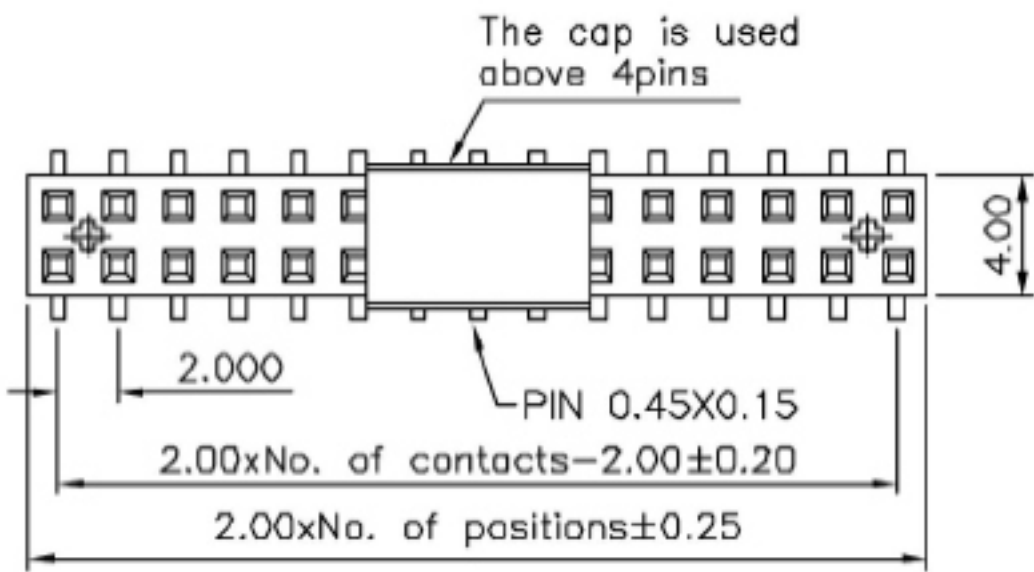


HOW TO ORDER:

MAT-[]-[D]-[R]-[]-B-2.0-SMD-P2.7-[C]-[]
 1 2 3 4 5 6

- 1- Nr. of Ways
Double Row: 2 to 80
- 2- Row Version:
(D)-Double Row
- 3- Pin Style
(N)-90°
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn
- 5- (C) Location Cap
- 6- (R) RoHS Compliant

RECOMMENDED P.C.B LAYOUT

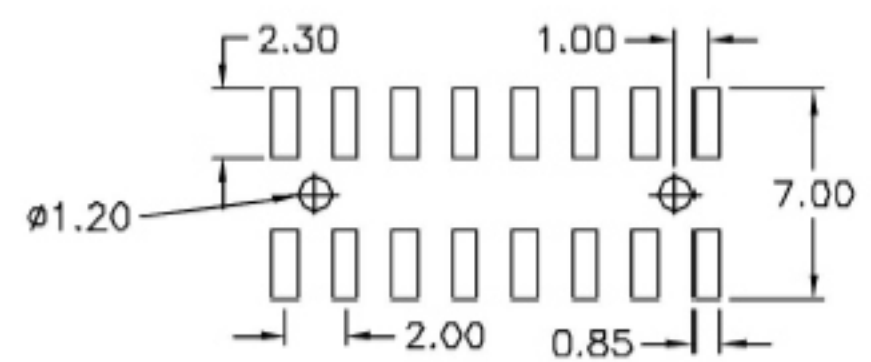

		MATRIX TECNOLOGIA IND. E COM. LTDA.	
UNIT mm	SCALE	TITLE 2.0mm FEMALE HEADER DUAL ROW HEIGHT 2.7mm SMD W/LOCATING CAP	DATE SEPTEMBER 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO