


REV	ECN NO.	APP	DATE
A	EDIÇÃO INICIAL		

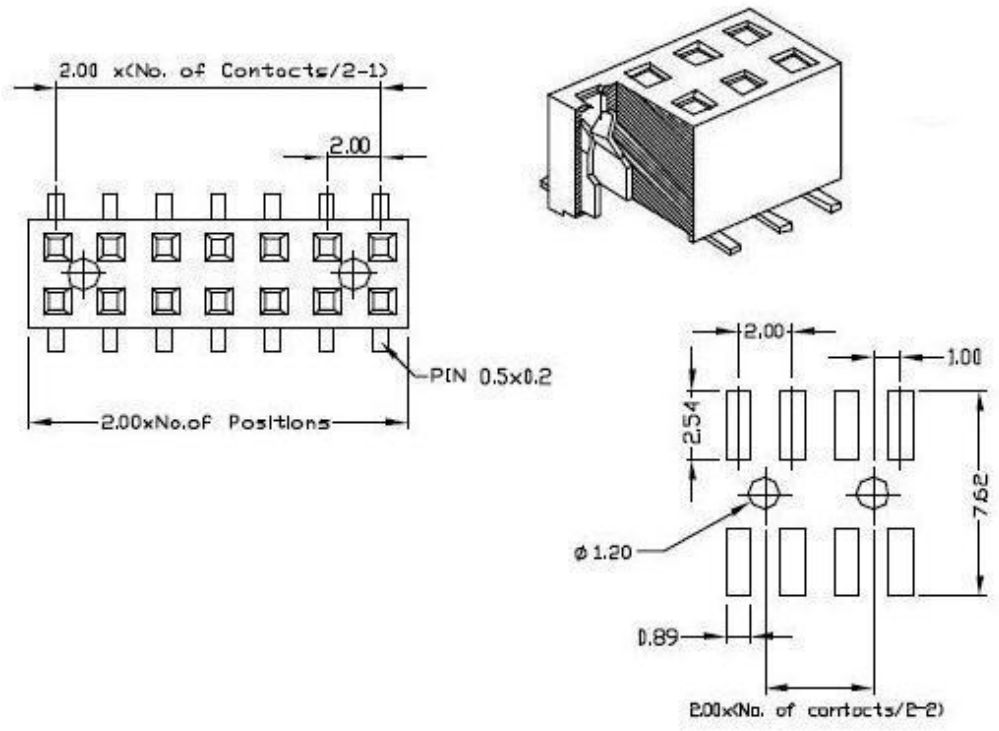


**APPLICATION AND FEATURES**

1. Low profile: 4.3mm or 4.5mm height.
2. High quality dual beam phosphor brone contacts.
3. Designed for board to board small spacing interconnection.
4. Mating with 2.00 pitch □ 0.5mm Pin Headers.

**SPECIFICATIONS**


Current Rating: 1 Amps  
 Insulator resistance: 5000 Megohms min.  
 Contact resistance: 20 m ohm Max.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40° ~ +105°C  
 Max Processing Temp: 230° for 30 seconds  
 Contact Material: Phosphor Bronze.  
 Insulator Material: Polyester, UL 94V-0  
 © Standard: Nylon 6T

Finish: Tin, Gold plated  
 © Standard: Gold flash all over

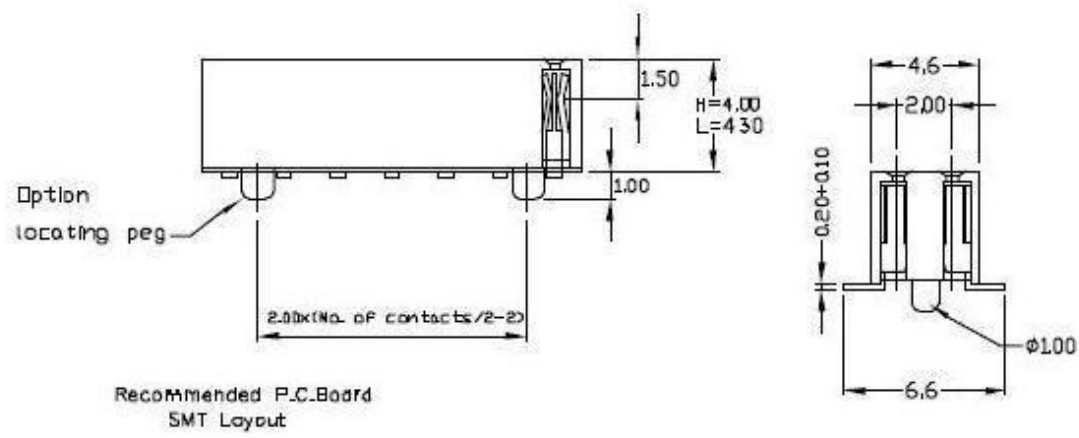

**How to Order**

**MAT - [ ] - [ ] - [ ] - [ ] - [s] - 2 - SMD - [ ]**

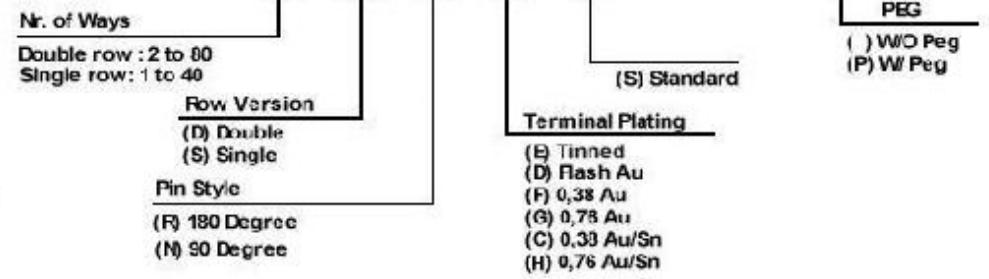

<b>MATRIX</b>				<b>MATRIX Tecnologia Ind. e Com. Ltda.</b>			
0.0±	SCALE	TITLE	DATE				
0.00±	UNIT	MAT - XX - DRDS	APP BY				
0.000±	mm	2 - SMD	CHK BY				
		MATL	DR BY	<b>CLAYTON</b>			
		DWG. NO.					