


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

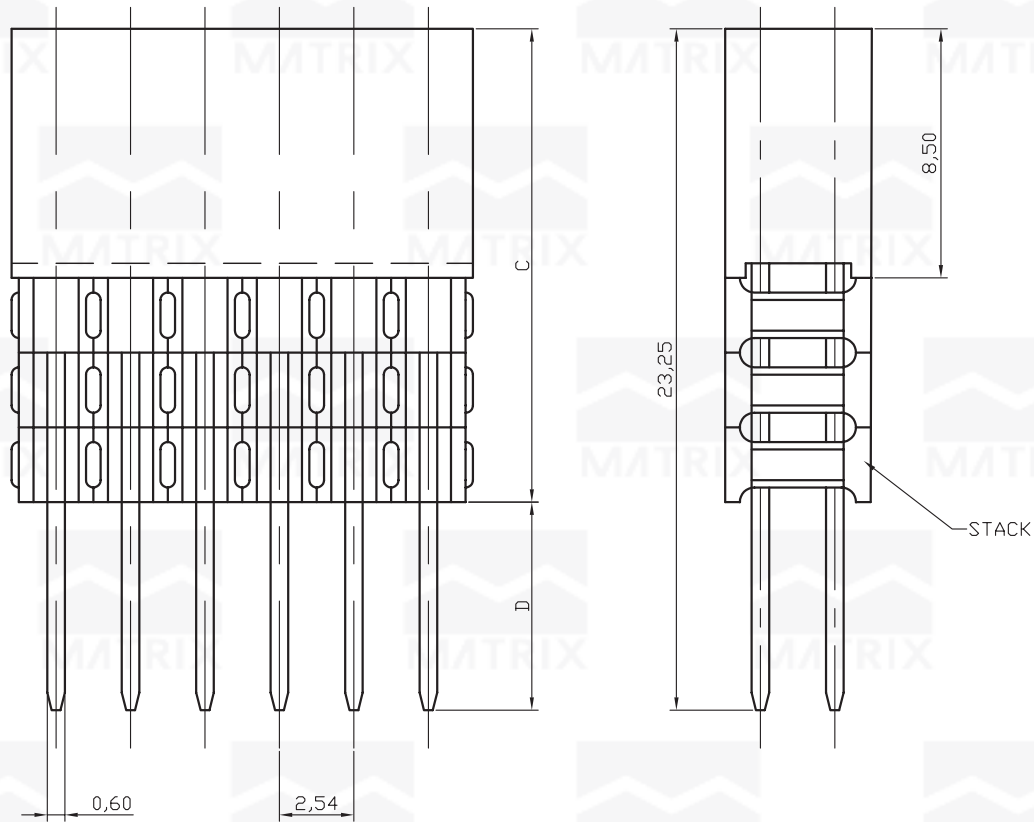


**SPECIFICATION**

Current Rating: 3Amp  
 Insulator Resistance: 5000megΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40°C to 105°C  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyestes, UL 94V-0  
 Standard: P.B.T

**HOW TO ORDER:  
 MAT-[ ]-[D]-[R]-[ ]-[S]-[ ]S-[ ]**

**1 2 3 4 5 6**

- 1- Nr. of Ways  
 Single Row: 1 to 40  
 Double Row: 2 to 80
- 2- Row Version:  
 (S)-Single Row  
 (D)-Double Row
- 3- Pin Style  
 (N)-90°  
 (R)-180°
- 4- Terminal Plating:  
 (E)-Sn  
 (D)-FLASH Au  
 (F)-0,38um Au  
 (G)-0,76um Au  
 (C)-0,38um Au/Sn  
 (H)-0,76um Au/Sn
- 5- Table  
 N° of Stack
- 6- (R)RoHS Compliant

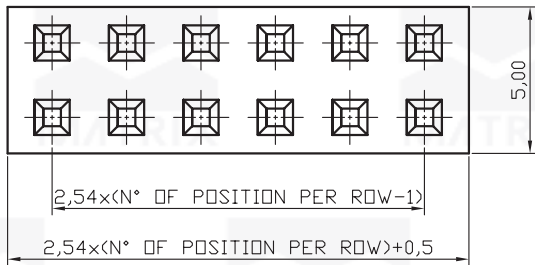

N° OF STACK	C	D
1	11,04	12,20
2	13,58	9,66
3	16,12	7,12
4	18,66	4,58



**MATRIX Tecnologia Ind. e Com. Ltda.**

0.0±	SCALE	TITLE 2.54mm FEMALE HEADER DUAL ROW STRAIGHT	DATE JUNE 2007
0.00±	UNIT mm		APP. BY
0.000±			CHK. BY
		MATL	DR. BY DIEGO
		DWG. NO.	