
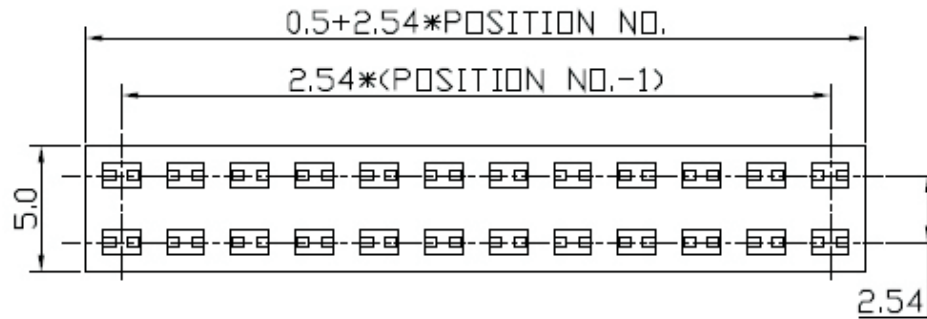




REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

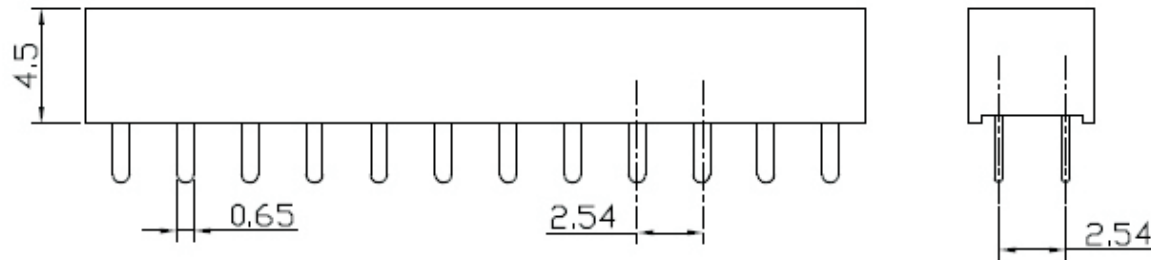

HOW TO ORDER: MAT-[]-[]-[]-[]-S-P4.5-[]

1 2 3 4 5

- | | |
|---------------------------------------|--|
| 1- Nr. of Ways
Double Row: 2 to 52 | 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn |
| 2- Row Version:
(D)-Double Row | 5- (R) RoHS Compliant |
| 3- Pin Style
(N)-90°
(R)-180° | |

		MATRIX Tecnologia Ind. e Com. Ltda.	
UNIT mm	SCALE	TITLE 2.54X2.54mm FEMALE HEADER P: 4,5mm	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego