
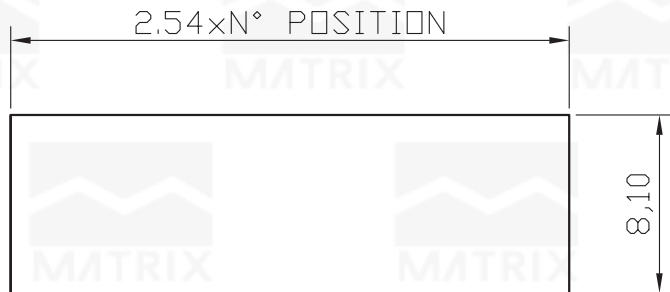


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

MATERIAL
 Insulator - PBT(UL 94V-0)
 Contact-Copper Alloy

SPECIFICATION
 Current Rating: 1Amp DC
 Contact Resistance: 30Milliohm min.
 Dielectric Voltage: 500V AC for One Minute
 Operatint Temperature: -40°C to 105°C

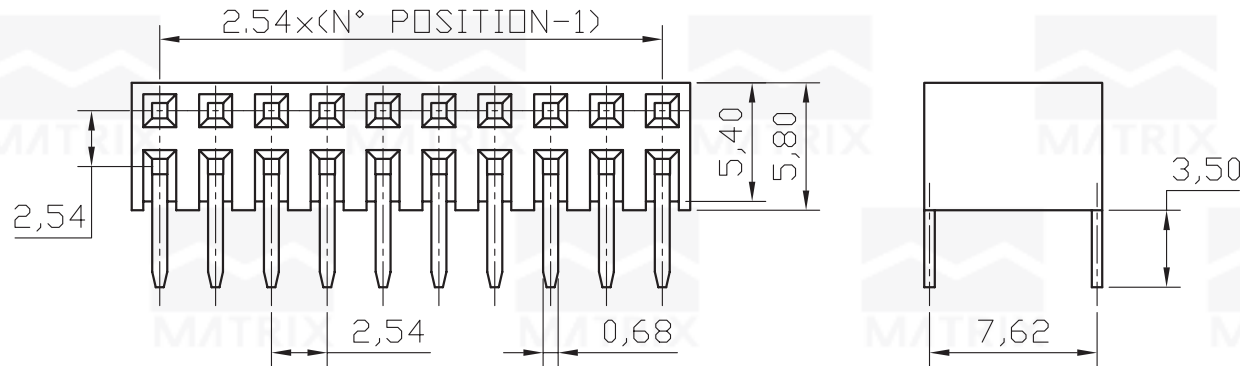

HOW TO ORDER:
MAT-[]-[D]-[R]-[]-S-P5.8-[]
 1 2 3 4 5

- 1- Nr. of Ways
 Single Row: 1 to 40
 Double Row: 2 to 80
- 2- Row Version:
 (S)-Single Row
 (D)-Double Row
- 3- Pin Style
 (N)-90°
 (R)-180°
- 4- Terminal Plating:
 (E)-Sn
 (D)-FLASH Au
 (F)-0,38um Au
 (G)-0,76um Au
 (C)-0,38um Au/Sn
 (H)-0,76um Au/Sn
- 3- (R) RoHS Compliant



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 3:1	TITLE 2.54mm SIDE ENTRY FEMALE HEADER DUAL ROW H=5.8mm	DATE JULY 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO