REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

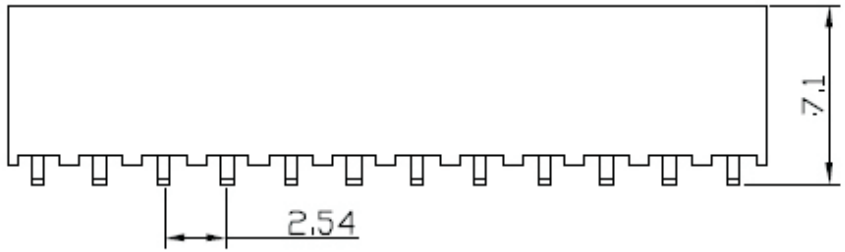

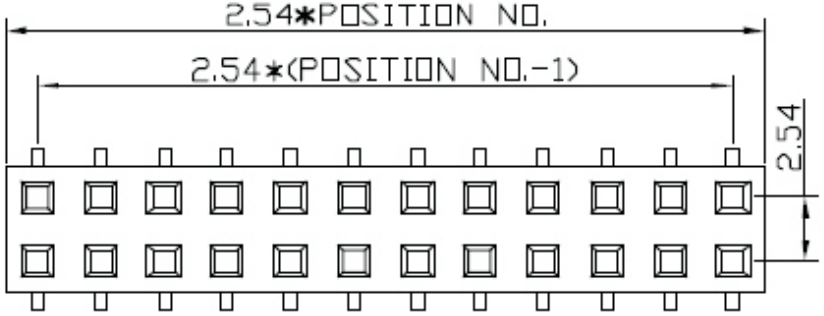



SPECIFICATIONS
Electrical
Current Rating: 1 Amp
Contact Resistance: 30 m ohm max.
Insulation Resistance: 3000 Mohm min.
Dielectric Withstanding Voltage: 500V AC for 1 Minute
Operature Temperature: -40°C to +105°C

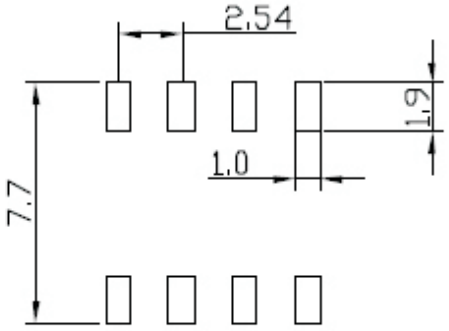

P.C.B. LAYOUT

HOW TO ORDER:

MAT-[ ]-[D]-[R]-[ ]-S-SMD-P 6,4-[ ]
1 2 3 4 5

1- Nr. of Ways
Single Row:1 to 40
Double Row: 2 to 80

2- Row Version:
(D)-Double Row

3- Pin Style
(N)-90°
(R)-180°

4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn

5- (R) RoHS Compliant

MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE	TITLE 2.54mm FEMALE HEADER SMD TYPE H=6.4mm	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego