


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

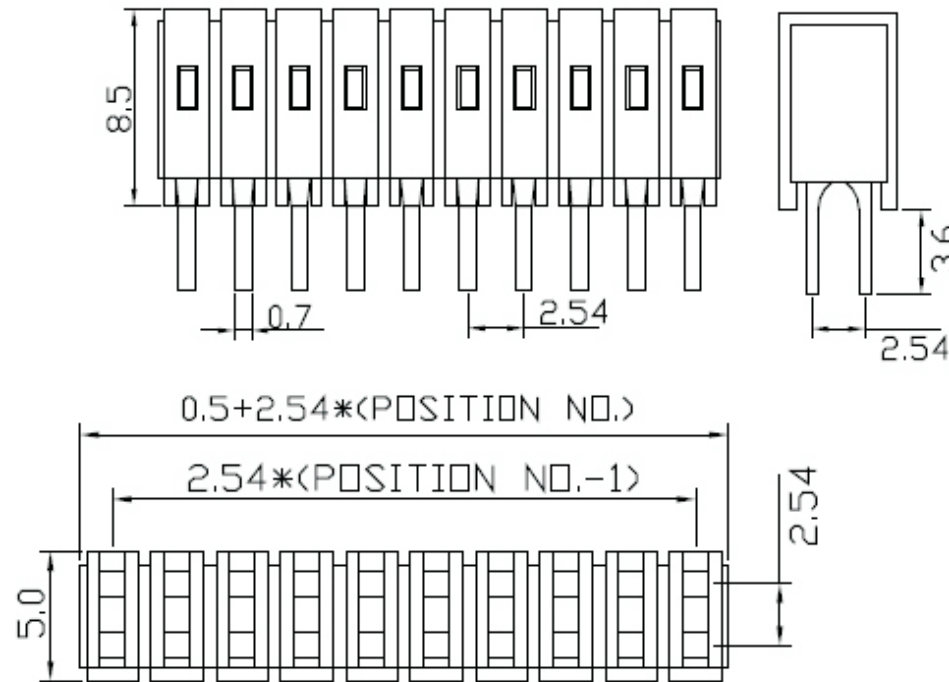

SPECIFICATIONS

CURRENT RATING
1 AMP DC

CONTACT RESISTANCE
30 MILLIOHM MAX.

INSULATION RESISTANCE
1000 MEGOHM MIN.

DIELECTRIC VOLTAGE
500V AC FOR ONE MINUTE

OPERATING TEMPERATURE
-40°C TO 105°C

HOW TO ORDER: MAT-[]-[D]-[R]-[]-S-P8.5-J-[]

- | | |
|--|--|
| 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80 | 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn |
| 2- Row Version:
(D)-Double Row | |
| 3- Pin Style
(N)-90°
(R)-180° | 5- (R) RoHS Compliant |



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE	TITLE 2.54mm FEMALE HEADER H=8.5mm DUAL ROW	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego