
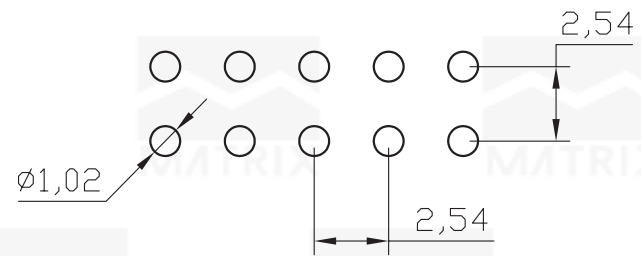
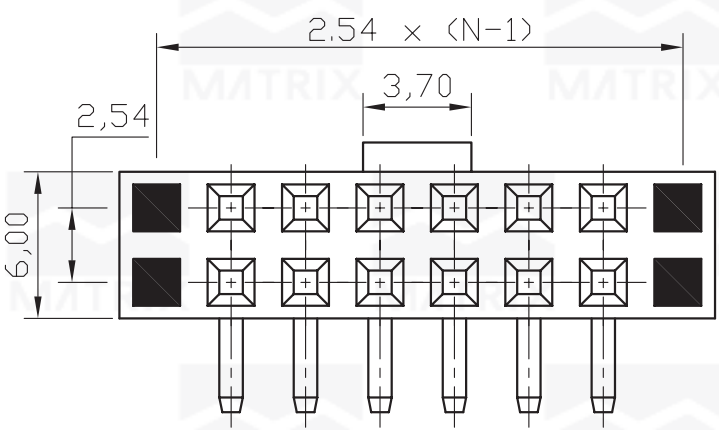


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

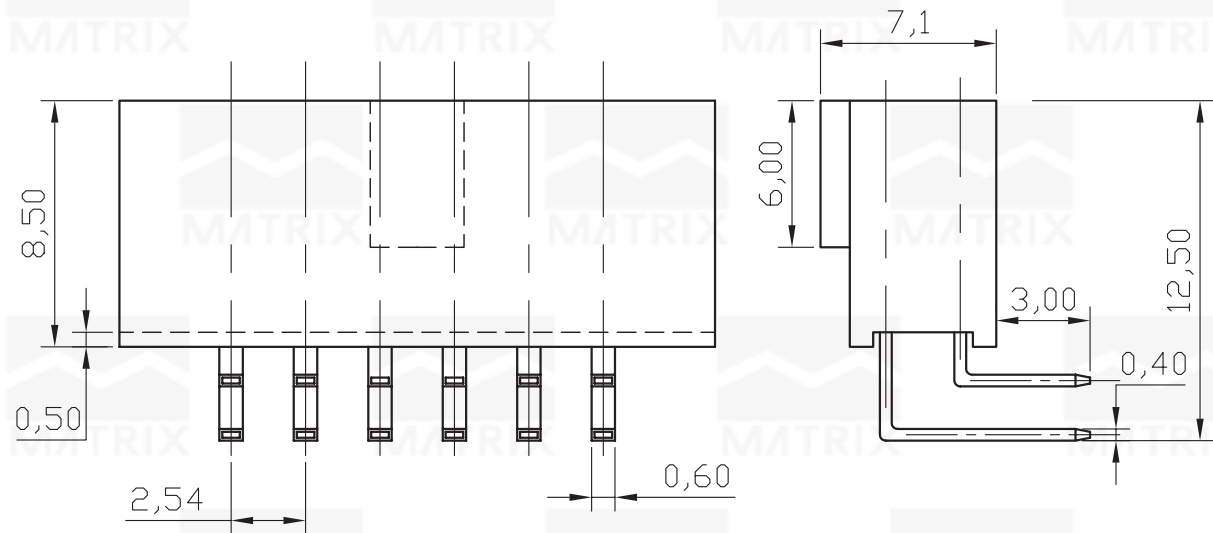

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS

Material
 Insulation: PBT, Glass reinforced, rated UL94V-0
 Contact: Phosphor bronze or Bass

Electrical
 Current Rating: 1Amp
 Contact Resistance: 30mΩ max.
 Insulation Resistance: 3000MΩ min.
 Dielectric Withstanding Voltage: 500V AC for 1 min.
 Operating Temperature: -40°C to 105°C

HOW TO ORDER:
MAT-[]-[D]-[N]-[]-S-WB-[]
1 2 3 4 5

- 1- Nr. of Ways
 Single Row: 1 to 40
 Double Row: 2 to 80
- 2- Row Version:
 (S)-Single Row
 (D)-Double Row
- 3- Pin Style
 (N)-90°
 (R)-180°
- 4- Terminal Plating:
 (E)-Sn
 (D)-FLASH Au
 (F)-0,38um Au
 (G)-0,76um Au
 (C)-0,38um Au/Sn
 (H)-0,76um Au/Sn
- 5- (R)RoHS Compliant

		MATRIX Tecnologia Ind. e Com. Ltda.	
UNIT mm	SCALE 4:1	TITLE 2.54mm FEMALE HEADER DUAL ROW 90° H=8.5mm	DATE JULY 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
DWG. NO.			DR. BY DIEGO