
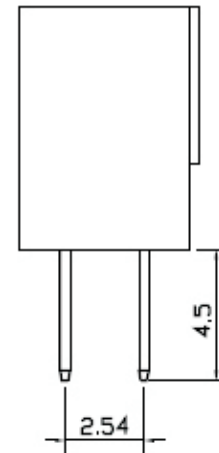
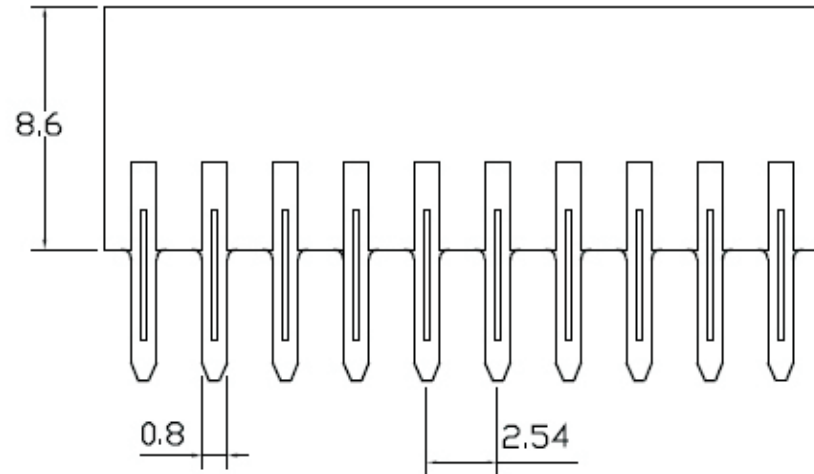


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		





SPECIFICATIONS
 CURRENT RATING
 1 AMP DC
 CONTACT RESISTANCE
 30 MILLIOHM MAX
 INSULATION RESISTANCE
 1000 MEGOHM MIN
 DIELECTRIC VOLTAGE
 500V AC FOR ONE MINUTE
 OPERATING TEMPERATURE
 -40°C TO 105°C

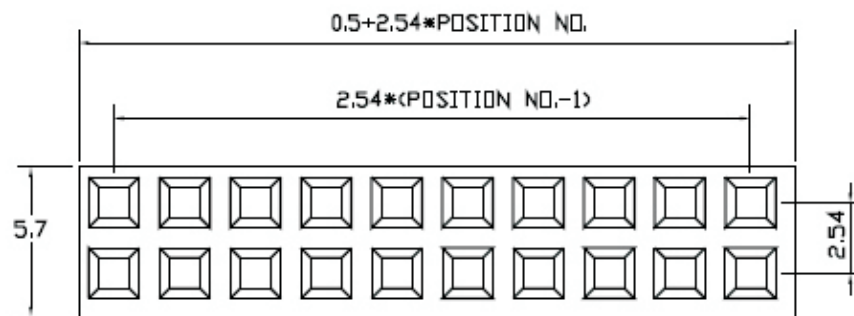

HOW TO ORDER:
MAT-[]-[D]-[R]-[]-S-P8.6-C-[]
1 2 3 4 5

- 1- Nr. of Ways
Double Row: 2 to 80
- 2- Row Version:
(D)-Double Row
- 3- Pin Style
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn
- 5- (R) RoHS Compliant

 MATRIX Tecnologia Ind. e Com. Ltda.		UNIT	SCALE	TITLE	DATE
		mm		FEMALE HEADER 2.54mm PROFILE 8.6mm CUT SIDE	September 2007
		TOLERANCE: ±0.25			APP. BY
		MATL		CHK. BY	
		DWG. NO.		DR. BY Diego	