
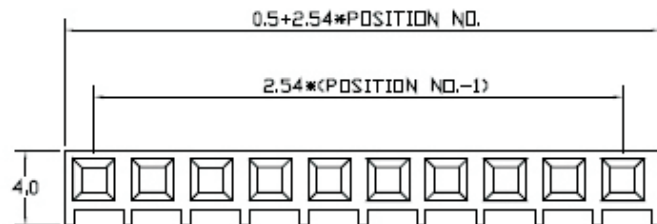



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

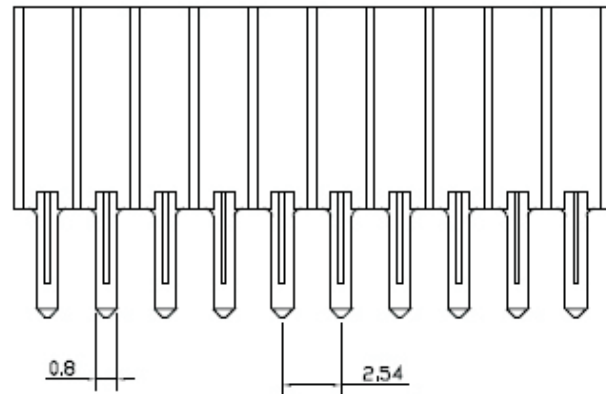



SPECIFICATIONS

CURRENT RATING
1 AMP DC
CONTACT RESISTANCE
30 MILLIOHM MAX
INSULATION RESISTANCE
1000 MEGOHM MIN
DIELECTRIC VOLTAGE
500V AC FOR ONE MINUTE
OPERATING TEMPERATURE
-40°C TO 105°C



HOW TO ORDER: MAT-[]-[S]-[R]-[]-S-P8.6-W-[]

1 2 3 4 5


- | | |
|---|--|
| 1- Nr. of Ways
Single Row 1 to 40
Double Row: 2 to 80 | 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn |
| 2- Row Version:
(S)-Single Row
(D)-Double Row | 5- (R) RoHS Compliant |
| 3- Pin Style
(N)-90°
(R)-180° | |

 MATRIX Tecnologia Ind. e Com. Ltda.		UNIT	SCALE	TITLE	DATE
		mm		P:2.54mm FEMALE HEADER PROFILE 8.6mm STRAIGHT	September 2007
		TOLERANCE: ±0.25			APP. BY
		MATL		CHK. BY	
		DWG. NO.		DR. BY Diego	

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

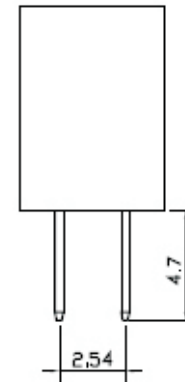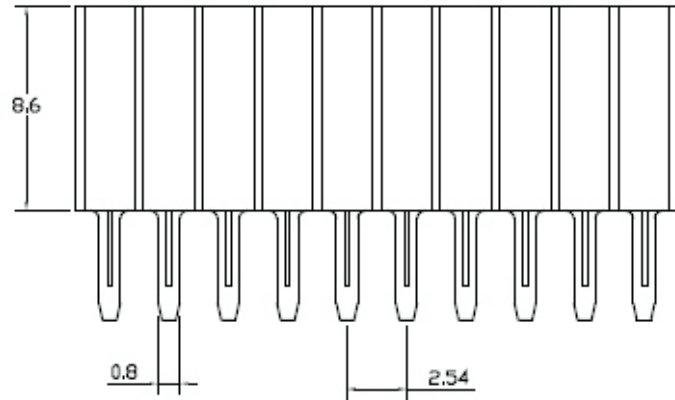



SPECIFICATIONS
 CURRENT RATING
 1 AMP DC
 CONTACT RESISTANCE
 30 MILLIOHM MAX
 INSULATION RESISTANCE
 1000 MEGOHM MIN
 DIELECTRIC VOLTAGE
 500V AC FOR ONE MINUTE
 OPERATING TEMPERATURE
 -40°C TO 105°C

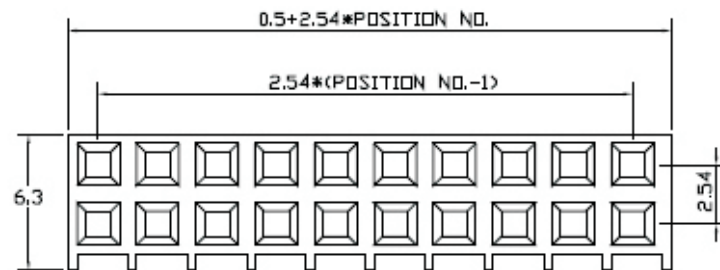

HOW TO ORDER:
MAT-[]-[D]-[R]-[]-S-P8.6-W-[]
1 2 3 4 5

- 1- Nr. of Ways
 Single Row 1 to 40
 Double Row: 2 to 80
- 2- Row Version:
 (S)-Single Row
 (D)-Double Row
- 3- Pin Style
 (N)-90°
 (R)-180°
- 4- Terminal Plating:
 (E)-Sn
 (D)-FLASH Au
 (F)-0,38um Au
 (G)-0,76um Au
 (C)-0,38um Au/Sn
 (H)-0,76um Au/Sn
- 5- (R) RoHS Compliant

 MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE	TITLE 2.54mm FEMALE HEADER HEIGHT 8,6mm 180°	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego