


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	INCLUIDO TABELA 1		15/07/10

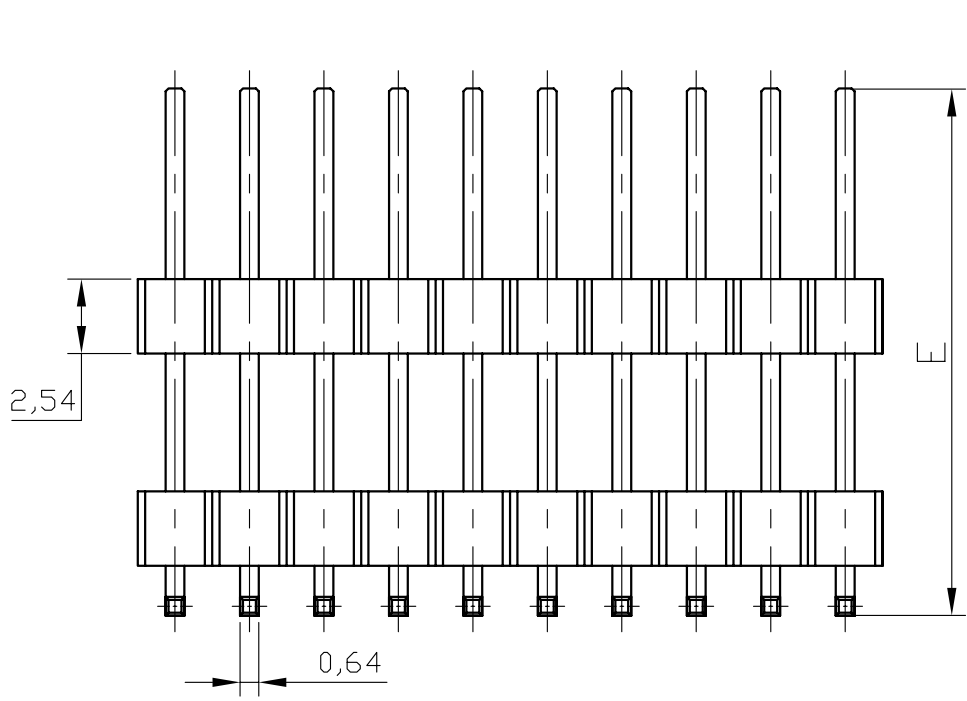

SPECIFICATIONS


Current Rating: 3A
 Operating Temperature: -55°C to 105°C
 Contact Resistance: 20Milliohms Max.
 Insulation Resistance: 100Megaohms Min.
 Withstanding Voltage: AC 100V RMS]

MATERIALS


Housing: Thermoplastic UL 94V-0
 Contact: Copper Alloys

HOW TO ORDER:
MCT[][D][R][][]D[]R
1 2 3 4 5 6

RECOMMENDED P.C.B LAYOUT

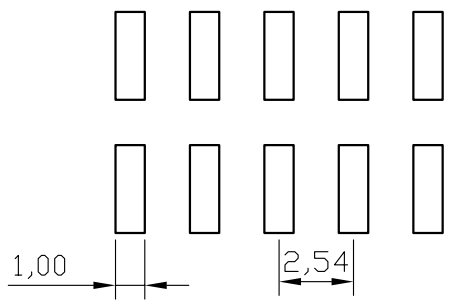

- 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80
- 2- Row Version:
(S)-Single Row
(D)-Double Row
- 3- Pin Style
(N)-90°
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn
- 5- Style:
See Table 1
- 6- Options:
(T)-Tube Packing
(R)-Reel Packing
(C)-Cap+Tube
(Q)-Cap+Reel

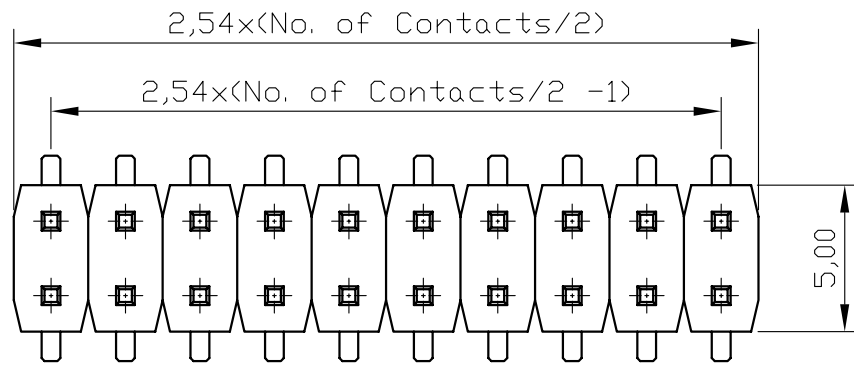

Style	Dimensions				
	A	B	C	D	E
T	6,00	18,00	0,36	6,00	25,00
B	5,90	15,35	0,20	7,50	22,09

		MATRIX Tecnologia Ind. e Com. Ltda.	
UNIT mm	SCALE	TITLE 2,54mm MCT DOUBLE ROW 180° SMD	DATE AUGUST 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO