
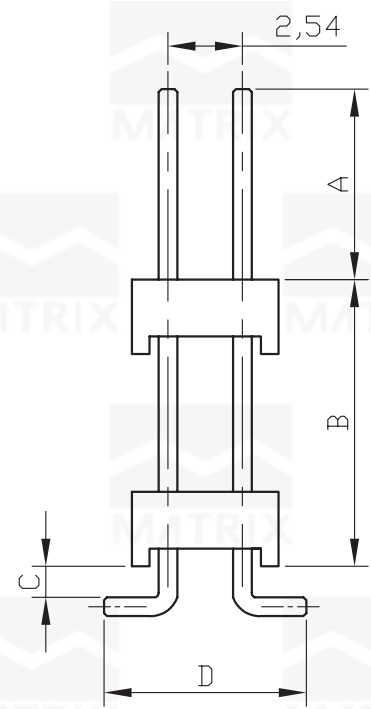


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

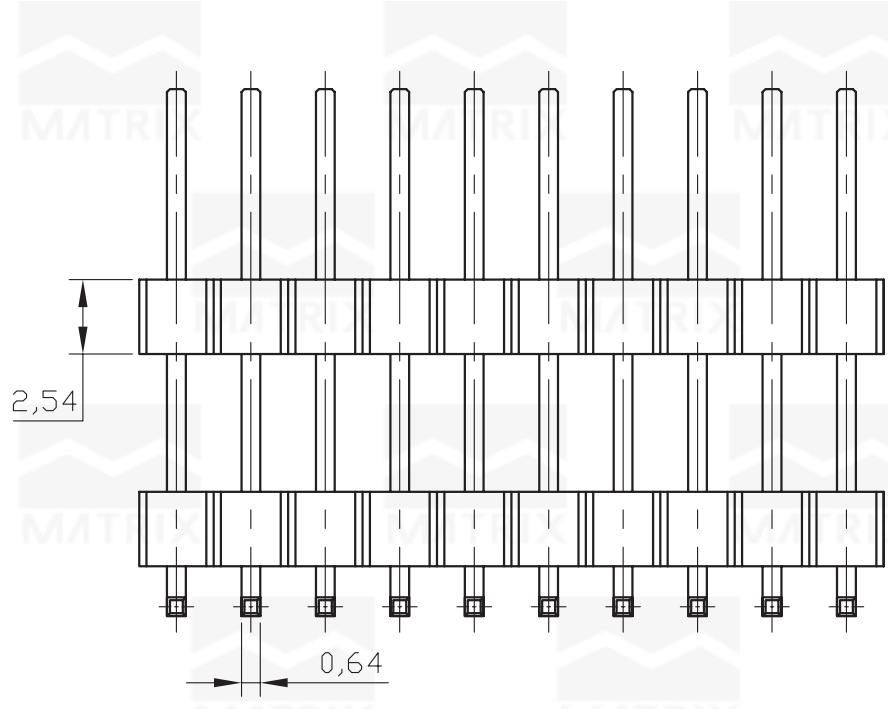


SPECIFICATIONS


Current Rating: 3A
 Operating Temperature: -55°C to 105°C
 Contact Resistance: 20Milliohms Max.
 Insulation Resistance: 100Megaohms Min.
 Withstanding Voltage: AC 100V RMS]

MATERIALS

Housing: Thermoplastic UL 94V-0
 Contact: Copper Alloys

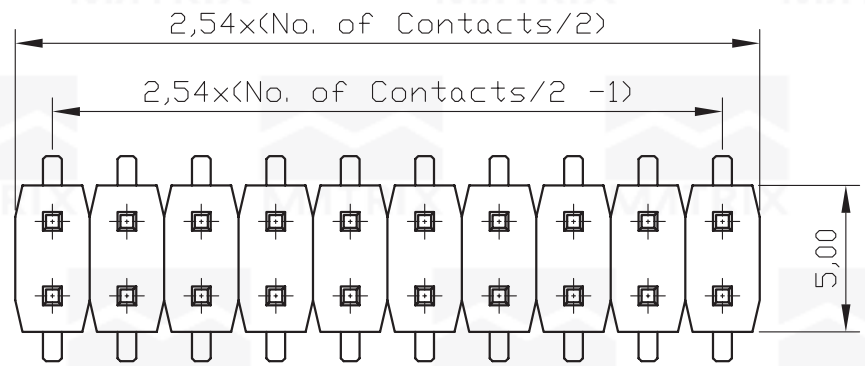

RECOMMENDED P.C.B LAYOUT

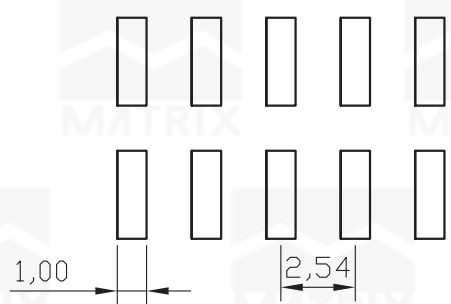

**HOW TO ORDER:
 MCT-[]-[D]-[R]-[]-S-SMD-[]**

- | | |
|--|--|
| 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80 | 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn |
| 2- Row Version:
(S)-Single Row
(D)-Double Row | 5- (R)-RoHS Compliant |
| 3- Pin Style
(N)-90°
(R)-180° | |

		MATRIX Tecnologia Ind. e Com. Ltda.	
TOLERANCE: ±0.25		TITLE	DATE
		2,54mm MCT DOUBLE ROW 180° SMD	
		MATL	APP. BY
		DR. BY	CHK. BY
DWG. NO.		DR. BY DIEGO	