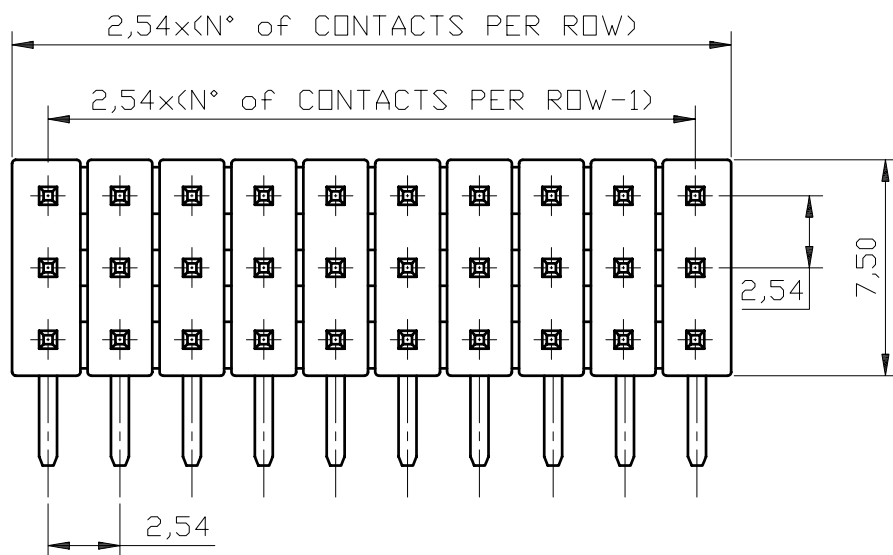
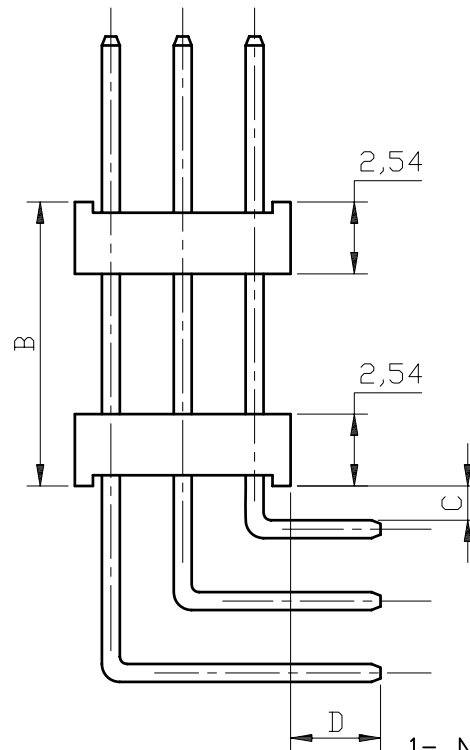
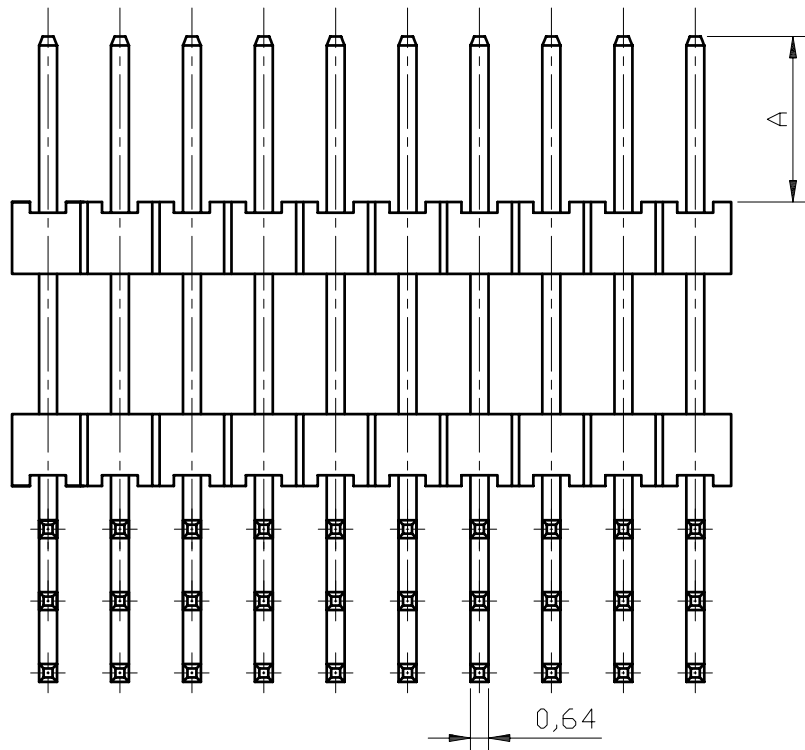





REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		



HOW TO ORDER: MCT[][T][N][]S[][R] 1 2 3 4 5 6

- 1- Nr. of Ways:
Triple Row: 3 to 120
- 2- Row Version:
(T)-Triple Row
- 3- Pin Style:
(R)-180°
(N)-90°
- 4- Terminal Plating:
(E)-Sn
(F)-Flash Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn
- 5- Options:
(T)-Tube Packing
- 6-(R) RoHS Compliant

 MATRIX TECNOLOGIA IND. E COM. LTDA.			
UNIT mm	SCALE	TITLE 2,54mm MCT H=2,54mm TRIPLE ROW 90°	DATE September 2007
TOLERANCE: ±0.25			APP. BY
 		MATL	CHK. BY
DWG. NO.			DR. BY Diego