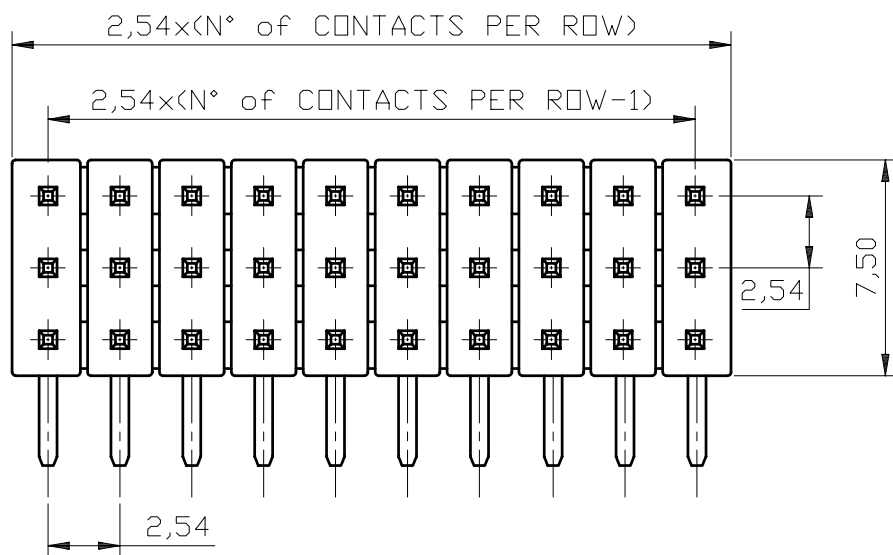
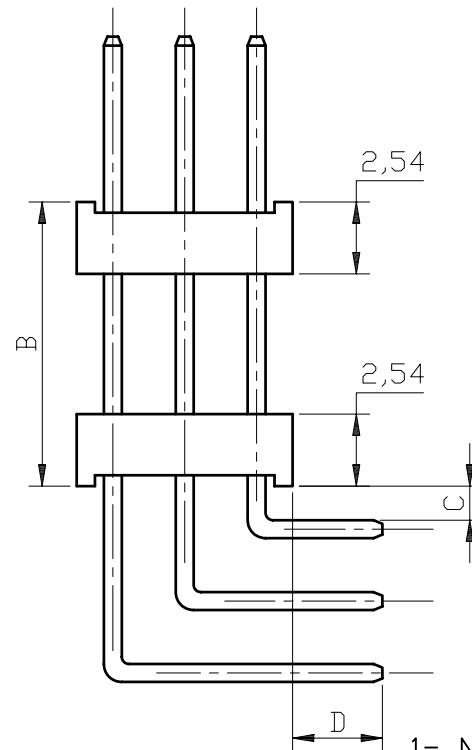
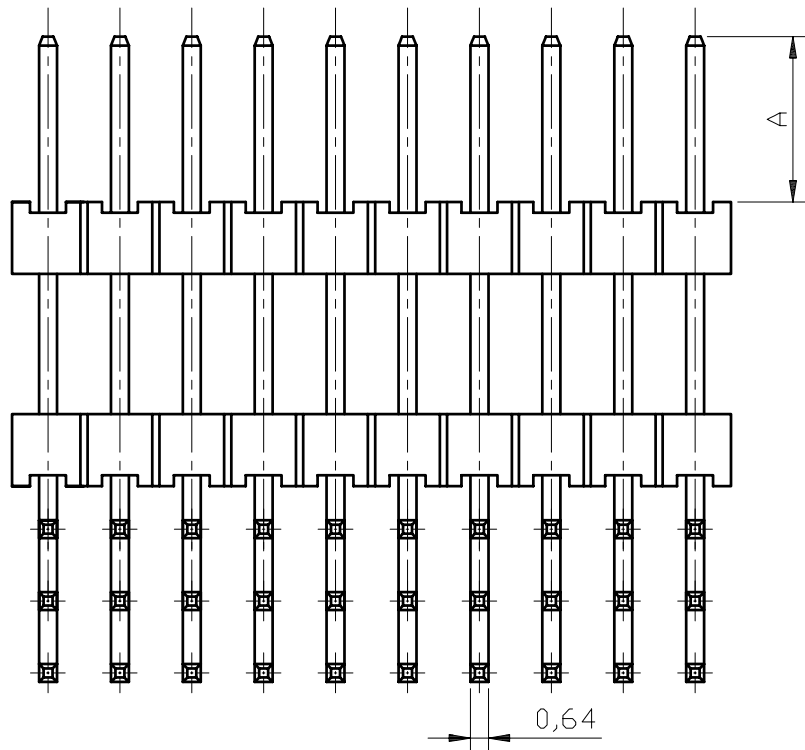





| REV | ECN. NO. | APP | DATE |
|-----|----------------|-----|------|
| A | EDIÇÃO INICIAL | | |
| | | | |
| | | | |



HOW TO ORDER: MCT[][T][N][]S[][R] 1 2 3 4 5 6

- 1- Nr. of Ways:
Triple Row: 3 to 120
- 2- Row Version:
(T)-Triple Row
- 3- Pin Style:
(R)-180°
(N)-90°
- 4- Terminal Plating:
(E)-Sn
(F)-Flash Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn
- 5- Options:
(T)-Tube Packing
(R)-Reel Packing
(C)-Cap+Tube
(Q)-Cap+Reel
- 6-(R) RoHS Compliant

| | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------------------------------------------------|---------------------|
|  | | MATRIX TECNOLOGIA IND. E COM. LTDA. | |
| UNIT mm | SCALE | TITLE 2,54mm MCT H=2,54mm TRIPLE ROW 90° | DATE September 2007 |
| TOLERANCE: ±0.25 | | | APP. BY |
|   | | MATL | CHK. BY |
| | | DWG. NO. | DR. BY Diego |