
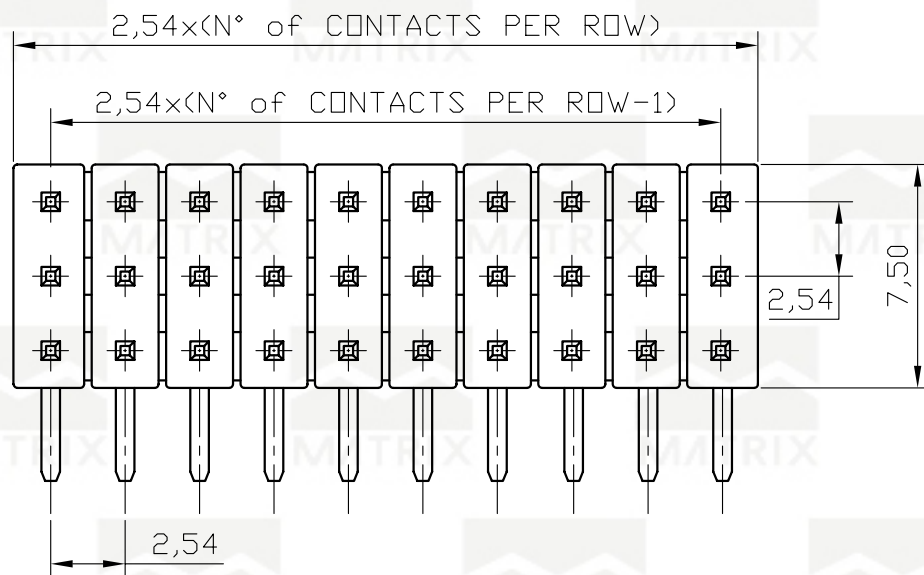
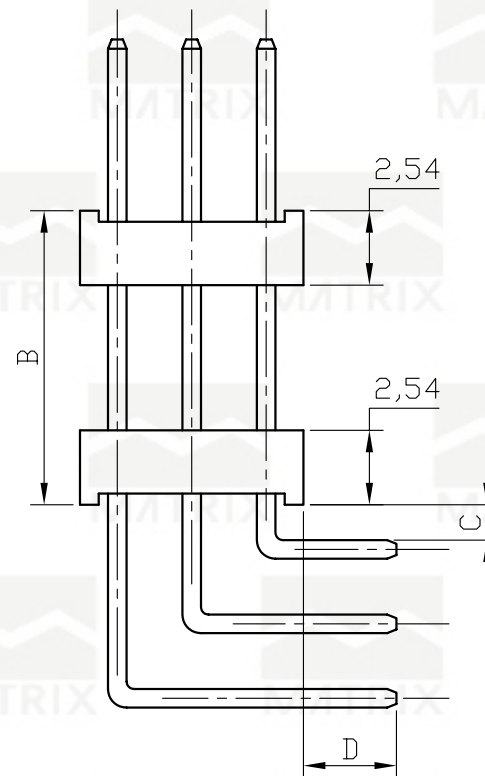


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

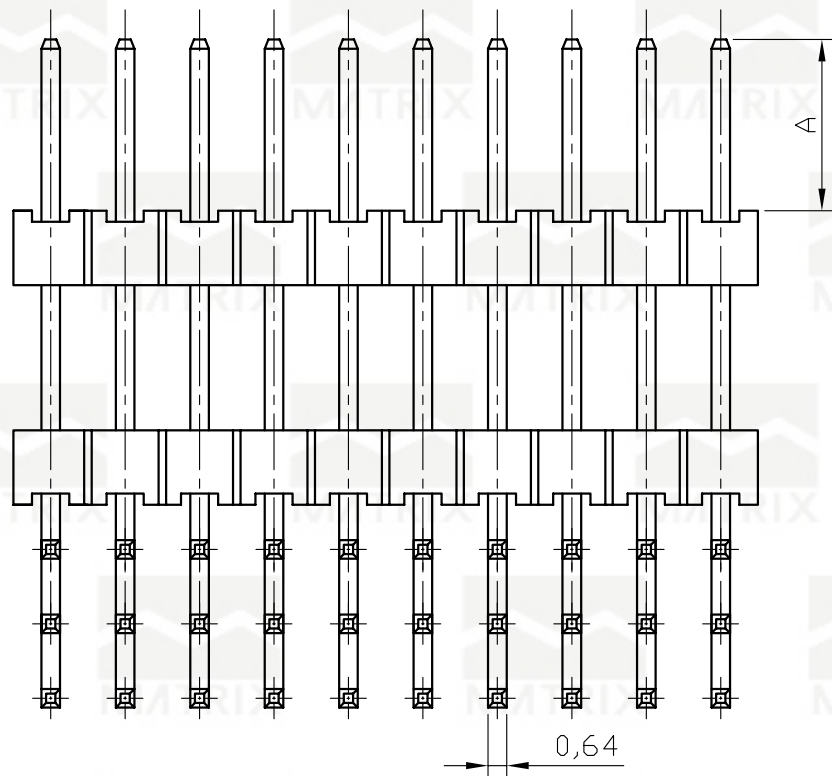

HOW TO ORDER: MCT-[]-[T]-[N]-[]-[S]-[]

1 2 3 4 5

- | | |
|--|--|
| 1- Nr. of Ways
Triple Row: 3 to 120 | 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn |
| 2- Row Version:
(T)-Triple Row | |
| 3- Pin Style
(R)-180°
(N)-90° | 5- (R) RoHS Compliant |



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 4:1	TITLE 2,54mm MCT H=2,54mm TRIPLE ROW 90°	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego