
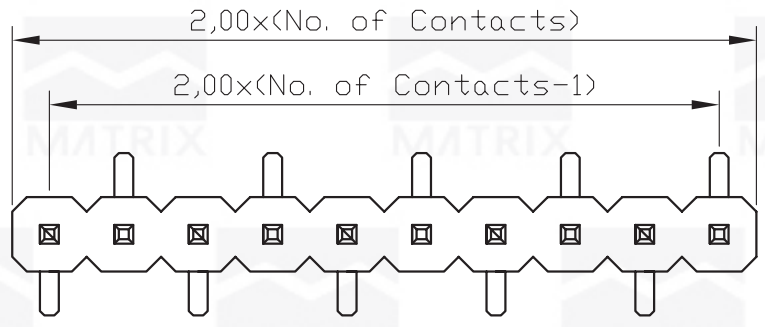



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

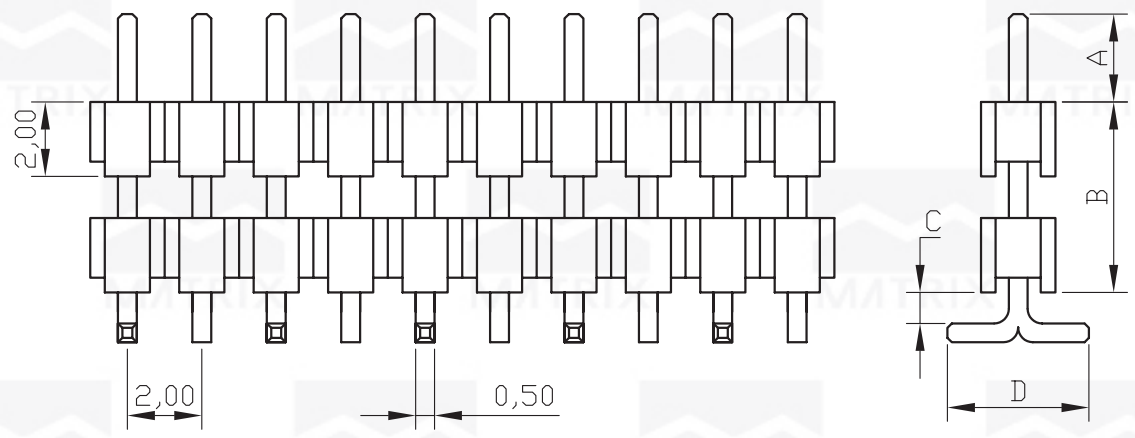

HOW TO ORDER:
MCT-[]-[S]-[R]-[]-[]-2.0-SMD-[]-[]
1 2 3 4 5 6 7


- 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80
- 2- Row Version:
(S)-Single Row
(D)-Double Row
- 3- Pin Style
(N)-90°
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn
- 5- According to Customer Design
- 6- Type
(A)-A Type
(B)-B Type
- 7- (R)-RoHS Compliant

P.C.B. LAYOUT

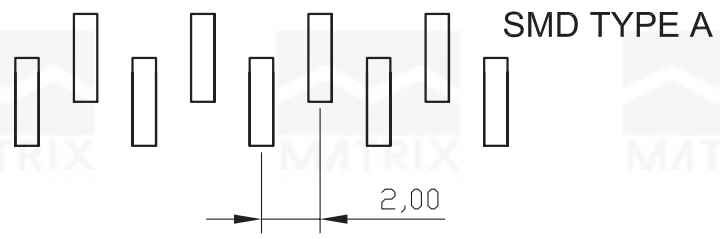



		MATRIX Tecnologia Ind. e Com. Ltda.	
TOLERANCE: ±0.25		TITLE	DATE
		2.0mm MCT SINGLE ROW 180° SMT TYPE	AUGUST 2007
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

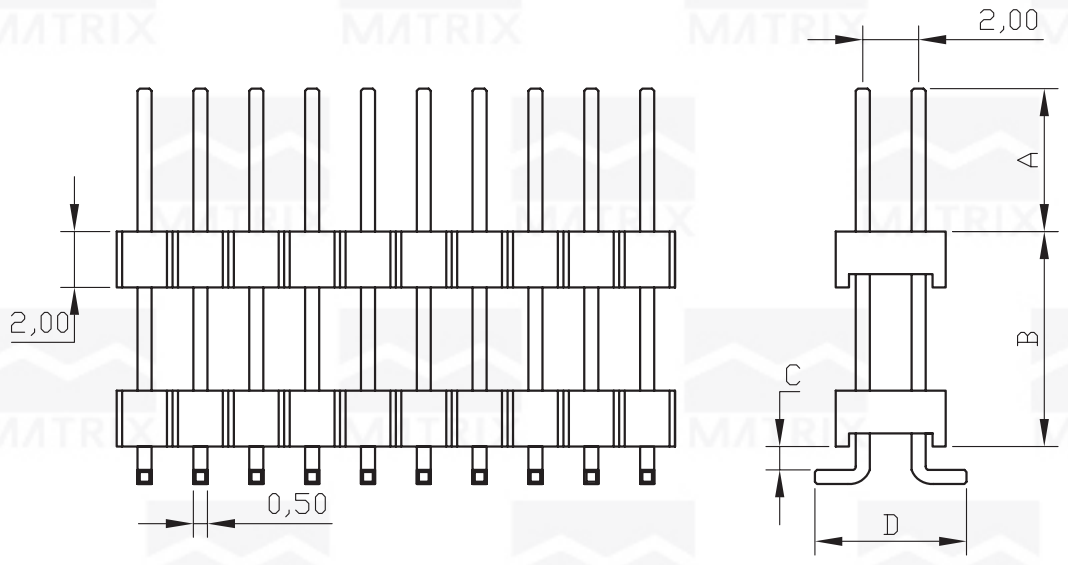



MATERIAL
Housing: Termoplástico UL 94V-0
Contact: Copper Alloys

SPECIFICATIONS
Current: 1Amp
Operating Temperature: -55°C to 105°C
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 5000 Megaohms Min.
Dielectric Strength: 1000VAC Min.
Durability: 100 Cycles
Retention Force: 70g Min.

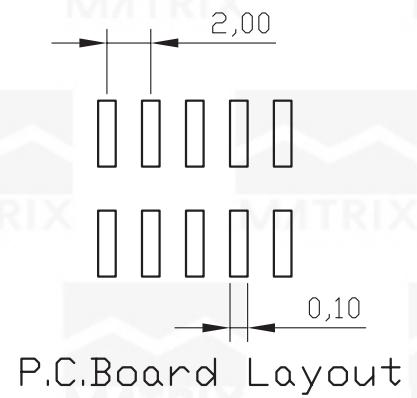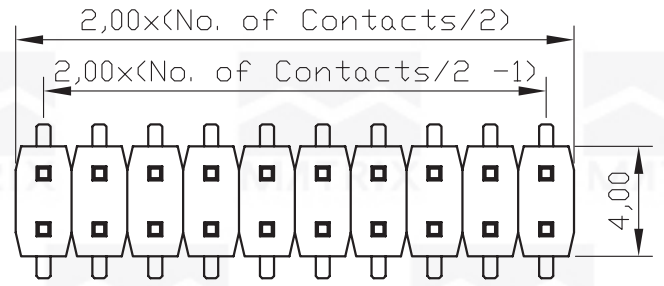

HOW TO ORDER:
MCT-[]-[D]-[R]-[]-[]-2.0-SMD-[]
1 2 3 4 5 6

- 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80
- 2- Row Version:
(S)-Single Row
(D)-Double Row
- 3- Pin Style
(N)-90°
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn
- 5- According to Customer Design
- 6- (R)-RoHS Compliant

 MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE 3:1	TITLE 2.0mm MCT HEIGHT 2.0mm DOUBLE ROW 180° SMT TYPE	DATE August 2007
TOLERANCE: ±0.25		MATL	APP. BY
		DRG. NO.	CHK. BY
			DR. BY DIEGO