


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

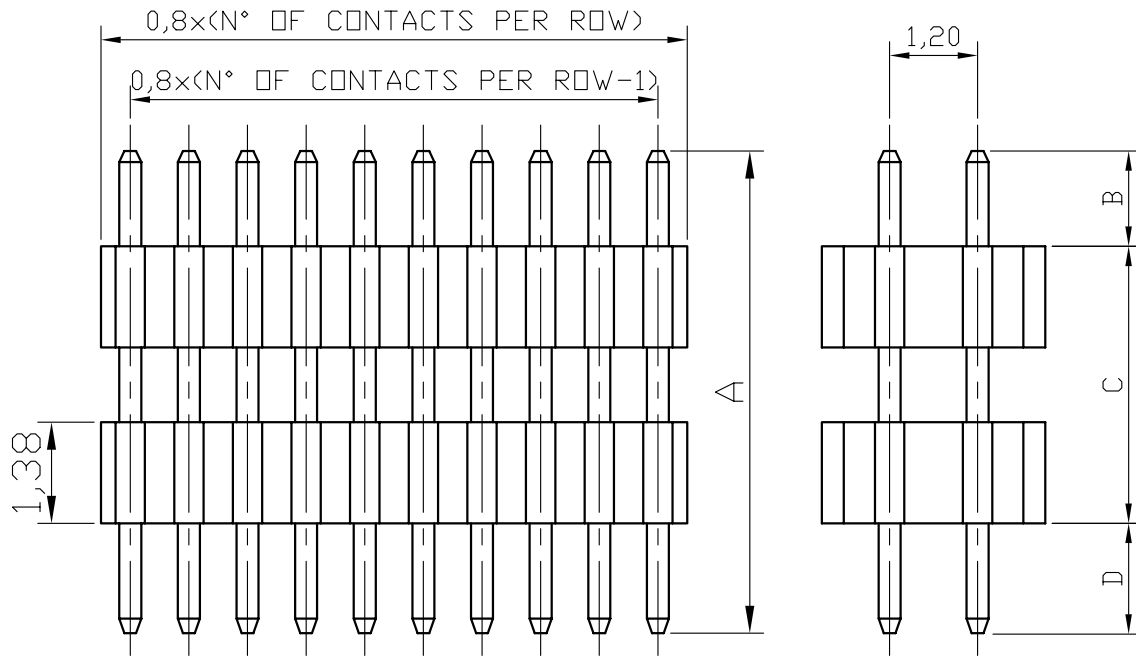

### SPECIFICATIONS

Current Rating: 0,75A

Operating Temp: -40°C to 105°C

Insulator Material: Nylon 6T

Contact Material: Brass


Max. Processing Temp: 260°C for 10 sec.

### HOW TO ORDER: MCT[ ][D][R][ ][ ][A][C][ ][R]

**1 2 3 4 5 6 7 8 9**

- |  |   |
|--|---|
| 1- Nr. of Ways<br>Double Row: 10 to 100  | 5- Accordin to Costumer Design  |
| 2- Row Version:<br>(D)-Double Row  | 6- Pitch:<br>(A)-0,8mm x 1,2mm  |
| 3- Pin Style<br>(N)-90°<br>(R)-180°  | 7- Profile:<br>(C)-1,38mm   |
| 4- Terminal Plating:<br>(E)-Sn<br>(F)-FLASH Au<br>(A)-0,38um Au<br>(B)-0,76um Au<br>(C)-0,38um Au/Sn<br>(D)-0,76um Au/Sn | 8- Options:<br>(T)-Tube Packing<br>(R)-Reel Packing<br>(C)-Cap+Tube<br>(Q)-Cap+Reel<br>(Y)-With Locating Peg (Tube) |
|  | 9- (R)-RoHS Compliant   |

### P.C.Board Layout

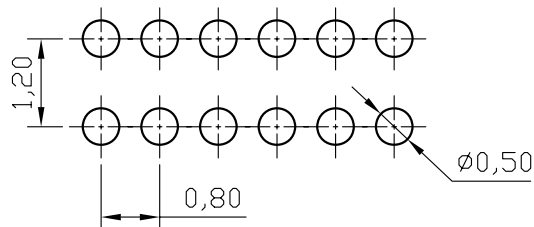

**MATRIX Tecnologia Ind. e Com. Ltda.**

UNIT mm	SCALE 10:1	TITLE 0,8x1,2mm MCT DUAL ROW 180° HEIGHT 1,38mm	DATE August 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego