
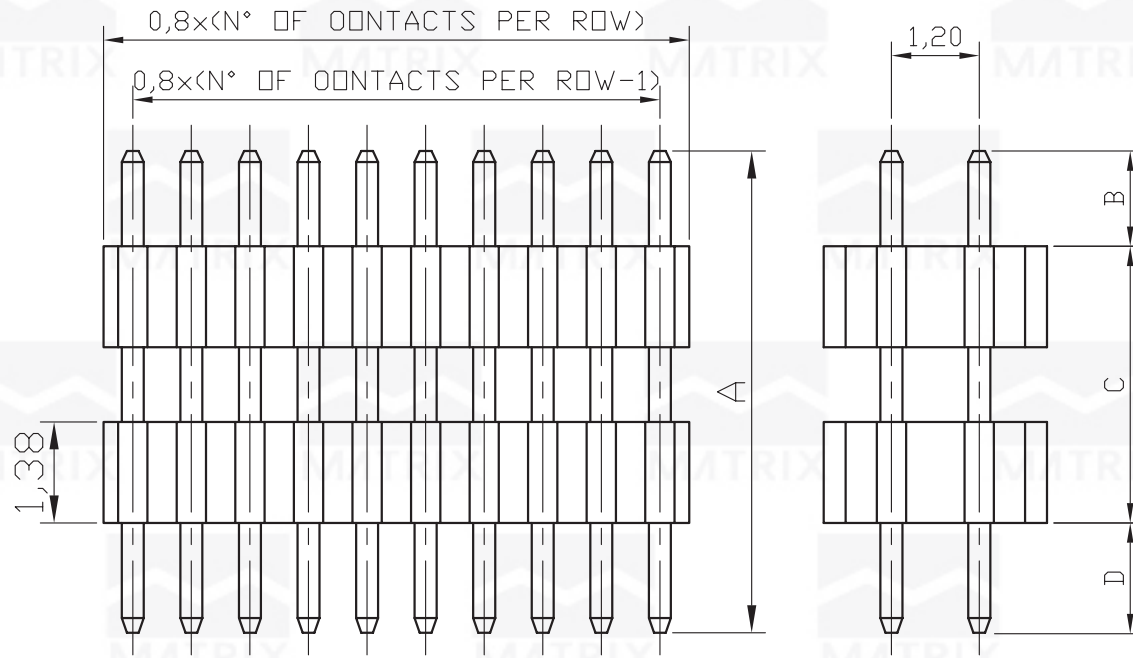


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

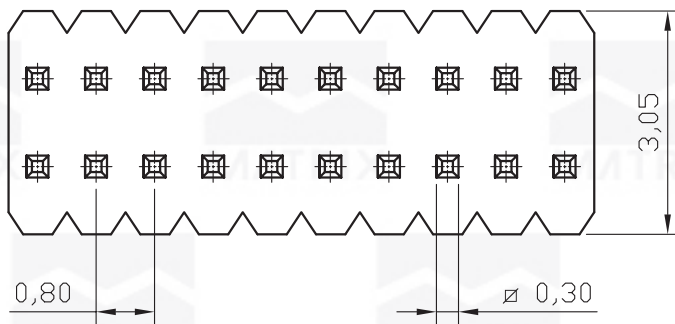


### SPECIFICATIONS

Current Rating: 0,75A  
 Operating Temp: -40°C to 105°C  
 Insulator Material: Nylon 6T  
 Contact Material: Brass  
 Max. Processing Temp: 260°C for 10 sec.





P.C.Board Layout

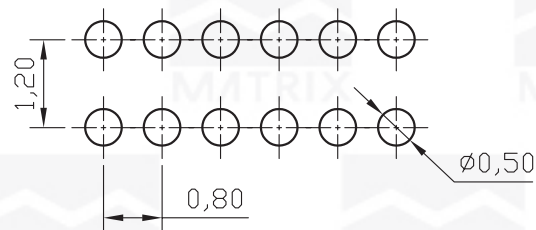

### HOW TO ORDER: MCT-[ ]-[D]-[R]-[ ]-[ ]-0,8x1,2-[ ]

- |   |  |
|---|--|
| 1- Nr. of Ways<br>Double Row: 10 to 100 | 4- Terminal Plating:<br>(E)-Sn<br>(F)-FLASH Au<br>(A)-0,38um Au<br>(B)-0,76um Au<br>(C)-0,38um Au/Sn<br>(D)-0,76um Au/Sn |
| 2- Row Version:<br>(D)-Double Row       | 5- Accordin to Costumer Desing   |
| 3- Pin Style<br>(N)-90°<br>(R)-180°     | 6- (R)-RoHS Compliant  |

 <b>MATRIX Tecnologia Ind. e Com. Ltda.</b>		UNIT	SCALE	TITLE	DATE
mm	10:1	0,8x1,2mm MCT DUAL ROW	August 2007		
TOLERANCE: ±0.25		180° HEIGHT 1,38mm	APP. BY		
		MATL	CHK. BY		
DWG. NO.			DR. BY	Diego	