
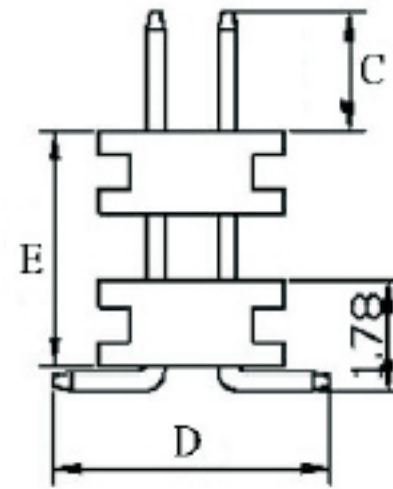



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

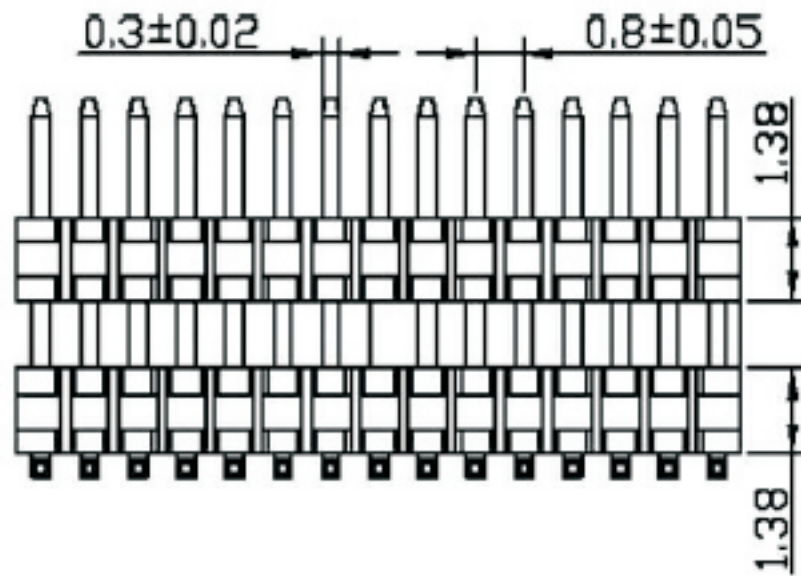


CHARACTERISTICS:
 CURRENT RATING : .75A @80°C AMBIENT
 VOLTAGE RATING : 250V AC,DC
 TEMPERATURE RATING : -65°C ~ +125°C
CONTACT RESISTANCE:
 INITIAL: 20m OHM MAX.
 AFTER ENVIRONMENTAL TEST: 40m OHM MAX.
 AFTER HUMIDITY AND THERMAL SHOCK TEST: 500M OHM MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/MIN
MECHANICAL PERFORMANCE:
 RETENTION FORCE: 300 GRAMS AVERAGE.
MAX PROCESSING TEMP:
 260°C FOR 10 SECONDS

HOW TO ORDER:

MCT[][D][R][][][A]D[C][][R]
1 2 3 4 5 6 7 8 9

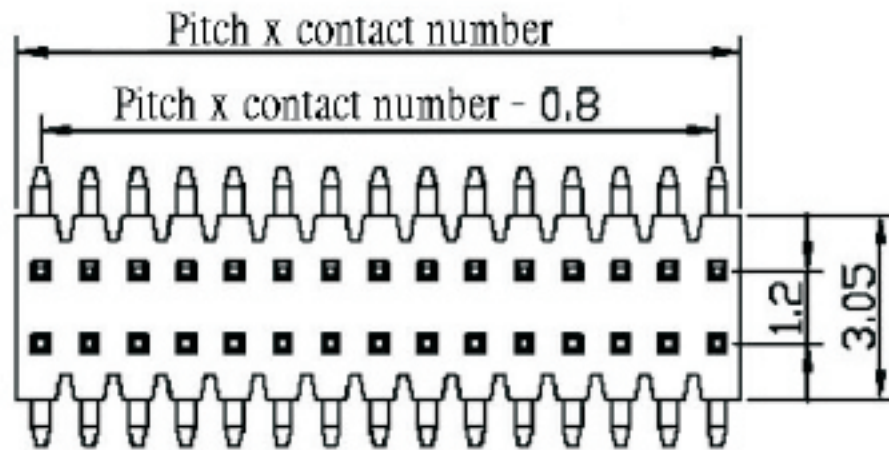

- 1- Nr. of Ways
Double Row: 10 to 100
- 2- Row Version:
(D)-Double Row
- 3- Pin Style
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn
- 5- According to Customer Design
- 6- Pitch:
(A)-0,8x1,2mm
- 7- Profile:
(C)-1,38mm
- 8- Options:
(T)-Tube Packing
(R)-Reel Packing
(C)-Cap+Tube
(Q)-Cap+Reel
(Y)-With Locating Peg (Tube)
- 9- (R)-RoHS Compliant

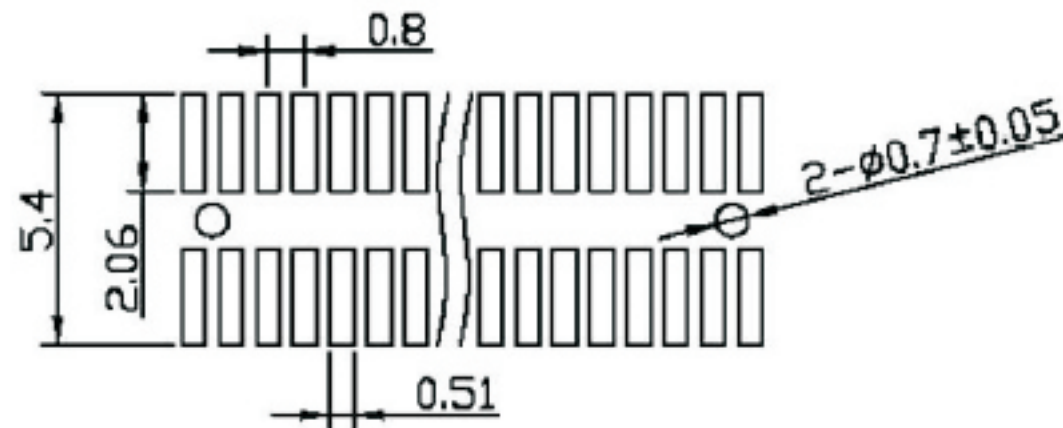

P.C.B LAYOUT

		MATRIX TECNOLOGIA IND. E COM. LTDA.	
UNIT mm	SCALE	TITLE 0,8x1,2mm MCT HEIGHT 1,38mm DOUBLE ROW 180° SMT TYPE	DATE SEPTEMBER 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO