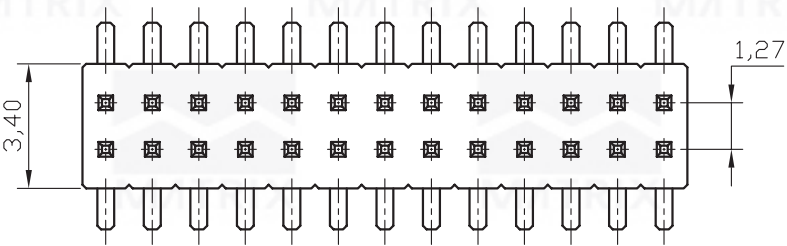
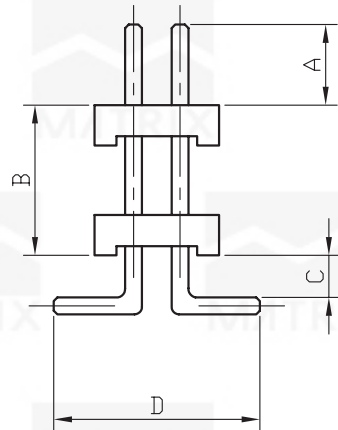
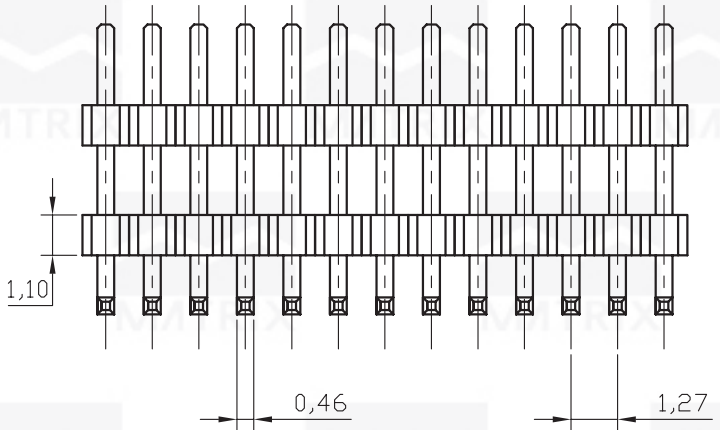




REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		



HOW TO ORDER:
MCT-[]-[D]-[R]-[]-[]-SMD-1,27-P1,1-[]
1 2 3 4 5 6

- 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80
- 2- Row Version:
(D)-Double Row
- 3- Pin Style
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn
- 5- According to Customer Desing
- 6- (R) RoHS Compliant

 MATRIX TECNOLOGIA IND. E COM. LTDA.			
UNIT mm	SCALE 5:1	TITLE 1,27mm MCT HEIGHT 1,1mm DOUBLE ROW 180° SMT TYPE	DATE OCTOBER 2007
TOLERANCE: ±0.25		MATL	APP. BY
			CHK. BY
		DWG. NO.	