

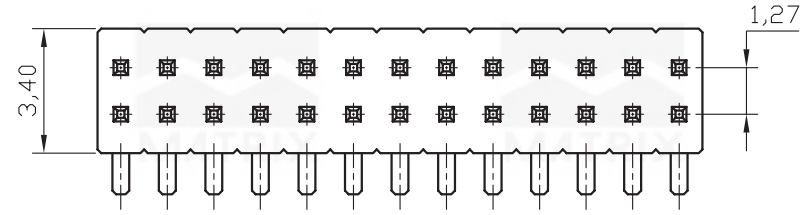


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

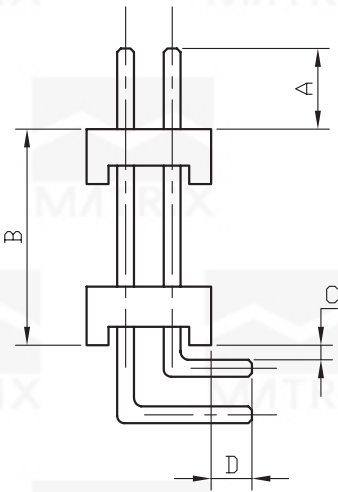

HOW TO ORDER:
MCT-[]-[D]-[N]-[]-[]-1,27-P1,5-[]
1 2 3 4 5 6

- 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80
- 2- Row Version:
(S)-Single Row
(D)-Double Row
- 3- Pin Style
(R)-180°
(N)-90°
- 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn
- 5- Accordig to Costumer Desing
- 6- (R) RoHS Compliant

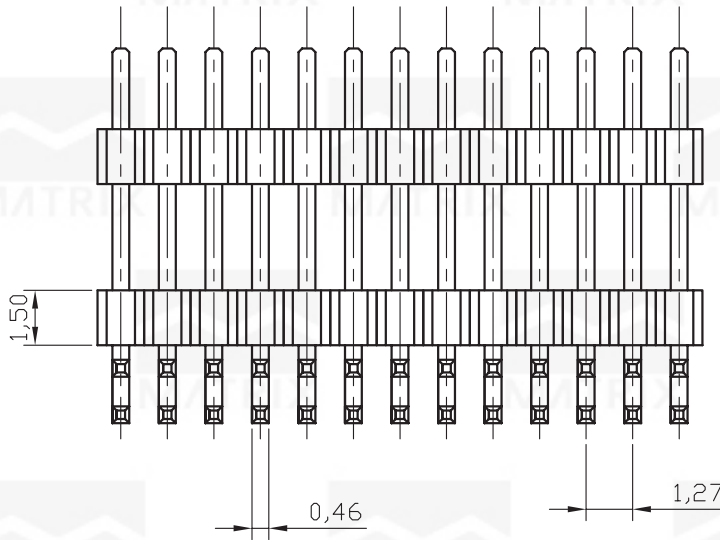

MATRIX TECNOLOGIA IND. E COM. LTDA.

UNIT mm	SCALE 5:1	TITLE 1,27mm MCT HEIGHT 1,5mm 90° DOUBLE ROW	DATE OCTOBER 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO