


| REV | ECN. NO. | APP | DATE |
|-----|----------------|-----|------|
| A | EDIÇÃO INICIAL | | |
| B | NOVO CÓDIGO | | |
| | | | |
| | | | |

**HOW TO ORDER:
PGAA[][][][]R
1 2 3 4**

- 1- Nr. Pins:
121, 132
- 2- Spring Plating
(E)- Sn
(D)- FLASH Au
(F)- 0,38mm Au
(G)- 0,76mm Au
- 3- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38mm Au
(G)-0,76mm Au
- 4- Body Layout:
(A)-14x14 132 Contacts
(E)-13x13 132 Contacts
(K)-13x13 121 Contacts

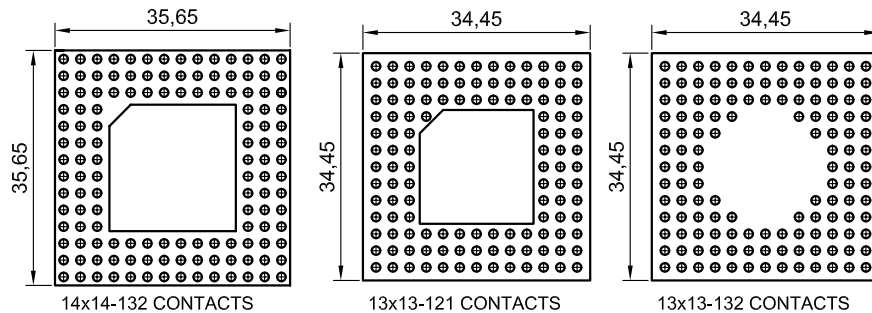

MATRIX TECNOLOGIA IND. E COM. LTDA.

| | | | |
|------------------|--------------|--|----------------------|
| UNIT mm | SCALE 3:1 | TITLE Pin Grid Arrays Adaptor PHT 6 Clip Contact | DATE JANUARY 2010 |
| TOLERANCE: ±0.25 | | | APP. BY |
| | | MATL | CHK. BY |
| | | DWG. NO. | DR. BY FELIPE |