



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

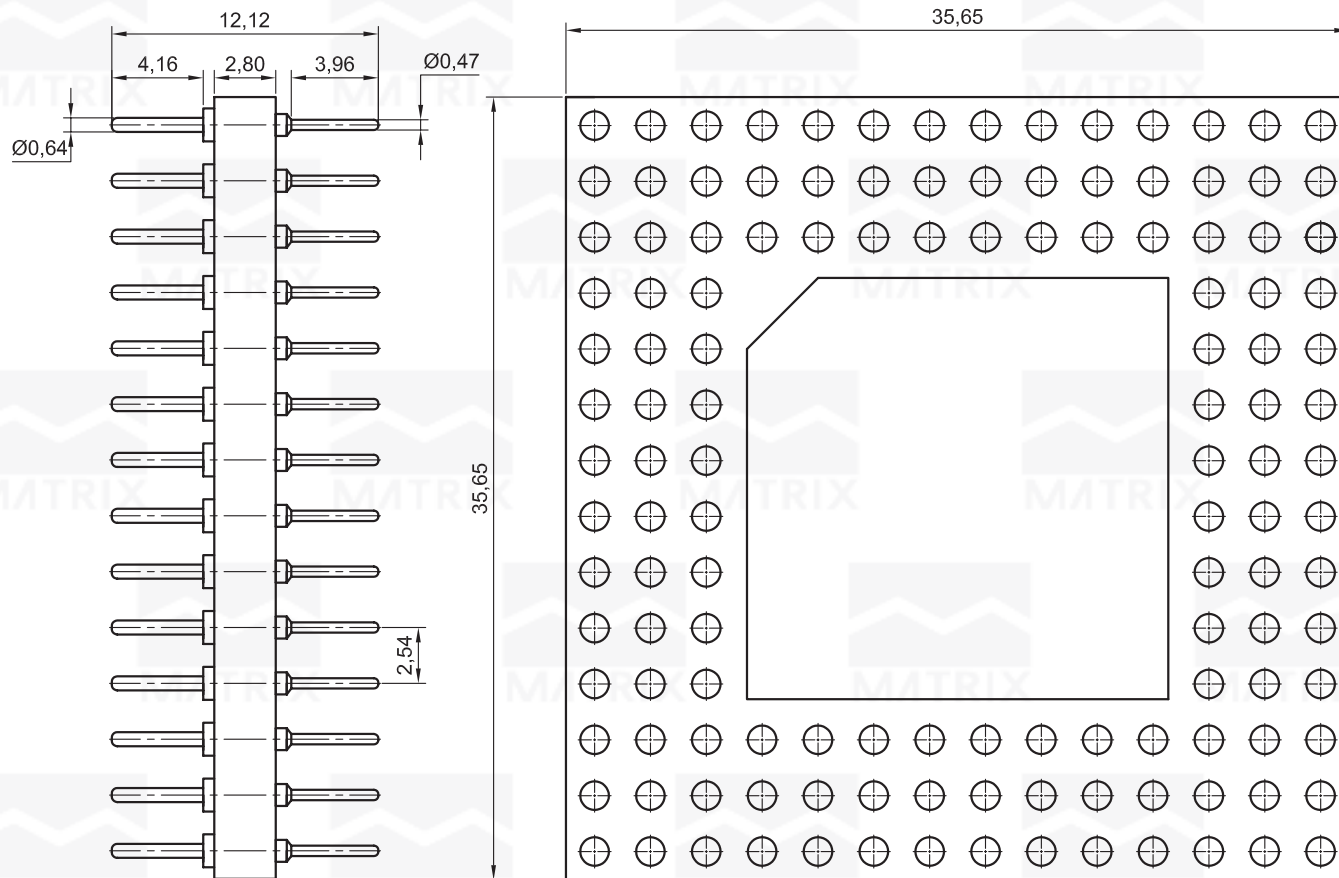

### HOW TO ORDER: PGA-A-[ ]-[ ]-[ ]-[ ]-[ ]

1 2 3 4 5

- 1- Nr. Pins:  
121, 132
- 2- Spring Plating  
(E)- Sn  
(D)- FLASH Au  
(F)- 0,38mm Au  
(G)- 0,76mm Au
- 3- Terminal Plating:  
(E)-Sn  
(D)-FLASH Au  
(F)-0,38mm Au  
(G)-0,76mm Au
- 4- Body Layout:  
(A)-14x14 132 Contacts  
(E)-13x13 132 Contacts  
(K)-13x13 121 Contacts
- 5- (R) RoHS Compliant

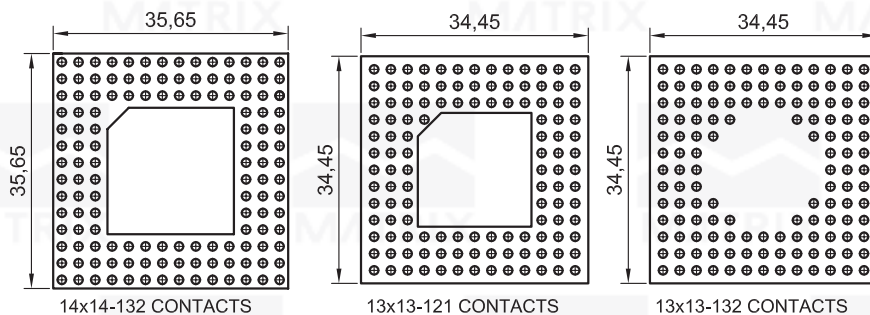

MATRIX TECNOLOGIA IND. E COM. LTDA.

UNIT mm	SCALE 3:1	TITLE Pin Grid Arrays Adaptor PHT 6 Clip Contact	DATE SEPTEMBER 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO