
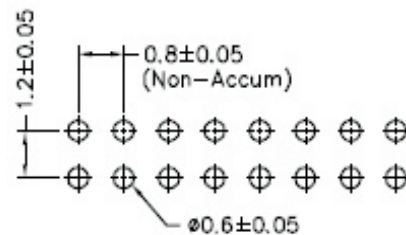
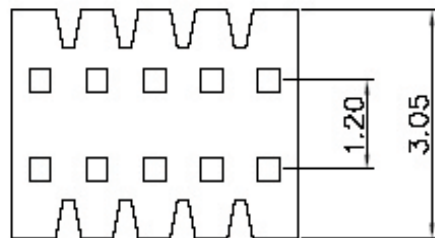


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

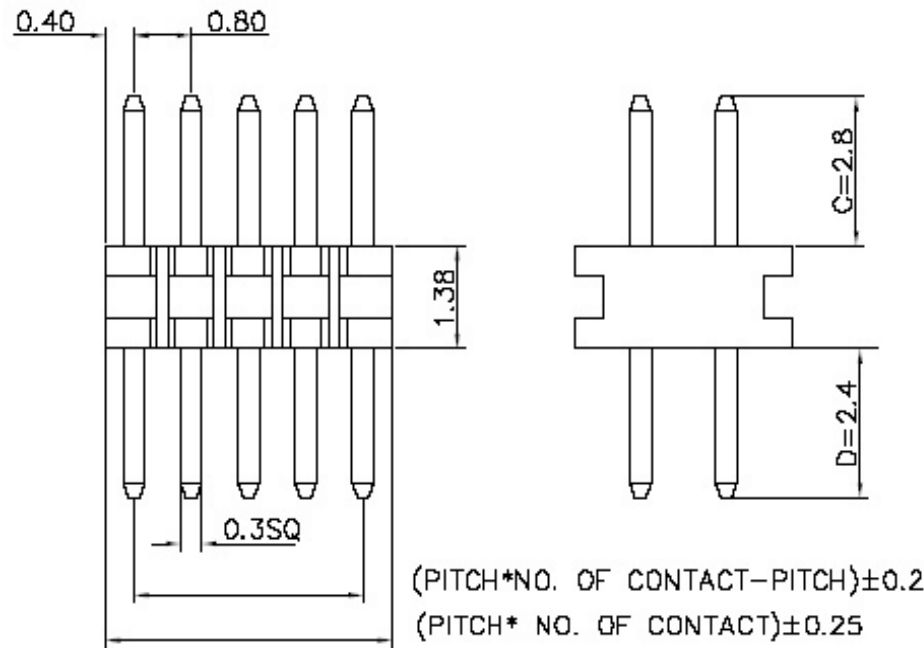



P.C.B. LAYOUT

### SPECIFICATIONS

Current Rating: 1Amps  
 Insulator Resistance: 5000 Megohms min.  
 Dielectric Withstanding: AC 500V  
 Contact Material: Phosphor Bronze  
 Operating Temperature: -40° to +105° C  
 Max Procddsing Temp: 230 for 30~60 seconds  
 (260 for 10 seconds)

### HOW TO ORDER: PIN[ ][D][R][ ]S[A][E][ ][R] 1 2 3 4 5 6 7 8

- |  |                                 |
|--|---------------------------------|
| 1- Nr. of Ways<br>Double Row: 10 to 100  | 5- Pitch:<br>(A)-0,8x1,2mm      |
| 2- Row Version:<br>(D)-Double Row  | 6- Profile:<br>(E)-1,38mm       |
| 3- Pin Style<br>(N)-90°<br>(R)-180°  | 7- Options:<br>(T)-Tube Packing |
| 4- Terminal Plating:<br>(E)-Sn<br>(F)-FLASH Au<br>(A)-0,38um Au<br>(B)-0,76um Au<br>(C)-0,38um Au/Sn<br>(D)-0,76um Au/Sn | 8- (R) RoHS Compliant           |

 <b>MATRIX Tecnologia Ind. e Com. Ltda.</b>			
UNIT mm	SCALE	TITLE	DATE September 2007
TOLERANCE: ±0.25		0,8x1,2mm PIN HEADER 180° DUAL ROW	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego