


REV/	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

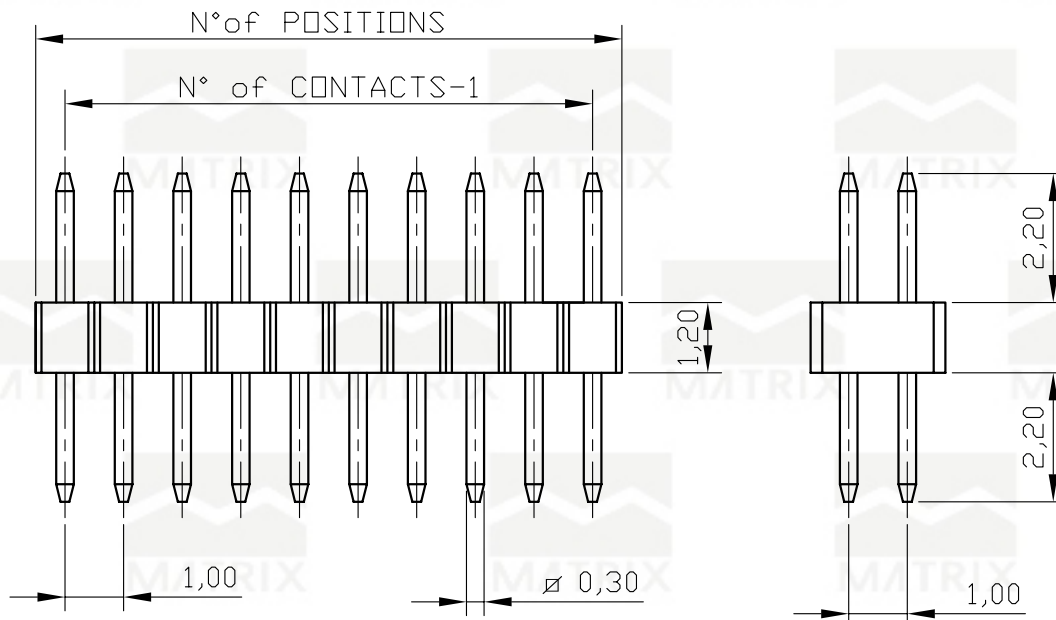

SPECIFICATIONS

Current rating: 1 Amp
 Insulation Resistance: 500MΩ Max.
 Dielectric Withstanding: 600VAC
 Contact Resistance: 20mΩ Max.
 Operating emperature: -40°C to +105°C
 Max Process Temp: 230°C for 30~60 sec.
 (260°C for 10 seconds).



Materials

Contact Material: Phosphor Bronze.
 Insulator Material: Polyester, UL94V-0,
 Nylon 6T.

**HOW TO ORDER:
 PIN-[]-[D]-[R]-[]-[S]-1,0-P1,2-[]**

1 2 3 4 5

- 1- Nr. of Ways
Double Row: 2 to 80
- 2- Row Version:
(D)-Double Row
- 3- Pin Style
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn
- 5- (R) RoHS Compliant

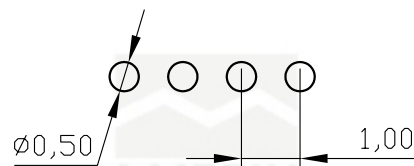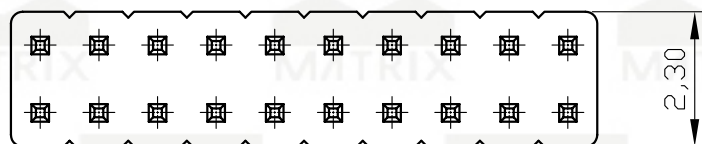

RECOMMENDED
P.C.BOARD LAYOUT



MATRIX Tecnologia Ind. e Com. Ltda.

0.0±	SCALE	TITLE 1,0mm PIN HEADER HEIGHT 1,2mm DUAL ROW 180°	DATE JUNE 2007
0.00±			APP. BY
0.000±			UNIT mm
	MATL	CHK. BY	
	DWG. NO.	DR. BY DIEGO	