



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

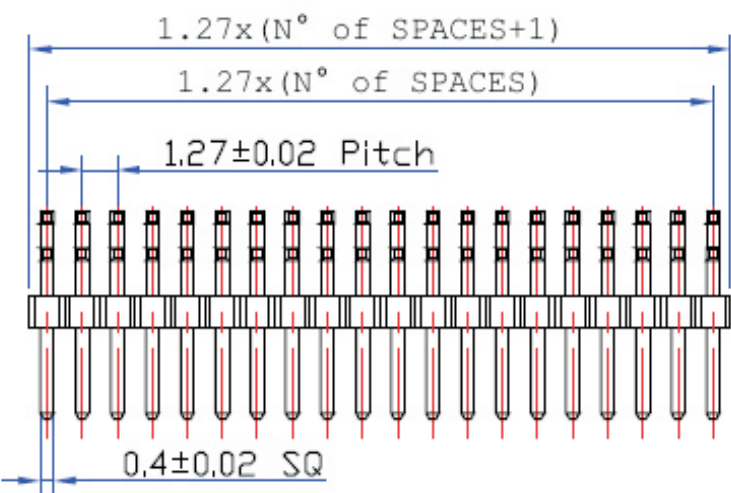


1.1±0.15

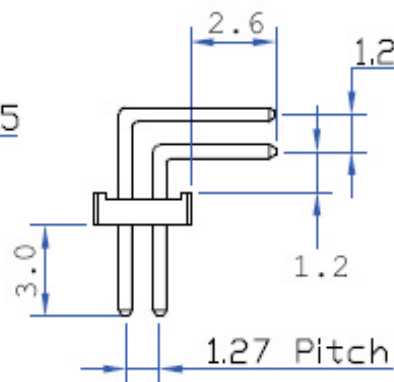


**SPECIFICATIONS**

Current Rating: 1 Amps  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40°C to +105°C  
 Max Processing Temp.: 230° for 30-60 seconds  
 (260° for 10 seconds)

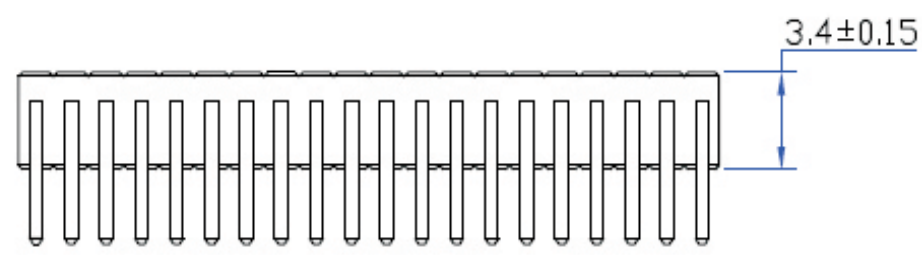

**HOW TO ORDER:**  
 PIN[ ][D][N][ ]S[E][B][ ][R]  
 1 2 3 4 5 6 7 8

- 1-Nr. of Ways: Double Row: 2 to 100
- 2-Row Version: (D)-Double Row
- 3-Pin Style: (N)-90° (R)-180°
- 4-Terminal Plating: (E)-Sn (D)-FLASH Au (F)-0,38um Au (G)-0,76um Au (C)-0,38um Au/Sn (H)-0,76um Au/Sn
- 5-Pitch: (E)-1,27mmx1,27mm
- 6-Profile: (B)-1,1mm
- 7-Options: (T)-Tube Packing
- 8-(R) RoHS Compliant

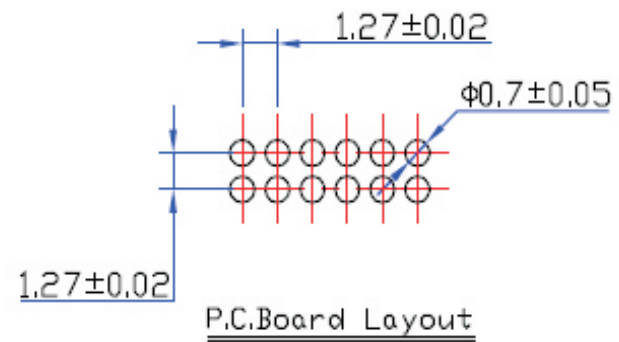

		<b>MATRIX Tecnologia Ind. e Com. Ltda.</b>		
				UNIT mm
TOLERANCE: ±0.25		1,27mm PIN HEADER HEIGHT 1,1mm 90° DOUBLE ROW		APP. BY
	MATL	CHK. BY		
	DWG. NO.	DR. BY Diego		