


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

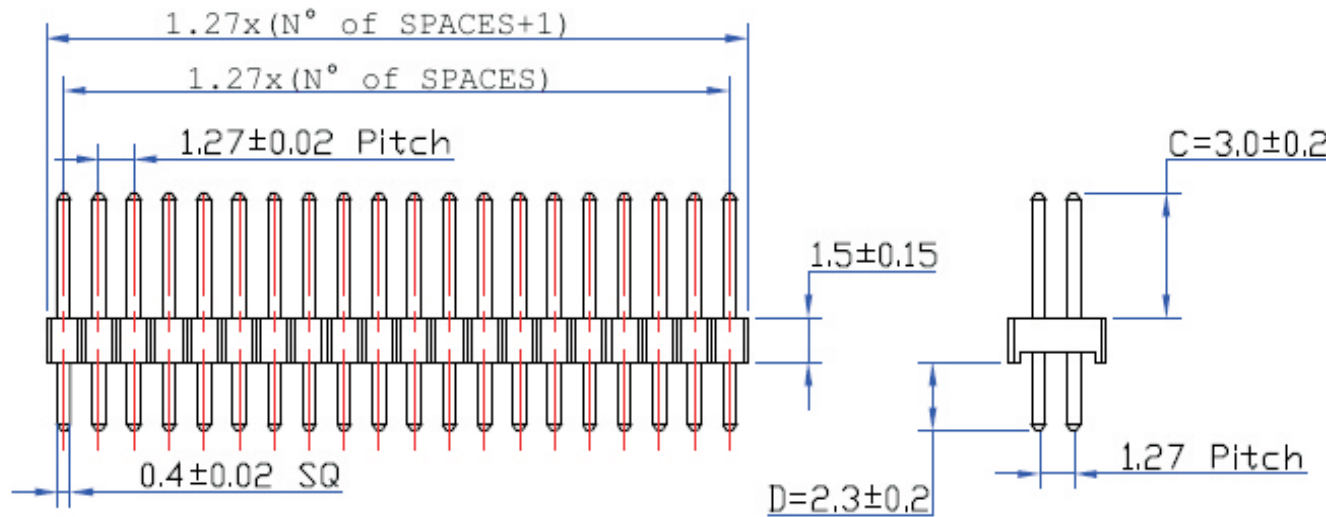


### SPECIFICATIONS



Current Rating: 1 Amps  
 Dielectric Withstanding: AC 500V  
 Operating Temperature:  $-40^\circ\text{C}$  to  $+105^\circ\text{C}$   
 Max Processing Temp.:  $230^\circ$  for 30~60 seconds  
 ( $260^\circ$  for 10 seconds)

### HOW TO ORDER: PIN[ ][D][R][ ][S][E][F][ ][R] 1 2 3 4 5 6 7 8



- 1-Nr. of Ways:  
Double Row: 2 to 100
- 2-Row Version:  
(D)-Double Row
- 3-Pin Style:  
(S)- $90^\circ$   
(R)- $180^\circ$
- 4-Terminal Plating:  
(E)-Sn  
(D)-FLASH Au  
(F)- $0.38\mu\text{m}$  Au  
(G)- $0.76\mu\text{m}$  Au  
(C)- $0.38\mu\text{m}$  Au/Sn  
(H)- $0.76\mu\text{m}$  Au/Sn
- 5-Pitch:  
(E)- $1.27\text{mm} \times 1.27\text{mm}$
- 6-Profile:  
(F)- $1.5\text{mm}$
- 7-Options:  
(T)-Tube Packing
- 8-(R) RoHS Compliant

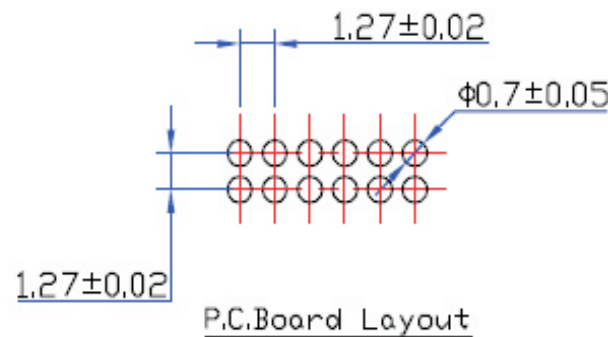

 <b>MATRIX Tecnologia Ind. e Com. Ltda.</b>		UNIT	SCALE	TITLE	DATE
		mm		1,27mm PIN HEADER HEIGHT 1.5mm 180° DOUBLE ROW	September 2007
		TOLERANCE: $\pm 0.25$			APP. BY
		MATL		CHK. BY	
		DWG. NO.		DR. BY Diego	