

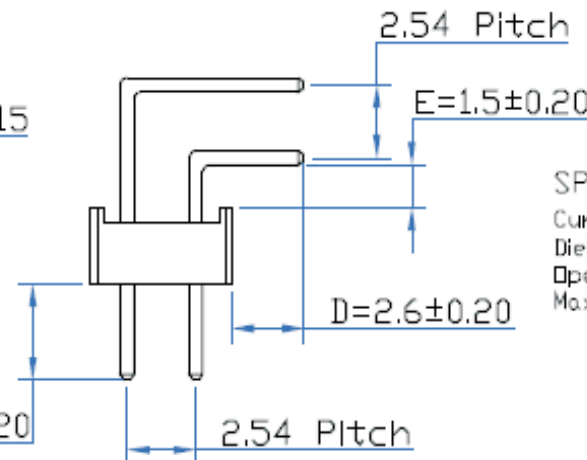
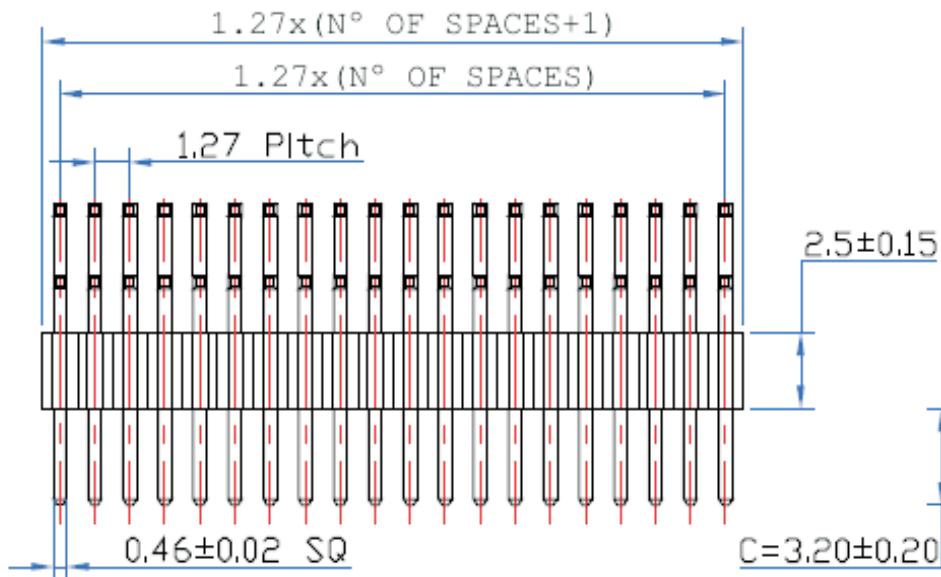


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

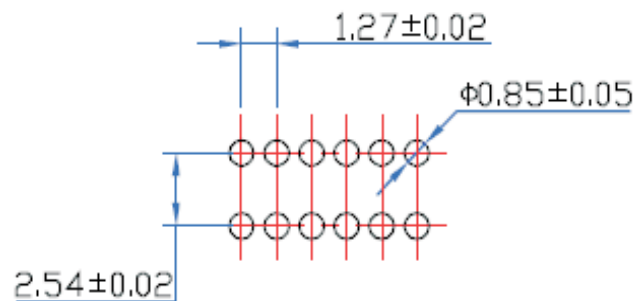

SPECIFICATIONS

Current Rating: 1 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)

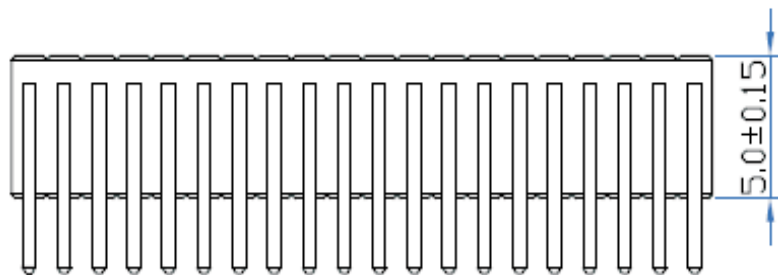

P.C. Board Layout

HOW TO ORDER: PIN[][D][N][]S[F][K][][R] 1 2 3 4 5 6 7 8

- | | |
|---|---------------------------------|
| 1-Nr. of Ways:
Double Row: 02 to 100 | 5-Pitch:
(F)-1,27mm x 2,54mm |
| 2-Row Version:
(D)-Double Row | 6-Profile:
(K)-2,50mm |
| 3-Pin Style:
(N)-90°
(R)-180° | 7-Options:
(T)-Tube Packing |
| 4-Terminal Plating:
(E)-Sn
(D)-Flash Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn | 8-(R) RoHS Compliant |



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE	TITLE 1.27x2.54mm PIN HEADER HEIGHT 2.5mm 90° DUAL ROW	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego