
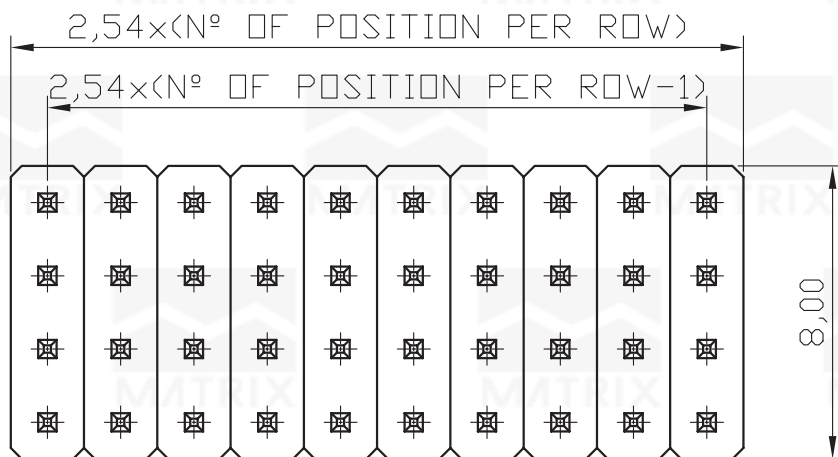


REV	ECN. NO.	APP	DATE
B	MELHORIA NO ASPECTO VISUAL		

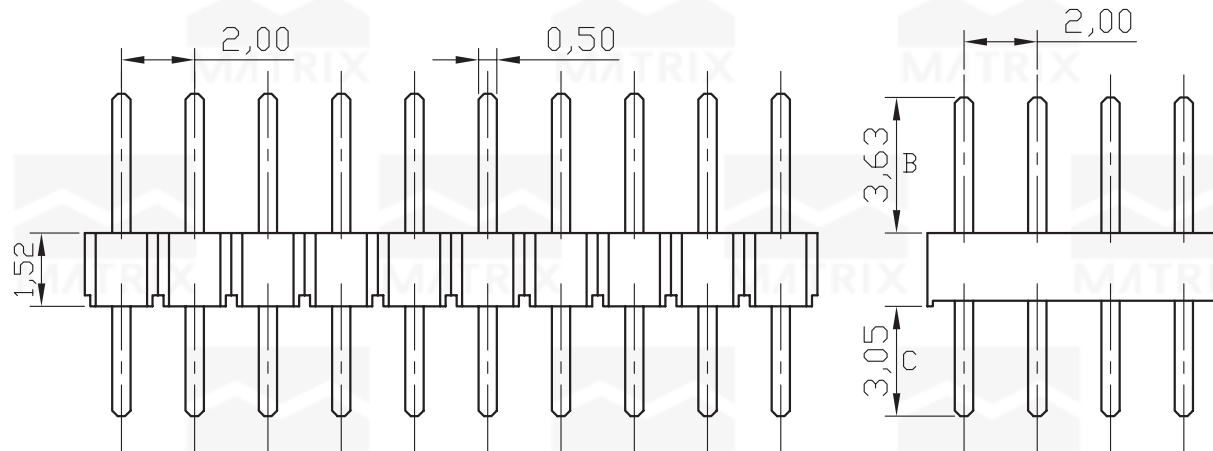

### SPECIFICATIONS

Current Rating: 1Amp  
Insulation Resistance: 5000MΩ Min.  
Dielectric Withstanding: AC 500V  
Operating Temperature: -40°C to 105°C  
Contact Material: Brass or Phosphor bronze  
Insulation Material: Polyester, UL 94V-0

### HOW TO ORDER: PIN-[ ]-[Q]-[S]-[ ]-S-2,0-[ ]

1    2    3    4    5

- |                                       |  |
|---------------------------------------|--|
| 1- Nr. of Ways<br>Four Rows: 2 to 120 | 4- Terminal Plating:<br>(E)-Sn<br>(D)-FLASH Au<br>(F)-0,38um Au<br>(G)-0,76um Au<br>(C)-0,38um Au/Sn<br>(H)-0,76um Au/Sn |
| 2- Row Version:<br>(Q)-Four Rows      | 5-(R) RoHS Compliant   |
| 3- Pin Style<br>(S)-180°              |  |



**MATRIX Tecnologia Ind. e Com. Ltda.**

0.0±	SCALE	TITLE 2,0mm PIN HEADER HEIGHT 1,52mm 180° FOUR ROWS	DATE	JULY 2007
0.00±			APP. BY	
0.000±			UNIT	mm
		MATL	DR. BY DIEGO	
		DWG. NO.		