
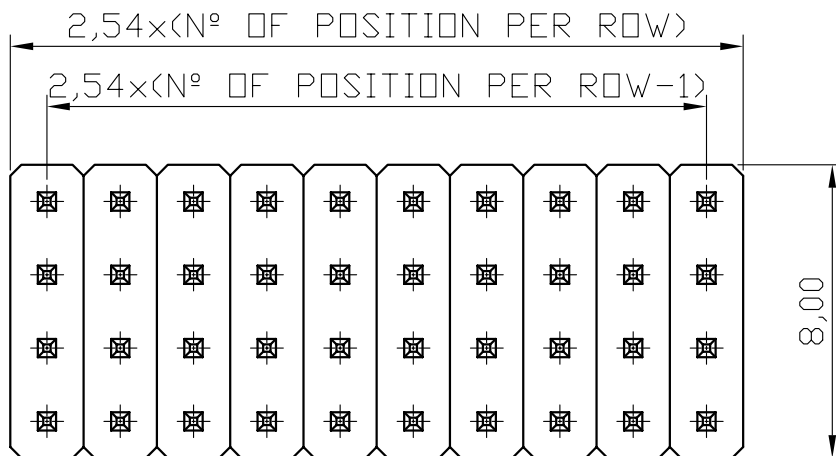


REV	ECN. NO.	APP	DATE
B	MELHORIA NO ASPECTO VISUAL		

SPECIFICATIONS

Current Rating: 1Amp
 Insulation Resistance: 5000MΩ Min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to 105°C
 Contact Material: Brass or Phosphor bronze
 Insulation Material: Polyester, UL 94V-0

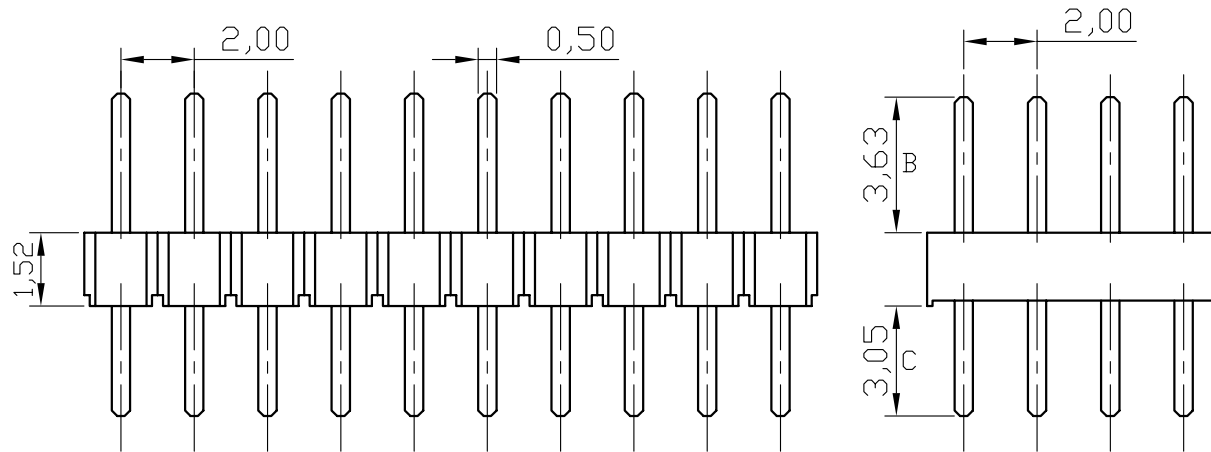

**HOW TO ORDER:
 PIN[][Q][S][]S2[G][R]**

- | | |
|---------------------------------------|--|
| 1- Nr. of Ways
Four Rows: 2 to 120 | 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn |
| 2- Row Version:
(Q)-Four Rows | 5- Profile:
(G)-1,52mm |
| 3- Pin Style
(S)-180° | 6-(R) RoHS Compliant |



MATRIX Tecnologia Ind. e Com. Ltda.

0.0±	SCALE	TITLE	DATE
0.00±	UNIT mm	2,0mm PIN HEADER HEIGHT	JULY 2007
0.000±		1,52mm 180° FOUR ROWS	APP. BY
	MATL		CHK. BY
	DWG. NO.		DR. BY DIEGO