
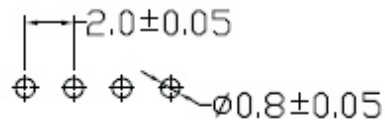


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

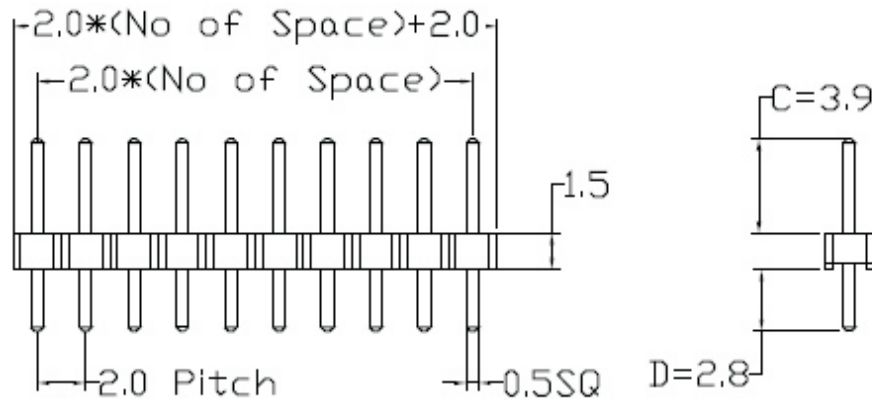

P.C.Board Layout



SPECIFICATIONS

Current Rating: 2 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° for 30-60 seconds
 (260° for 10 seconds)


HOW TO ORDER: PIN-[]-[S]-[S]-[]-S-2,0-P1,5-[]

1 2 3 4 5

- | | |
|--|--|
| 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80 | 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn |
| 2- Row Version:
(S)-Single Row
(D)-Double Row | 5- (R) RoHS Compliant |
| 3- Pin Style
(R)-90°
(S)-180° | |

 MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE	TITLE	DATE September 2007
TOLERANCE: ±0.25		2,00mm PIN HEADER HEIGHT 1,5mm 180° SINGLE ROW	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

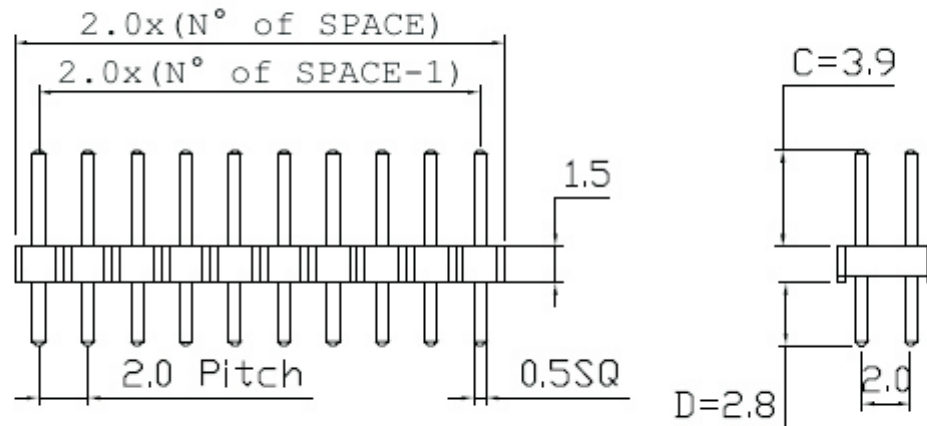

SPECIFICATIONS


Current Rating: 2 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)





HOW TO ORDER: PIN-[]-[D]-[S]-[]-S-2,0-P1,5-[]

1 2 3 4 5

- | | |
|--|--|
| 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80 | 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn |
| 2- Row Version:
(S)-Single Row
(D)-Double Row | 5- (R) RoHS Compliant |
| 3- Pin Style
(R)-90°
(S)-180° | |

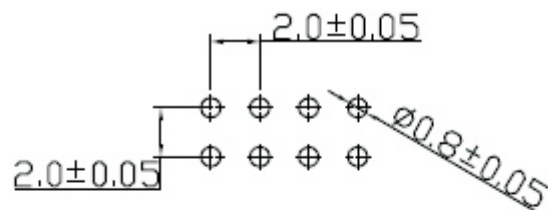

P.C.Board Layout

 MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE	TITLE 2,00mm PIN HEADER HEIGHT 1,5mm 180° DOUBLE ROW	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego