
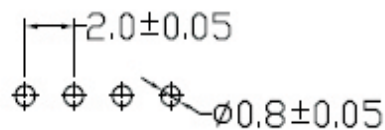


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

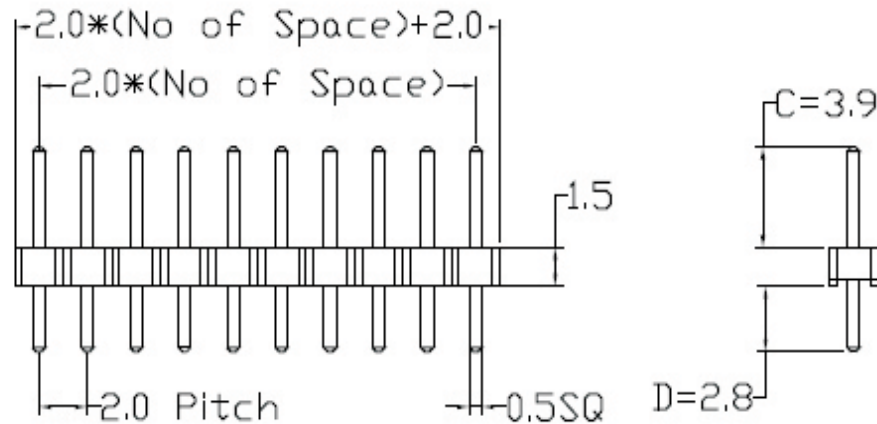



P.C.Board Layout

SPECIFICATIONS




Current Rating: 2 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° for 30-60 seconds
 (260° for 10 seconds)

HOW TO ORDER: PIN[][S][S][]S2[F][][R] 1 2 3 4 5 6 7

- 1- Nr. of Ways
 Single Row: 1 to 40
 Double Row: 2 to 80
- 2- Row Version:
 (S)-Single Row
 (D)-Double Row
- 3- Pin Style
 (R)-90°
 (S)-180°
- 4- Terminal Plating:
 (E)-Sn
 (D)-FLASH Au
 (F)-0,38um Au
 (G)-0,76um Au
 (C)-0,38um Au/Sn
 (H)-0,76um Au/Sn
- 5- Profile:
 (F)-1,50mm
- 6- Options:
 (T)-Tube Packing
- 7- (R) RoHS Compliant

 MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE	TITLE	DATE September 2007
TOLERANCE: ±0.25		2,00mm PIN HEADER HEIGHT 1,5mm 180° SINGLE ROW	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

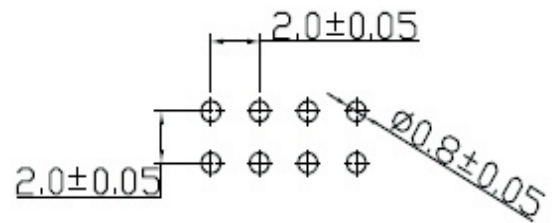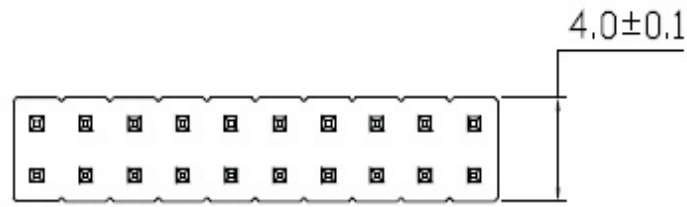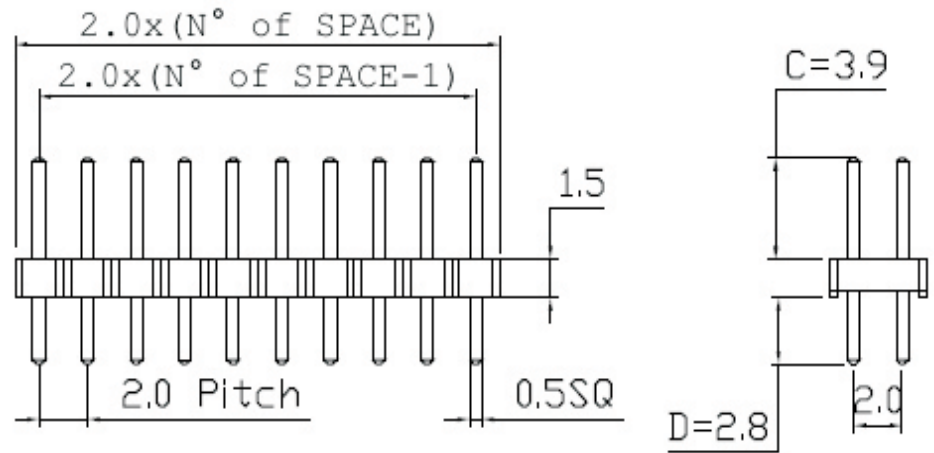

P.C.Board Layout

SPECIFICATIONS

Current Rating: 2 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° for 30-60 seconds
 (260° for 10 seconds)

**HOW TO ORDER:
 PIN[][D][S][]S2[F][][R]
 1 2 3 4 5 6 7**

- 1- Nr. of Ways
 Single Row: 1 to 40
 Double Row: 2 to 80
- 2- Row Version:
 (S)-Single Row
 (D)-Double Row
- 3- Pin Style
 (R)-90°
 (S)-180°
- 4- Terminal Plating:
 (E)-Sn
 (D)-FLASH Au
 (F)-0,38um Au
 (G)-0,76um Au
 (C)-0,38um Au/Sn
 (H)-0,76um Au/Sn
- 5- Profile:
 (F)-2,50mm
- 6- Options:
 (T)-Tube Packing
- 7- (R) RoHS Compliant

		MATRIX Tecnologia Ind. e Com. Ltda.	
UNIT mm	SCALE	TITLE	DATE September 2007
TOLERANCE: ±0.25		2,00mm PIN HEADER HEIGHT 1,5mm 180° DOUBLE ROW	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego