


REV/	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	OPÇÃO 5 ERA "STYLE"		18/11/11

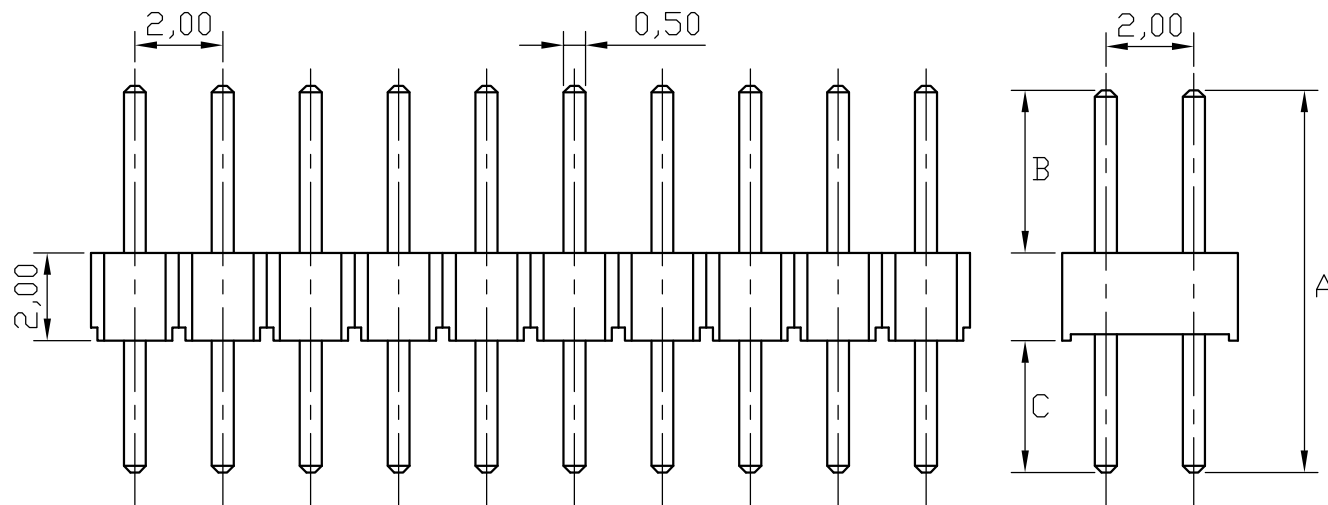


SPECIFICATIONS

Current Rating: 2Amps
 Dielectric Withstanding AC 500V
 Operating Temperature: -40°C to 105°C
 Max Process Temp: 230°C for 30~60 seconds
 (260°C for 10 seconds)

MATERIAL & FINISH

Contact Brass
 Insulator Material: PBT
 Color: Black

STYLE	A	B	C
S	8,70	3,70	3,00
A	8,70	3,90	2,80

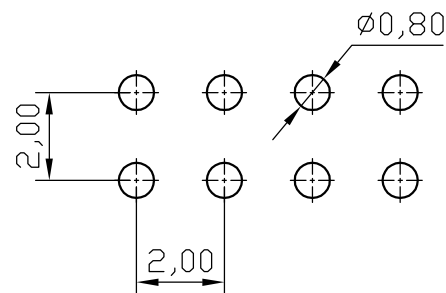

P.C.Board Layout

HOW TO ORDER: PIN[][D][S][][S]2[][R] 1 2 3 4 5 6 7

- 1- Nr. of Ways
 Single Row: 1 to 40
 Double Row: 2 to 80
- 2- Row Version:
 (S)-Single Row
 (D)-Double Row
- 3- Pin Style
 (R)-90°
 (S)-180°
- 4- Terminal Plating:
 (E)-Sn
 (D)-FLASH Au
 (F)-0,38um Au
 (G)-0,76um Au
 (C)-0,38um Au/Sn
 (H)-0,76um Au/Sn
- 5- PIN LENGTH:
 See Table 1
- 6- Options:
 (T)-Tube Packing
 (R)-Reel Packing
 (C)-Cap+Tube
 (Q)-Cap+Reel
- 7- (R) RoHS Compliant



MATRIX Tecnologia Ind. e Com. Ltda.

0.0±	SCALE	TITLE 2,0mm PIN HEADER HEIGHT 2,0mm 180° DOUBLE ROW	DATE	JULY 2011
0.00±			APP. BY	CHK. BY
0.000±				
		MATL	DR. BY Rafael Sczcepanik	
		DWG. NO.		

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	OPÇÃO 5 ERA "STYLE"		18/11/11

SPECIFICATIONS

Current Rating: 2Amps
 Dielectric Withstanding AC 500V
 Operating Temperature: -40°C to 105°C
 Max Process Temp: 230°C for 30~60 seconds
 (260°C for 10 seconds)



MATERIAL & FINISH

Contact Brass
 Insulator Material: PBT
 Color: Black


HOW TO ORDER:

PIN[][S][S][][S]2[][R]
1 2 3 4 5 6 7

- 1- Nr. of Ways
 Single Row: 1 to 40
 Double Row: 2 to 80
- 2- Row Version:
 (S)-Single Row
 (D)-Double Row
- 3- Pin Style
 (R)-90°
 (S)-180°
- 4- Terminal Plating:
 (E)-Sn
 (D)-FLASH Au
 (F)-0,38um Au
 (G)-0,76um Au
 (C)-0,38um Au/Sn
 (H)-0,76um Au/Sn
- 5- PIN LENGTH:
 See Table 1
- 6- Options:
 (T)-Tube Packing
 (R)-Reel Packing
 (C)-Cap+Tube
 (Q)-Cap+Reel
- 7- (R) RoHS Compliant

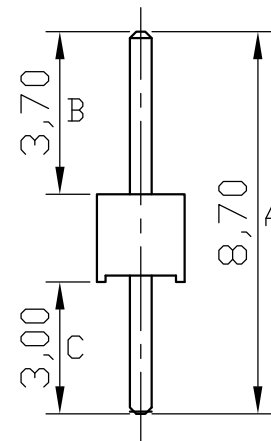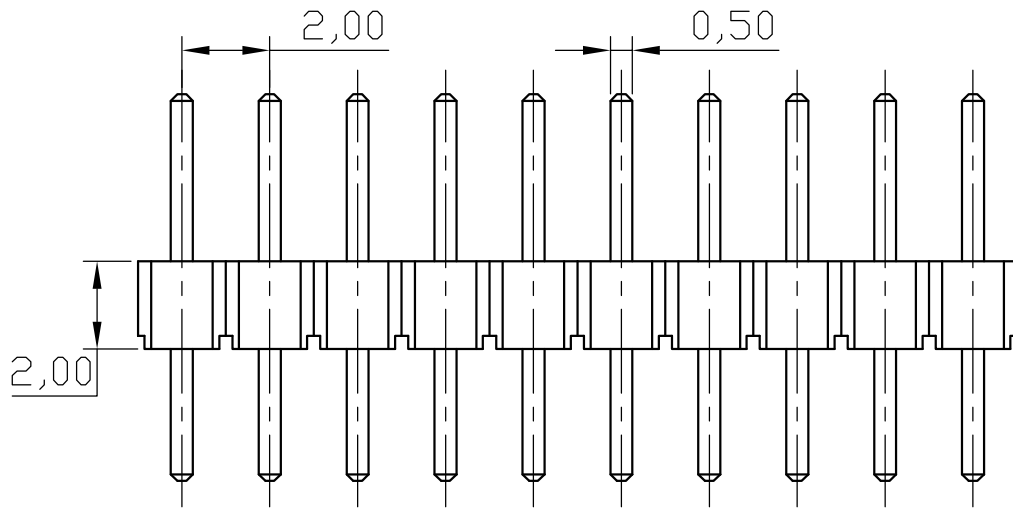

STYLE	A	B	C
S	8,70	3,70	3,00
A	8,70	3,90	2,80

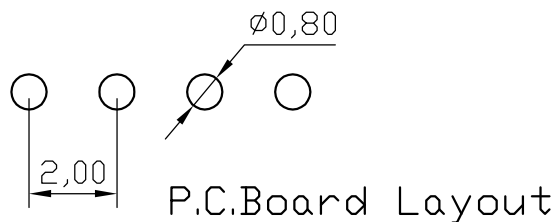

MATRIX Tecnologia Ind. e Com. Ltda.

0.0±	SCALE	TITLE	DATE
0.00±	UNIT mm	2,0mm PIN HEADER HEIGHT	JULY 2011
0.000±		2,0mm 180° SINGLE ROW	APP. BY
	MATL	CHK. BY	
	DWG. NO.	DR. BY Rafael Szczepanik	