


REV/	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

SPECIFICATIONS

Current Rating: 2Amps
 Dielectric Withstanding AC 500V
 Operating Temperature: -40°C to 105°C
 Max Process Temp: 230°C for 30~60 seconds
 (260°C for 10 seconds)


MATERIAL & FINISH

Contact Brass
 Insulator Material: PBT
 Color: Black

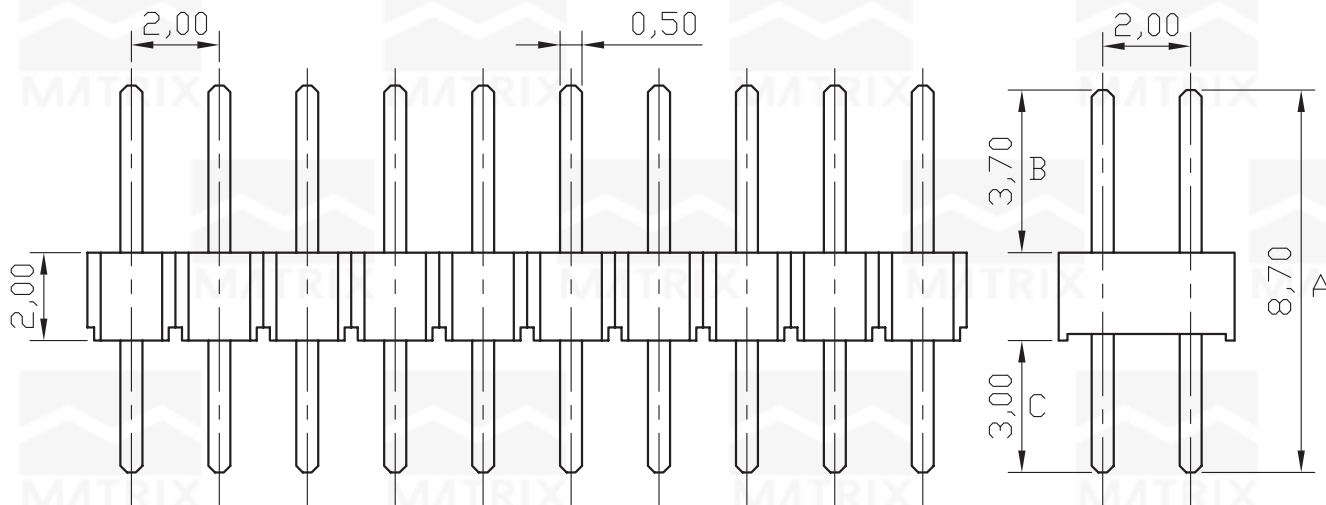



**HOW TO ORDER:
 PIN-[]-[D]-[S]-[]-S-2-[]**

- | | |
|--|--|
| 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80 | 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn |
| 2- Row Version:
(S)-Single Row
(D)-Double Row | 5- (R) RoHS Compliant |
| 3- Pin Style
(R)-90°
(S)-180° | |

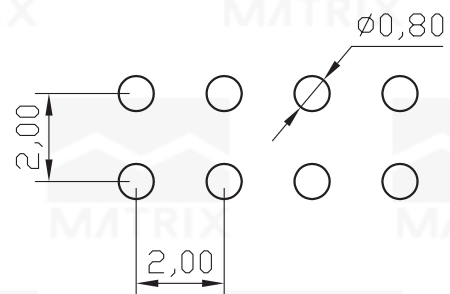

P.C.Board Layout

 MATRIX Tecnologia Ind. e Com. Ltda.			
0.0±	SCALE	TITLE	DATE JUNE 2007
0.00±	UNIT mm	2,0mm PIN HEADER HEIGHT	APP. BY
0.000±		2,0mm 180° DOUBLE ROW	
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO