



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	REV. OPÇÕES DE EMBALAGENS		12/2010

**SPECIFICATIONS**

Current Rating: 2Amps  
 Dielectric Withstanding AC 500V  
 Operating Temperature: -40°C to 105°C  
 Max Process Temp: 230°C for 30~60 seconds  
 (260°C for 10 seconds)


**MATERIAL & FINISH**

Contact Brass  
 Insulator Material: PBT  
 Color: Black

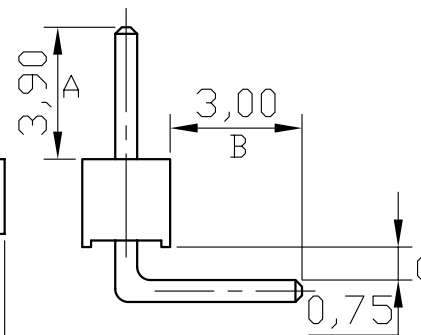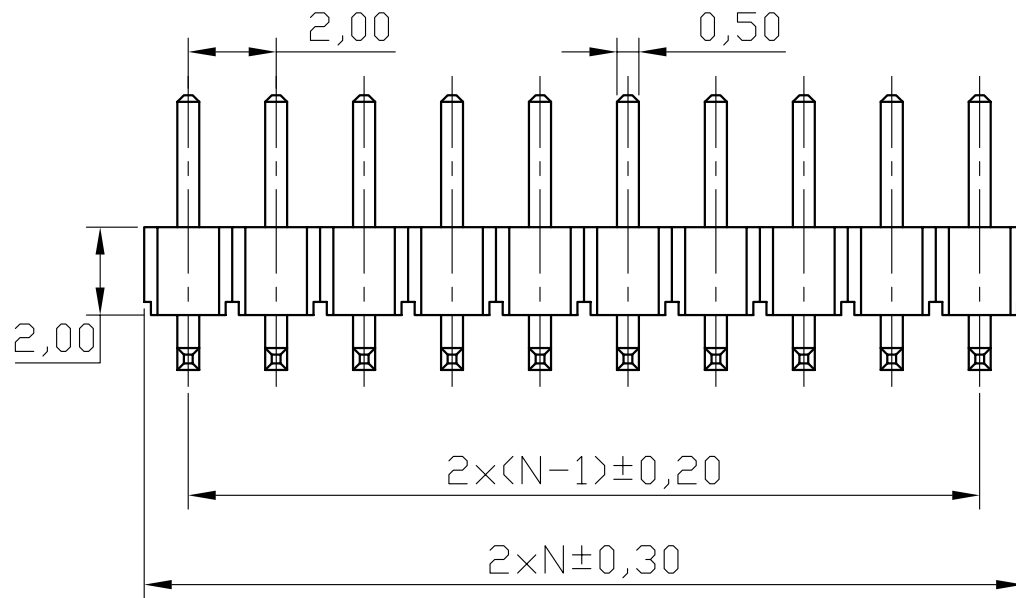




**HOW TO ORDER:**  
**PIN[ ][S][R][ ][S2][I][ ][R]**  
**1 2 3 4 5 6 7**





- 1- Nr. of Ways  
 Single Row: 1 to 40  
 Double Row: 2 to 80
- 2- Row Version:  
 (S)-Single Row  
 (D)-Double Row
- 3- Pin Style  
 (R)-90°  
 (S)-180°
- 4- Terminal Plating:  
 (E)-Sn  
 (D)-FLASH Au  
 (F)-0,38um Au  
 (G)-0,76um Au  
 (C)-0,38um Au/Sn  
 (H)-0,76um Au/Sn
- 5- Profile:  
 (I)-2,0mm
- 6- Options:  
 (T)-Tube Packing
- 7- (R) RoHS Compliant



P.C.Board Layout

 <b>MATRIX Tecnologia Ind. e Com. Ltda.</b>			
0.0±	SCALE	TITLE	DATE JUNE 2007
0.00±	UNIT mm	2,0mm PIN HEADER HEIGHT	APP. BY
0.000±		2,0mm 90° SINGLE ROW	
 	MATL	CHK. BY	DR. BY DIEGO
	DWG. NO.		

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
A	REV. OPÇÕES DE EMBALAGENS		12/2010

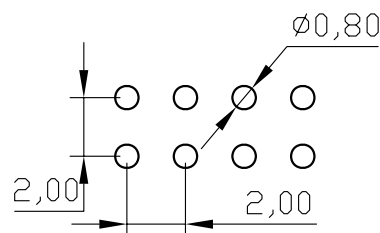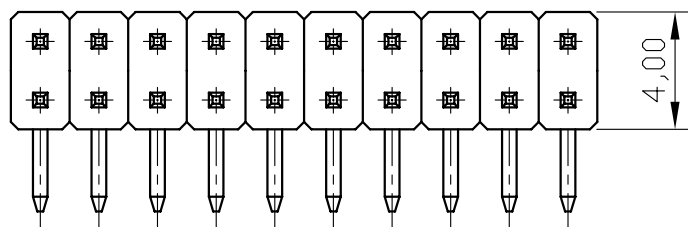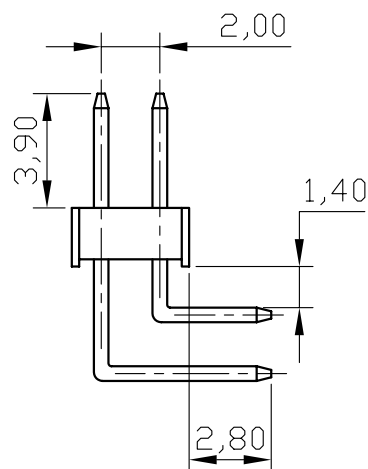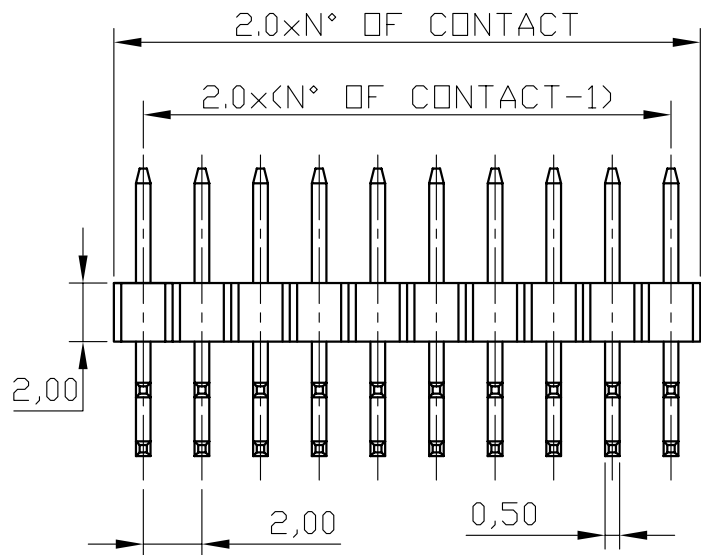

P.C.Board Layout

### SPECIFICATIONS

Current Rating: 2Amps  
Dielectric Withstanding AC 500V  
Operating Temperature: -40°C to 105°C  
Max Process Temp: 230°C for 30~60 seconds  
(260°C for 10 seconds)

### MATERIAL & FINISH

Contact Brass  
Insulator Material: PBT  
Color: Black  
Finish: Gold Flash Plated Over Nickel

### HOW TO ORDER:

PIN[ ][D][R][ ]S2[I][ ][R]  
1 2 3 4 5 6 7

- 1- Nr. of Ways  
Single Row: 1 to 40  
Double Row: 2 to 80
- 2- Row Version:  
(S)-Single Row  
(D)-Double Row
- 3- Pin Style  
(R)-90°  
(S)-180°
- 4- Terminal Plating:  
(E)-Sn  
(D)-FLASH Au  
(F)-0,38um Au  
(G)-0,76um Au  
(C)-0,38um Au/Sn  
(H)-0,76um Au/Sn
- 5- Profile:  
(I)-2,0mm
- 6- Options:  
(T)-Tube Packing
- 7- (R) RoHS Compliant



**MATRIX Tecnologia Ind. e Com. Ltda.**

0.0±	SCALE	TITLE	DATE JULY 2007
0.00±	UNIT mm	2.00mm PIN HEADER HEIGHT 2.0mm 90° DOUBLE ROW	APP. BY
0.000±		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO