


|      |                |     |      |
|------|----------------|-----|------|
| REV/ | ECN. NO.       | APP | DATE |
| A    | EDIÇÃO INICIAL |     |      |
|      |                |     |      |
|      |                |     |      |

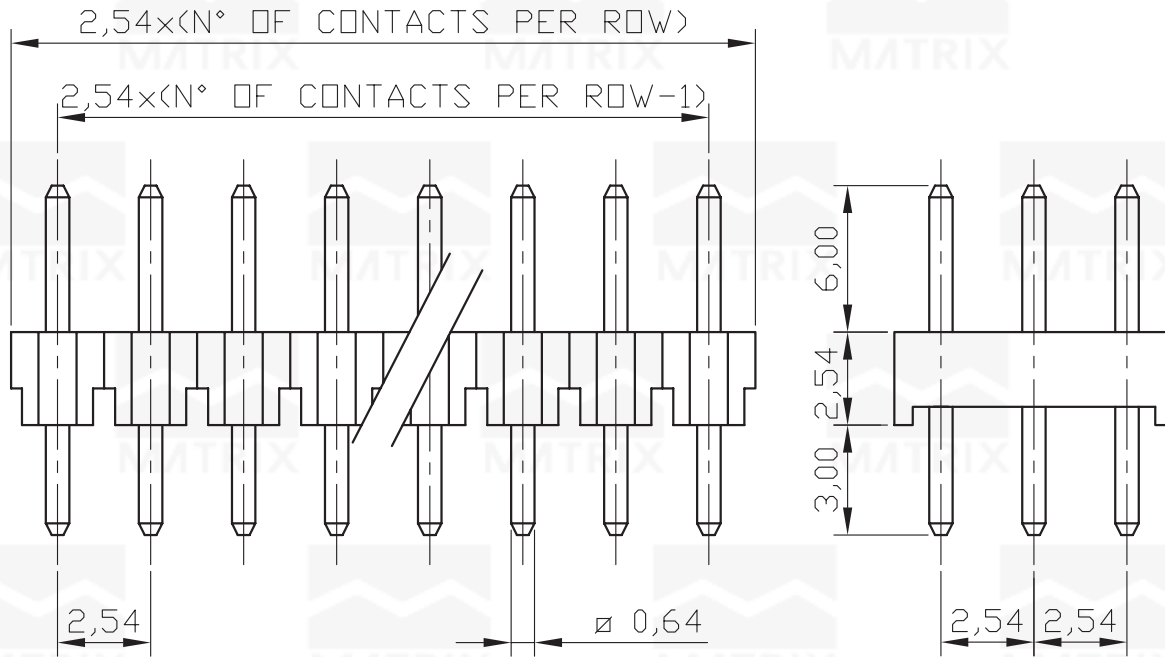

**SPECIFICATIONS**

Current Rating: 3 Amps  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40°C to +105°C  
 Max Processing Temp: 230° for 30~60 seconds  
 (260° for 10 seconds)


**MATERIAL**

Contact: Brass  
 Insulator Material: PBT  
 Color: Black

**HOW TO ORDER:  
 PIN-[ ]-[T]-[ ]-[ ]-[S]-[ ]**

- |  |  |
|--|--|
| 1- Nr. of Ways<br>Triple row: 3 to 120 | 4- Terminal Plating:<br>(E)-Sn<br>(F)-FLASH Au<br>(A)-0,38um Au<br>(B)-0,76um Au<br>(C)-0,38um Au/Sn<br>(D)-0,76um Au/Sn |
| 2- Row Version:<br>(T)-Triple Row      |  |
| 3- Pin Style<br>(N)-90°<br>(R)-180°    | 5- (R) RoHS Compliant  |

 **MATRIX Tecnologia Ind. e Com. Ltda.**

|   |       |   |              |           |
|---|-------|---|--------------|-----------|
| 0.0±  | SCALE | TITLE<br>2,54mm PIN HEADER HEIGHT<br>2,54mm 180° TRIPLE ROW | DATE         | JUNE 2007 |
| 0.00±   |       |   | APP. BY      |           |
| 0.000±  | UNIT  | mm  | CHK. BY      |           |
|  |       | MATL  | DR. BY DIEGO |           |
|   |       | DWG. NO.  |              |           |