

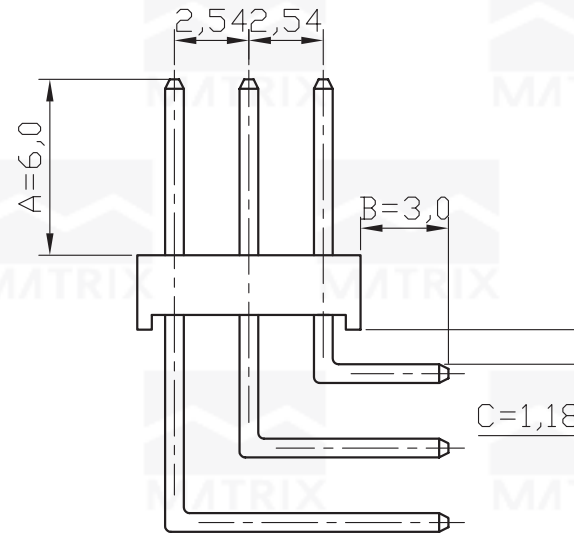
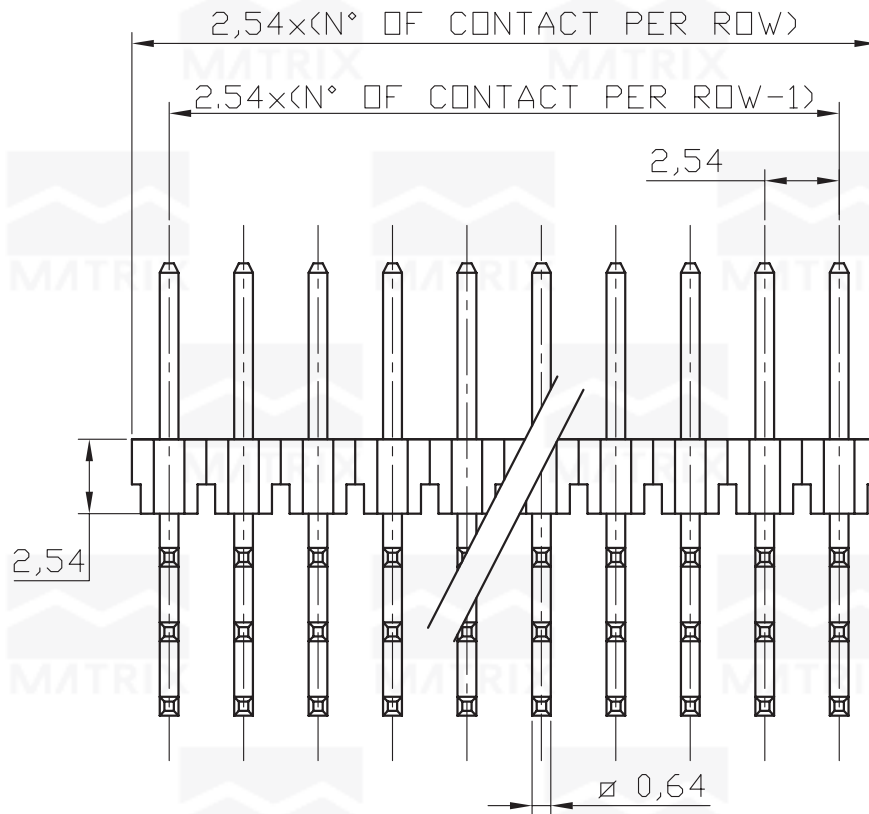
REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

SPECIFICATIONS

Current Rating: 3 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)




MATERIAL

Contact: Brass
 Insulator Material: PBT
 Color: Black



**HOW TO ORDER:
 PIN-[]-[T]-[N]-[]-[S]-[]**

- | | | | | |
|--|-----------------------------------|-------------------------------------|--|-----------------------|
| 1 | 2 | 3 | 4 | 5 |
| 1- Nr. of Ways
Triple row: 3 to 120 | 2- Row Version:
(T)-Triple Row | 3- Pin Style
(N)-90°
(R)-180° | 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn | 5- (R) RoHS Compliant |

 MATRIX Tecnologia Ind. e Com. Ltda.			
0.0±	SCALE	TITLE	DATE JUNE 2007
0.00±		2,54mm PIN HEADER HEIGHT	APP. BY
0.000±		UNIT mm	
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO