



REV/	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
A	REV. OPÇÕES DE EMBALAGENS		12/2010

SPECIFICATIONS

Current Rating: 3 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)

MATERIAL

Contact: Brass
 Insulator Material: PBT
 Color: Black

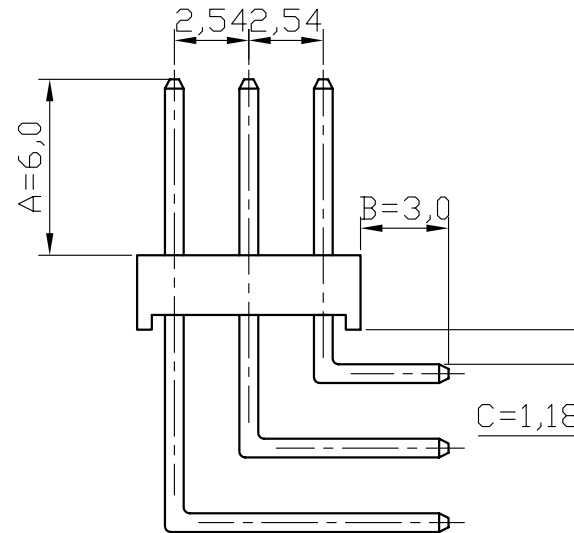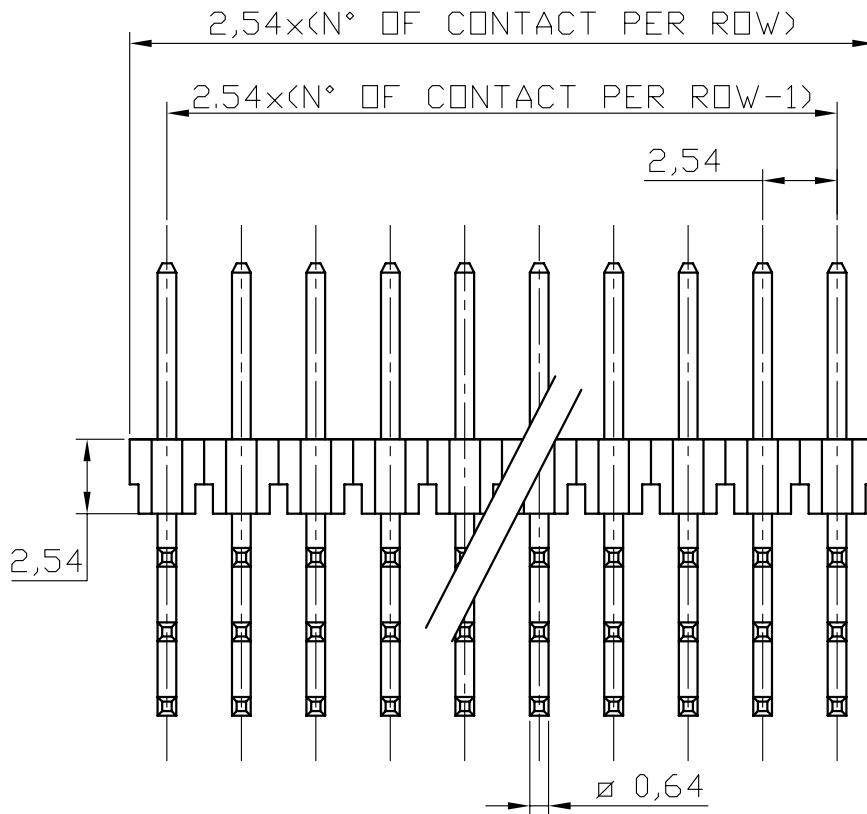

HOW TO ORDER:
 PIN[] [T] [N] [] [S] [] [R]
 1 2 3 4 5

- 1- Nr. of Ways
Triple row: 3 to 120
- 2- Row Version:
(T)-Triple Row
- 3- Pin Style
(N)-90°
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn
- 5- Options:
(T)-Tube Packing
6- (R) RoHS Compliant



MATRIX Tecnologia Ind. e Com. Ltda.

0.0±	SCALE	TITLE	DATE	DECEMBER 2010
0.00±	UNIT mm	2,54mm PIN HEADER HEIGHT	APP. BY	
0.000±		2,54mm 90° TRIPLE ROW		
		MATL	CHK. BY	
		DWG. NO.	DR. BY Gabriel Zandoná	