
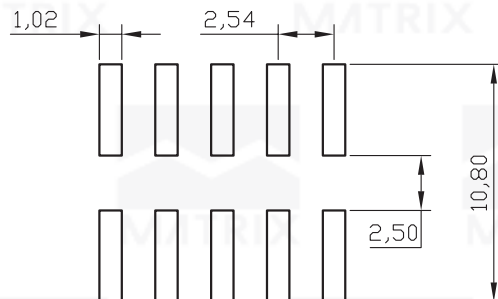
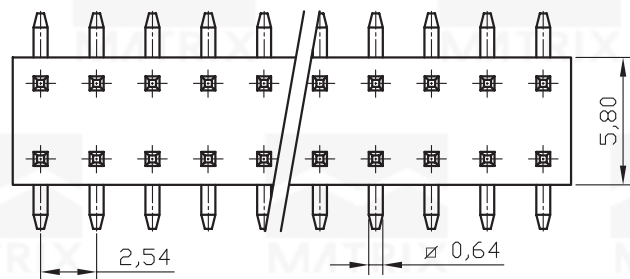



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

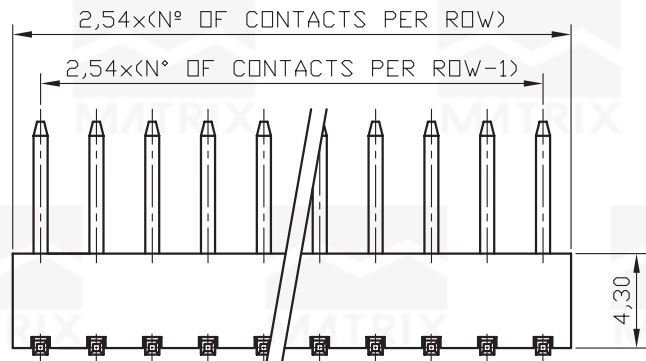

RECOMMENDED P.C. BOARD LAYOUT

SPECIFICATIONS

Current Rating: 3Amp
 Dielectric Withstanding: 600V AC/DC
 Temperature Range: -40°C to +105°C
 Contact Resistance: 20mΩ max.
 Insulation Resistance: 1000MΩ min.

HOW TO ORDER: PIN-[]-[D]-[R]-[]-S-SMD-P4,3-[]

- | | | | | |
|---------------------------------------|-----------------------------------|--------------------------|--|-----------------------|
| 1- Nr. of Ways
Double Row: 2 to 80 | 2- Row Version:
(D)-Double Row | 3- Pin Style
(R)-180° | 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn | 5- (R) RoHS Compliant |
|---------------------------------------|-----------------------------------|--------------------------|--|-----------------------|



MATRIX Tecnologia Ind. e Com. Ltda.

0.0±	SCALE	TITLE	DATE
0.00±	UNIT mm	2,54mm PIN HEADER HEIGHT	JUNE 2007
0.000±		4,3mm 180° SMT DOUBLE ROW	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO