
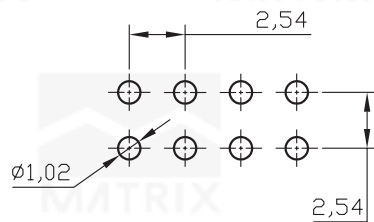
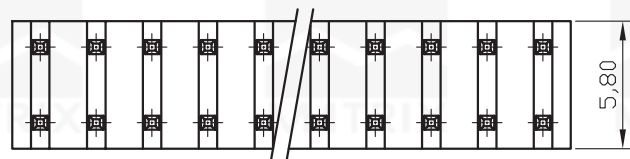


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

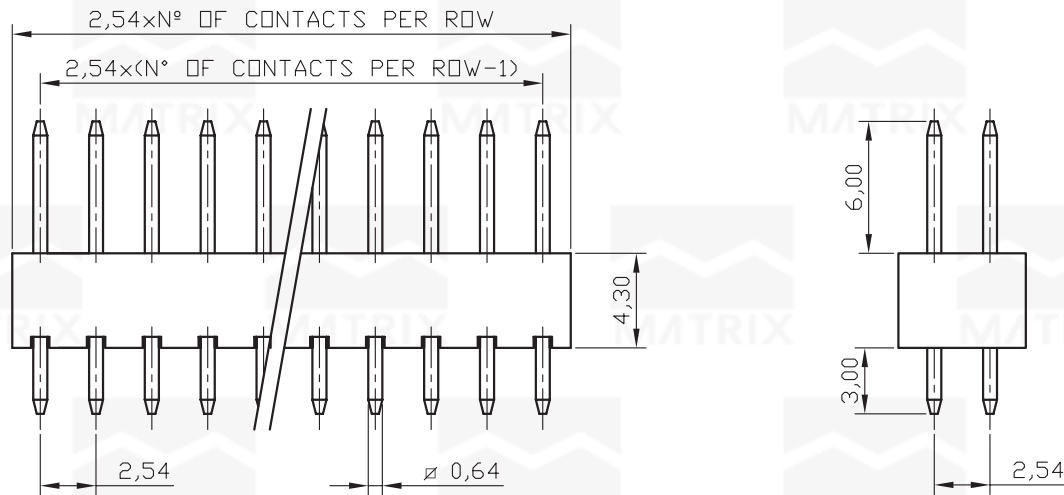

RECOMMENDED P.C. BOARD HOLE LAYOUT

SPECIFICATIONS

Electrical

Current Rating: 3Amp

Dielectric Withstanding: 600V AC/DC

Temperature Range: -40°C to +105°C

Contact Resistance: 20mΩ max.

Insulation Resistance: 1000MΩ min.

Material

Insulator: Polyester, UL94V-0, P.B.T

Contact: Copper Alloy

HOW TO ORDER: PIN-[]-[D]-[R]-[]-S-P4,3-[]

1 2 3 4 5


- | | |
|---------------------------------------|--|
| 1- Nr. of Ways
Double Row: 2 to 80 | 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn |
| 2- Row Version:
(D)-Double Row | |
| 3- Pin Style
(N)-90°
(R)-180° | 5-(R) RoHS Compliant |



MATRIX Tecnologia Ind. e Com. Ltda.

0.0±	SCALE	TITLE	DATE
0.00±	UNIT mm	2,54mm PIN HEADER HEIGHT	JUNE 2007
0.000±		4,3mm 180° DOUBLE ROW	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

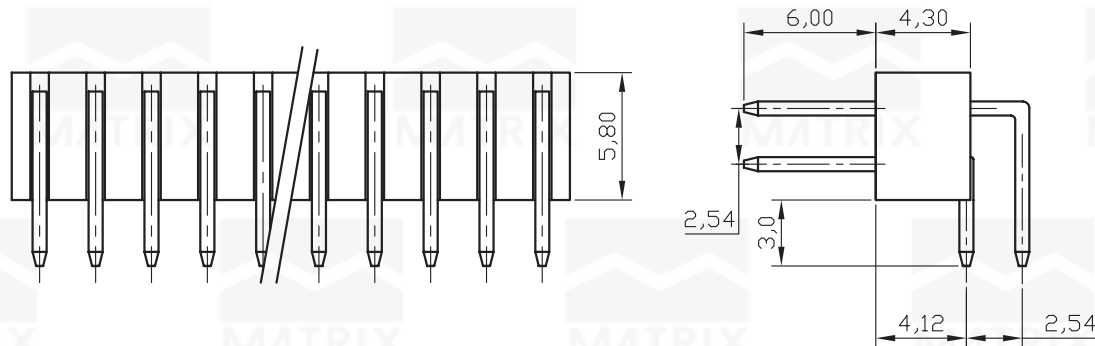


SPECIFICATIONS

Electrical
 Current Rating: 3Amp
 Dielectric Withstanding: 600V AC/DC
 Temperature Range: -40°C to +105°C
 Contact Resistance: 20mΩ max.
 Insulation Resistance: 1000MΩ min.


Material

Insulator: Polyester, UL94V-0, P.B.T
 Contact: Copper Alloy

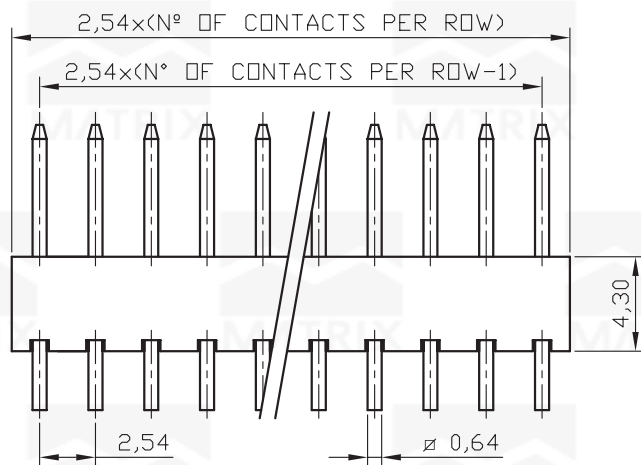

HOW TO ORDER:
PIN-[]-[D]-[N]-[]-S-P4,3-[]
1 2 3 4 5

- 1- Nr. of Ways
Double Row: 2 to 80
- 2- Row Version:
(D)-Double Row
- 3- Pin Style
(N)-90°
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn
- 5-(R) RoHS Compliant

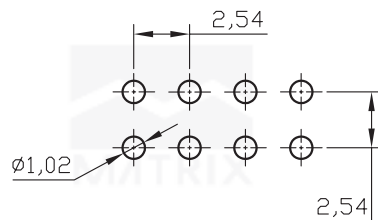

RECOMMENDED P.C. BOARD
HOLE LAYOUT



MATRIX Tecnologia Ind. e Com. Ltda.

0.0±	SCALE	TITLE	DATE
0.00±	UNIT mm	2,54mm PIN HEADER HEIGHT	JUNE 2007
0.000±		4,3mm 90° DOUBLE ROW	APP. BY
	MATL	CHK. BY	
	DWG. NO.	DR. BY	DIEGO