
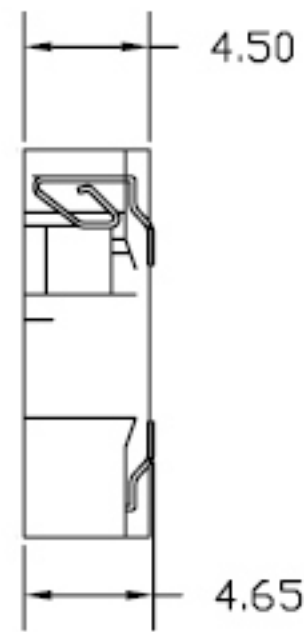


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

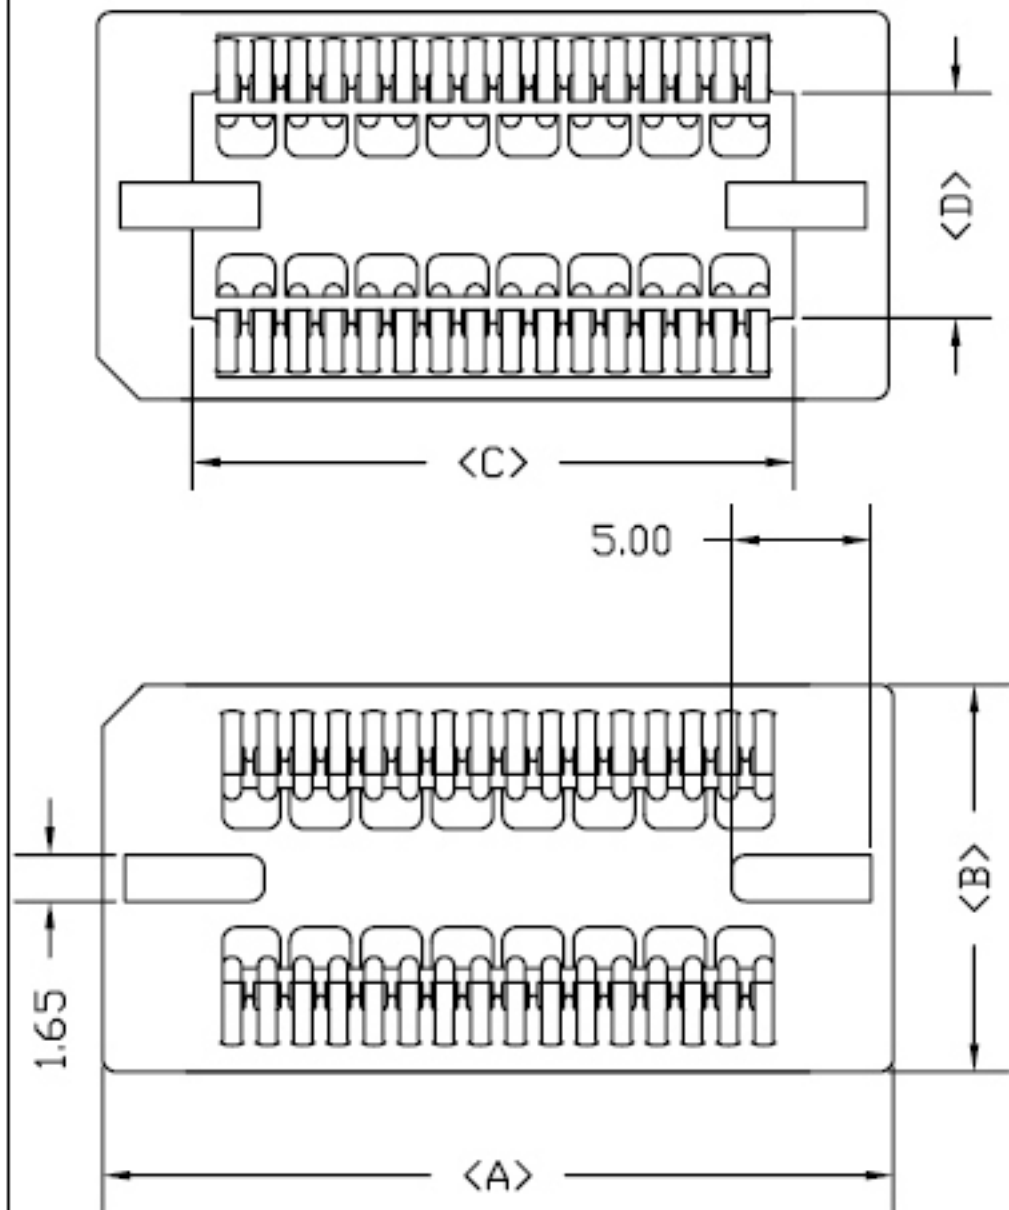

**PERFORMANCE SPECIFICATION:**


CURRENT: 1 AMPERE MAX.

OPERATING TEMPERATURE: -55°C TO +105°C.

INSULATION RESISTANCE: 10,000 MEGOHMS MIN. INITIAL.

NORMAL FORCE: 200 GRAMS MIN. ON TIN/TIN AND INTERFACE.

DURABILITY: 40 CYCLES MIN.

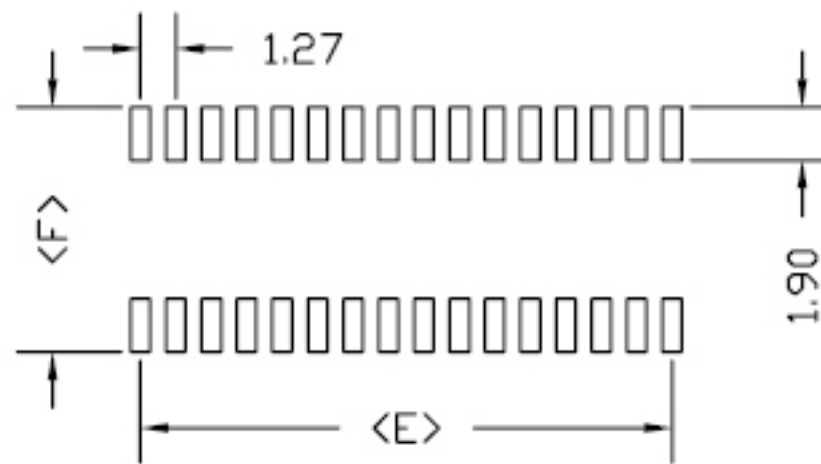

P. C. B LAYOUT

**HOW TO ORDER:  
MX-SOJ-[ ]-[ ]-[ ]-[ ]**

- |  |  |
|--|--|
| 1- Nr. of Ways:<br>Table   | 3- Polarization<br>(P)-With Peg<br>( )-Without Peg |
| 2- Terminal Plating<br>(T)-Tinned<br>Other Plating on<br>Request | 4- (R)-RoHS Compliant                              |

PART NO.	A±0.2	B±0.2	C±0.2	D±0.2	E±0.2	F±0.2
24	23.26	13.87	16.36	8.05	13.97	8.76
26	24.53	13.87	17.63	8.05	15.24	8.76
28	25.80	13.87	18.90	8.05	16.51	8.76
32	28.34	13.87	21.44	8.05	19.05	8.76
28	25.80	16.41	18.90	10.7	16.51	11.3
32	28.34	16.41	21.44	10.7	19.50	11.3
40	33.40	16.41	26.50	10.7	24.13	11.3
42	34.67	16.81	27.77	10.7	25.40	11.3



**MATRIX Tecnologia Ind. e Com. Ltda.**

UNIT mm	SCALE	TITLE SOJ Socket 1.27mm	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Dino