
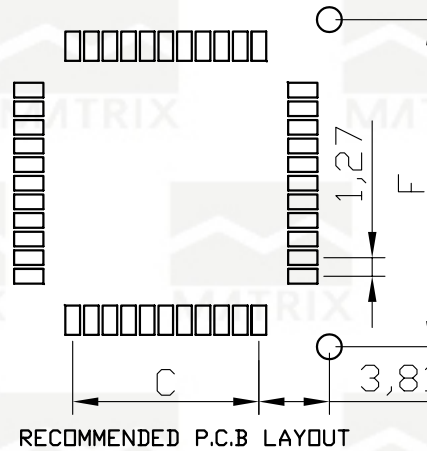


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

SPECIFICATIONS

Contact Resistance: 30MΩ MAX at DC 100mA
 Insulator Resistance: 1000MΩ Min. at DC 500V
 Current Rating: 1Amp
 Dielectric Withstanding Voltage: AC 500V for 1 minute
 Temperature Rating: -55°C to 105°C

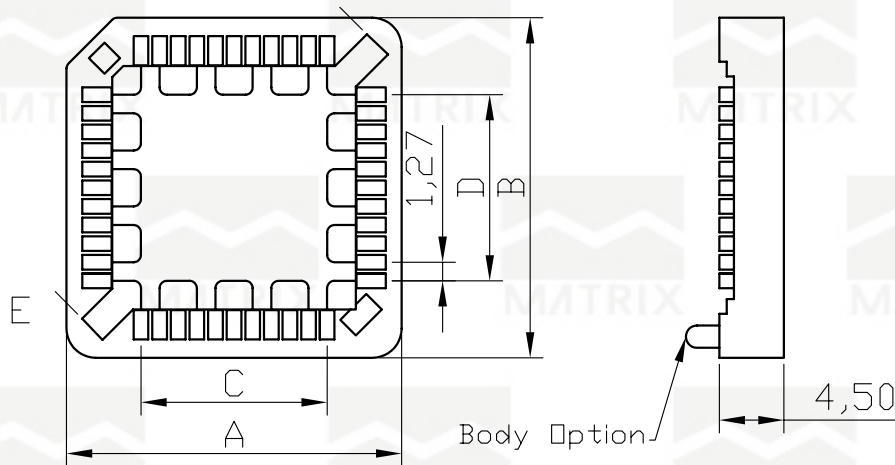

**HOW TO ORDER:
 PLCC-[]-SMD-[]-[]**
 1 2 3

- 1- Nr. of Ways
(20, 28, 32, 44, 52, 68, 84)
- 2- Insulator:
(HT)-High Temperature
(P) -Standard
- 3- (R) RoHS Compliant

N° of Ways	A	B	C	D	E	F
20	15,24	15,24	5,08	5,08	16,70	12,70
28	17,78	17,78	7,62	7,62	20,30	15,24
32	18,20	20,74	7,62	10,16	22,76	17,78
44	23,28	23,28	12,70	12,70	28,05	20,32
52	25,40	25,40	15,24	15,24	31,10	22,86
68	30,82	30,82	20,32	20,32	38,30	27,94
84	35,90	35,90	25,40	25,40	45,50	33,02



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 2:1	TITLE	DATE August 2007
TOLERANCE: ±0.25		PLCC 1.27mm SMT Type	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DINO