
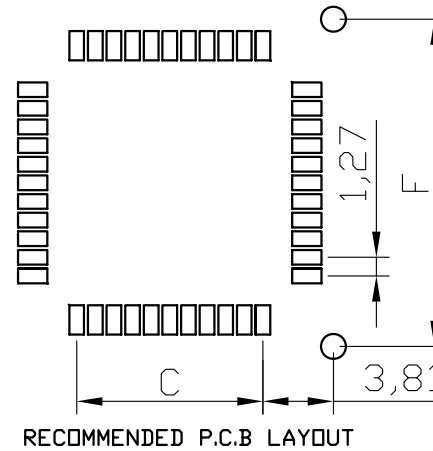


| | | | |
|-----|----------------|-----|------|
| REV | ECN. NO. | APP | DATE |
| A | EDIÇÃO INICIAL | | |
| B | NOVO CÓDIGO | | |
| | | | |
| | | | |

SPECIFICATIONS

Contact Resistance: 30MΩ MAX at DC 100MA
 Insulator Resistance: 1000MΩ Min. at DC 500V
 Current Rating: 1Amp
 Dielectric Withstanding Voltage: AC 500V for 1 minute
 Temperature Rating: -55°C to 105°C

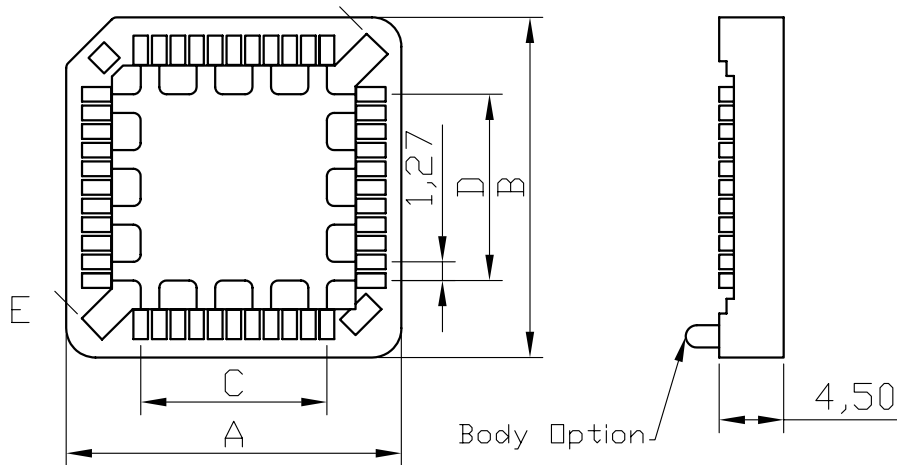

**HOW TO ORDER:
 PLCC[]D[]R
 1 2**

- 1- Nr. of Ways
(20, 28, 32, 44, 52, 68, 84)
- 2- Insulator:
(HT)-High Temperature
(P) -Standard

| N° of Ways | A | B | C | D | E | F |
|------------|-------|-------|-------|-------|-------|-------|
| 20 | 15,24 | 15,24 | 5,08 | 5,08 | 16,70 | 12,70 |
| 28 | 17,78 | 17,78 | 7,62 | 7,62 | 20,30 | 15,24 |
| 32 | 18,20 | 20,74 | 7,62 | 10,16 | 22,76 | 17,78 |
| 44 | 23,28 | 23,28 | 12,70 | 12,70 | 28,05 | 20,32 |
| 52 | 25,40 | 25,40 | 15,24 | 15,24 | 31,10 | 22,86 |
| 68 | 30,82 | 30,82 | 20,32 | 20,32 | 38,30 | 27,94 |
| 84 | 35,90 | 35,90 | 25,40 | 25,40 | 45,50 | 33,02 |



MATRIX Tecnologia Ind. e Com. Ltda.

| | | | |
|------------------|--------------|-------------------------------|-----------------------|
| UNIT mm | SCALE 2:1 | TITLE PLCC 1.27mm SMT Type | DATE DECEMBER 2009 |
| TOLERANCE: ±0.25 | | APP. BY | |
| | | MATL | CHK. BY |
| | | DWG. NO. | DR. BY FELIPE |