
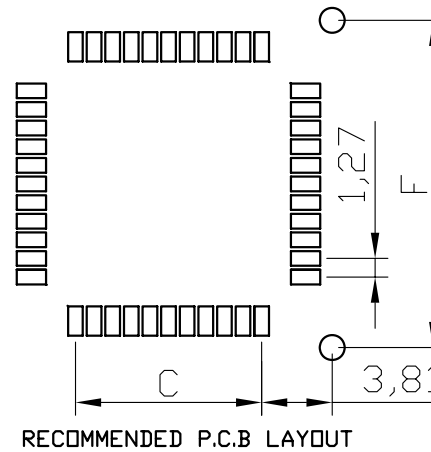


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		
C	CÓD. ANT. : PLCCxDxR		12/2011

SPECIFICATIONS

Contact Resistance: 30MΩ MAX at DC 100MA
 Insulator Resistance: 1000MΩ Min. at DC 500V
 Current Rating: 1Amp
 Dielectric Withstanding Voltage: AC 500V for 1 minute
 Temperature Rating: -55°C to 105°C

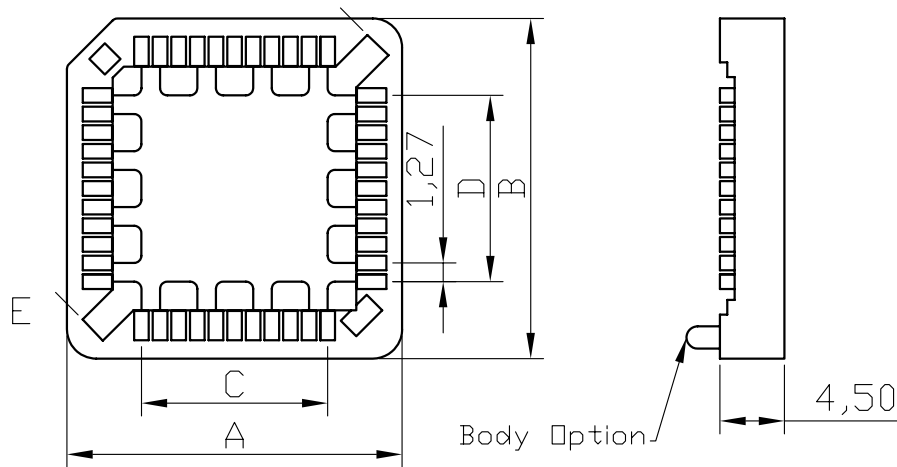

HOW TO ORDER:
PLCC[]D[HT][R]
 1 2 3

1 - Nr of Ways:
 20, 28, 32, 44, 52, 68, 84

3 - (R) RoHS Compliant

2 - Insulator:
 (HT) - Brown High Temperature (PPS)

Other Option: For Gold Flash
 Contact Plating add letter D after
 option 2

N° of Ways	A	B	C	D	E	F
20	15,24	15,24	5,08	5,08	16,70	12,70
28	17,78	17,78	7,62	7,62	20,30	15,24
32	18,20	20,74	7,62	10,16	22,76	17,78
44	23,28	23,28	12,70	12,70	28,05	20,32
52	25,40	25,40	15,24	15,24	31,10	22,86
68	30,82	30,82	20,32	20,32	38,30	27,94
84	35,90	35,90	25,40	25,40	45,50	33,02



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT	SCALE	TITLE	DATE
mm	2:1	PLCC 1.27mm SMT Type	DECEMBER 2009
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY FELIPE