


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

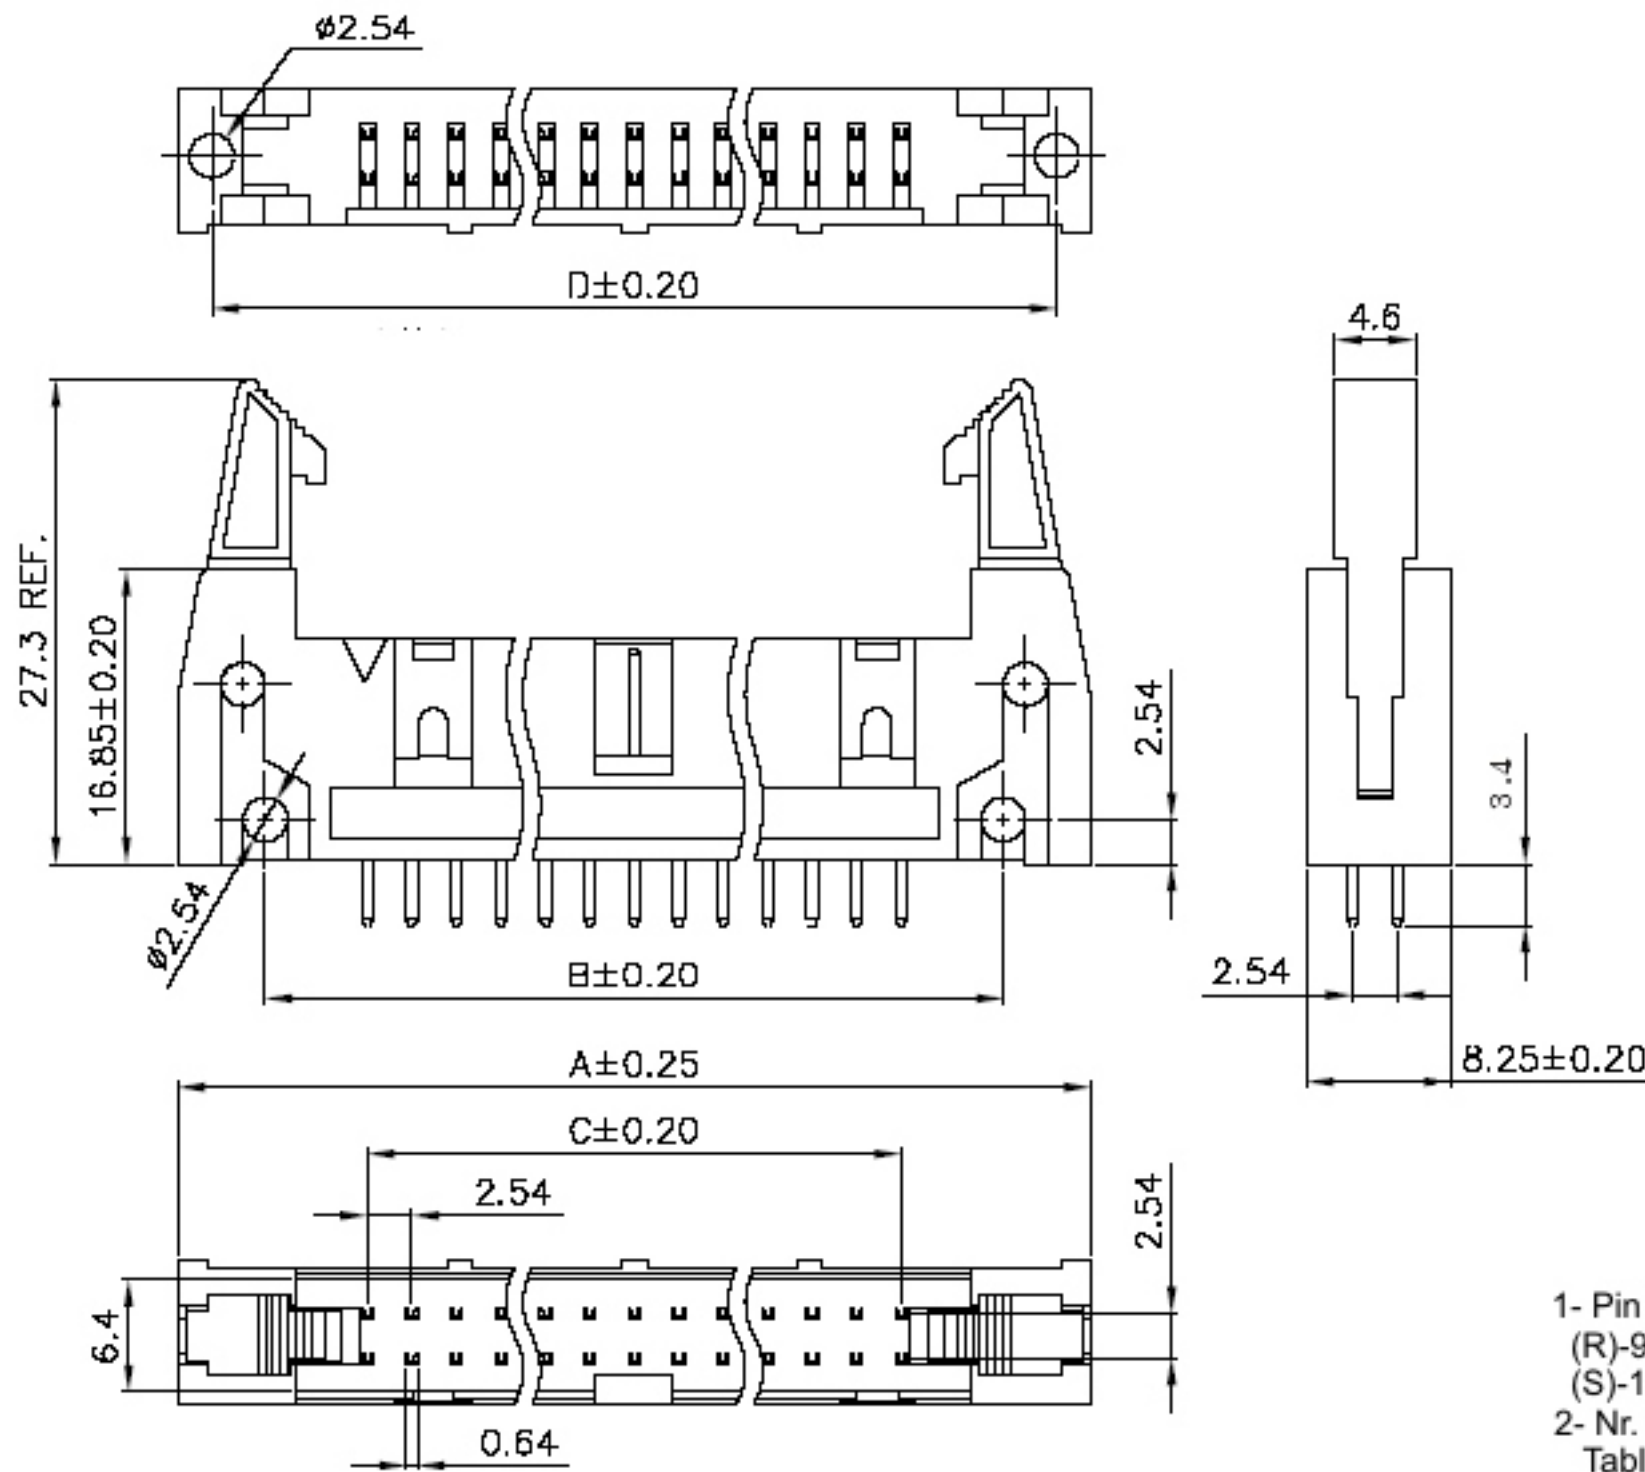

Specification:  
 Current Rating: 3 Amp.  
 Withstanding Voltage: AC 500V for 1 Minute.  
 Insulation Resistance: 1000MΩ Min. at DC 500V.  
 Contact Resistance: 15mΩ Max.  
 Operating Temperature: -40°C ~ +105°C.

### HOW TO ORDER: MX-2216-[ ]-[ ]-[ ]-[ ]-[ ]

1 2 3 4 5

- |                                     |  |  |
|-------------------------------------|--|--|
| 1- Pin Style<br>(R)-90°<br>(S)-180° | 3- Terminal Plating:<br>(D)-FLASH Au<br>(F)-0,38um Au<br>(G)-0,76um Au<br>(C)-0,38um Au/Sn<br>(H)-0,76um Au/Sn | 4- Latch:<br>(00)-W/O Latch<br>(01)-Short Latch<br>(02)-Long Latch |
| 2- Nr. of Ways<br>Table             |  | 5- (R) RoHS Compliant  |

Pos.	Dim. A	Dim. B	Dim. C	Dim. D
10	31.90	21.84	10.16	27.94
14	36.98	26.92	15.24	33.02
16	39.52	29.46	17.78	35.56
20	44.60	34.54	22.86	40.64
24	49.68	39.62	27.94	45.72
26	52.22	42.16	30.48	48.26

Pos.	Dim. A	Dim. B	Dim. C	Dim. D
30	57.30	47.24	35.56	53.34
34	62.38	52.32	40.64	58.42
40	70.00	59.94	48.26	66.04
50	82.70	72.64	60.96	78.74
60	95.40	85.34	73.66	91.44
64	100.48	90.42	78.74	96.52

**MATRIX** **MATRIX Tecnologia Ind. e Com. Ltda.**

UNIT mm	SCALE	TITLE 2.54mm Ejector Box Header 180°	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego