

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

SPECIFICATIONS

Rating: 10A, 300VAC.

Insulation Withstands Voltage: AC 1500V/Min.


Insulation Resistance: 500MΩ or more at DC 500V.

Suitable Electric Wire: AWG 24 to 18 STR.

Screw: Zinc Plated Steel

Terminals: Tin Plated Brass

Body Material: Thermoplastic (UL94V-0)

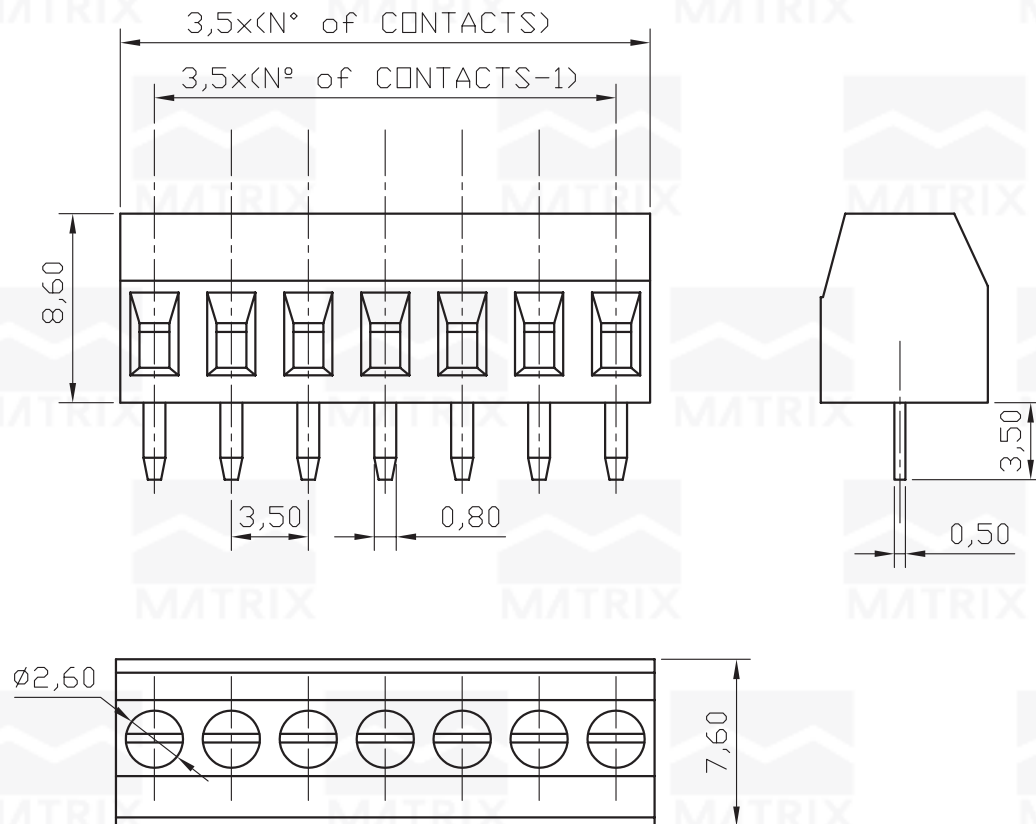


HOW TO ORDER:
MX-5523-[]-8,6-3,5-[]

1 **2**

1- Nr. of Ways
2- (R)-RoHS Compliant

P.C.Board Layout

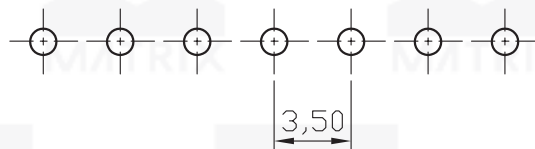

MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 3:1	TITLE 3,5mm TERMINAL BLOCK 180° H=8,60mm	DATE September 2007
TOLERANCE: ± 0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego