


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

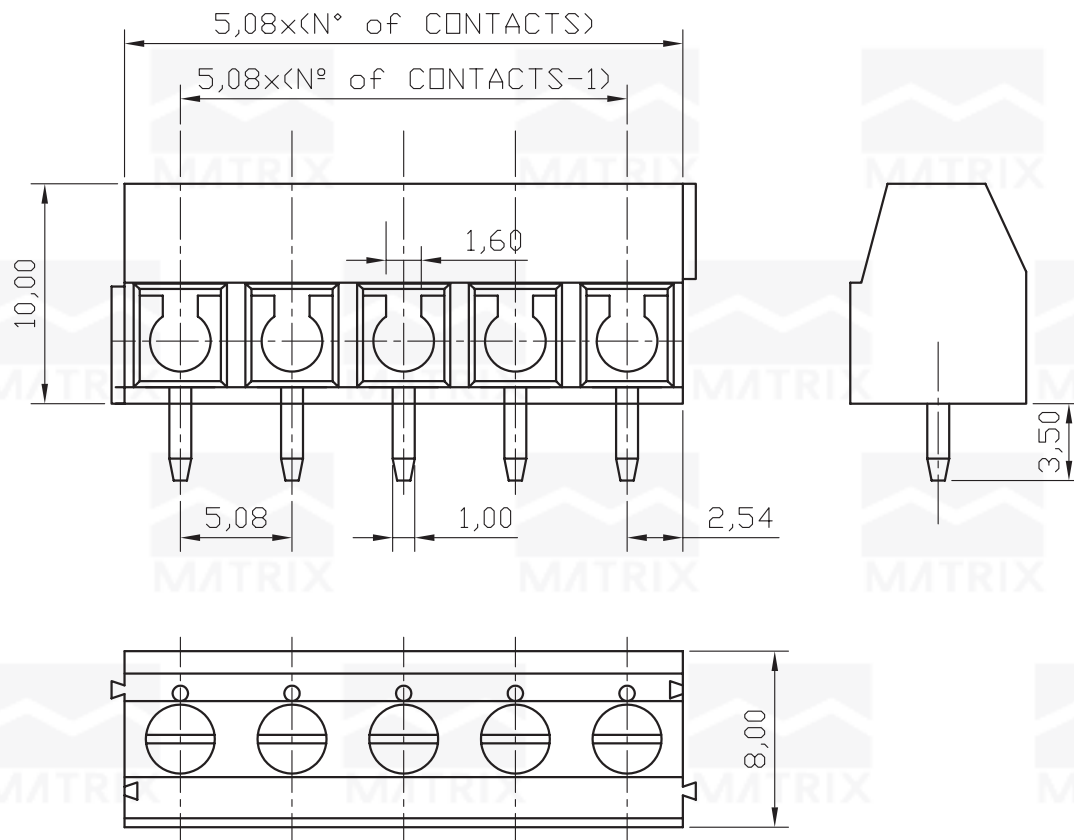

SPECIFICATIONS

Current Rating: 300V 15A.
 Insulation Withstands Voltage: AC 1500V/Min.
 Insulation Resistance: 500MΩ or more at DC 500V.
 Operating Temperature: -40°C to 105°C.
 Screw Torque Value: 4Kg-cm.
 Suitable Electric Wire: AWG 24 to 14.


HOW TO ORDER:
MX-5523-[]-10-5.08-[]
1 2

1- Nr. of Ways
 2- (R)-RoHS Compliant

P.C.Board Layout



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 3:1	TITLE 5,08mm Terminal Block 180° H=10,00mm	DATE August 2007
TOLERANCE: ± 0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego