


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	NOVO CÓDIGO		

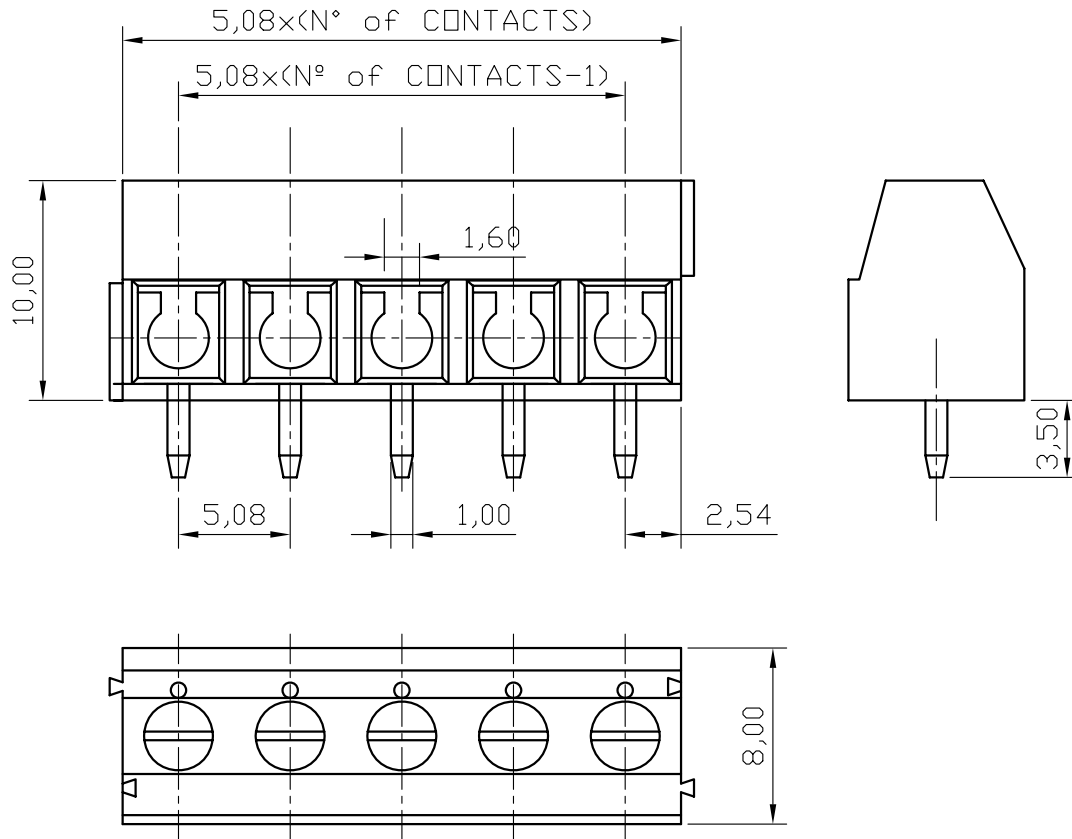

### SPECIFICATIONS

Current Rating: 300V 15A.  
 Insulation Withstands Voltage: AC 1500V/Min.  
 Insulation Resistance: 500MΩ or more at DC 500V.  
 Operating Temperature: -40°C to 105°C.  
 Screw Torque Value: 4Kg-cm.  
 Suitable Electric Wire: AWG 24 to 14.


### HOW TO ORDER:



**5523[ ]B5.08R**

**1**

1- Nr. of Ways

### P.C.Board Layout

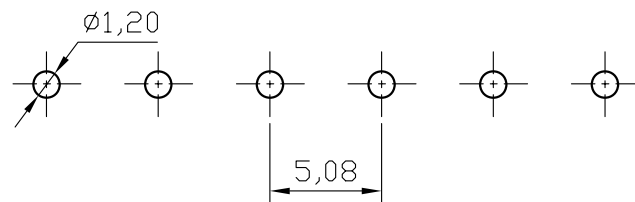

 <b>MATRIX Tecnologia Ind. e Com. Ltda.</b>			
UNIT mm	SCALE 3:1	TITLE 5,08mm Terminal Block 180° H=10,00mm	DATE JANUARY 2010
TOLERANCE: $\pm 0.25$			APP. BY
		MATL	CHK. BY
DWG. NO.			DR. BY FELIPE